

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22628 A1

(51) International Patent Classification⁷: H04B 10/18

(21) International Application Number: PCT/US00/26157

(22) International Filing Date:
21 September 2000 (21.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/405,367 24 September 1999 (24.09.1999) US
09/569,761 12 May 2000 (12.05.2000) US

(71) Applicant: KESTREL SOLUTIONS, INC. [US/US];
2495 Leghorn Street, Mountain View, CA 94043 (US).

(72) Inventors: NEWELL, Laurence, J.; 13890 River Ranch
Circle, Saratoga, CA 95070 (US). COWARD, James, R.;
20455 Skyline Boulevard, La Honda, CA 94020 (US).

(74) Agents: FARN, Michael, W. et al.; Fenwick & West LLP,
Two Palo Alto Square, Palo Alto, CA 94306 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHANNEL GAIN CONTROL FOR AN OPTICAL COMMUNICATIONS SYSTEM UTILIZING FREQUENCY DIVISION MULTIPLEXING

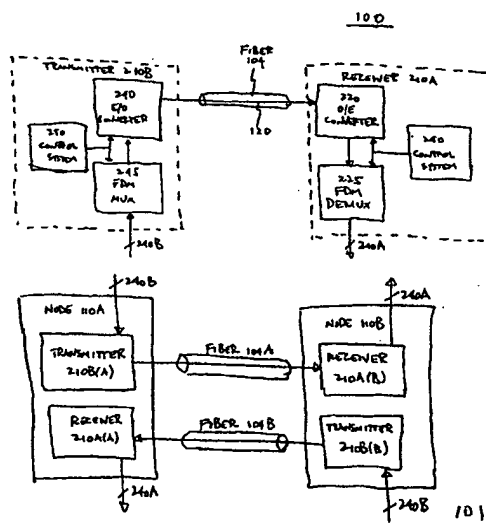

(57) Abstract: Frequency-dependent gain effects in an optical fiber communications system, such as fiber dispersion, may be compensated. A number of low-speed channels is to be transmitted across an optical fiber communications system. Each low-speed channel is allocated a different frequency band of the optical fiber communications system. The gain, including both attenuation and amplification, of the communications system at each of the frequency bands is estimated. The power of each low-speed channel is adjusted to compensate for the estimated gain effects. In a preferred embodiment, the low-speed channels are frequency division multiplexed together to produce an electrical high-speed channel suitable for transmission across the communications system.

CHANNEL GAIN CONTROL FOR AN OPTICAL COMMUNICATIONS SYSTEM
UTILIZING FREQUENCY DIVISION MULTIPLEXING

Inventors: Laurence J. Newell
James F. Coward

BACKGROUND OF THE INVENTION

1. **Field of the Invention**

This invention relates generally to optical fiber communications, and more particularly, to the use of independent gain control for different frequency channels in an optical fiber communications systems utilizing frequency division multiplexing.

2. **Description of the Related Art**

As the result of continuous advances in technology, particularly in the area of networking, there is an increasing demand for communications bandwidth. For example, the growth of the Internet, home office usage, e-commerce and other broadband services is creating an ever-increasing demand for communications bandwidth. Upcoming widespread deployment of new bandwidth-intensive services, such as xDSL, will only further intensify this demand. Moreover, as data-intensive applications proliferate and data rates for local area networks increase, businesses will also demand higher speed connectivity to the wide area network (WAN) in order to support virtual private networks and high-speed Internet access. Enterprises that currently access the WAN through T1 circuits will require DS-3, OC-3, or equivalent connections in the near future. As a result, the networking infrastructure will be required to accommodate greatly increased traffic.

Optical fiber is a transmission medium that is well suited to meet this increasing demand. Optical fiber has an inherent bandwidth which is much greater than metal-based conductors, such as twisted pair or coaxial cable. There is a significant installed base of

optical fibers and protocols such as the SONET protocol have been developed for the transmission of data over optical fibers. The transmitter converts the data to be communicated into an optical form and transmits the resulting optical signal across the optical fiber to the receiver. The receiver recovers the original data from the received optical
5 signal. Recent advances in transmitter and receiver technology have also resulted in improvements, such as increased bandwidth utilization, lower cost systems, and more reliable service.

However, current optical fiber systems also suffer from drawbacks which limit their performance and/or utility, and many of these drawbacks are frequency dependent. For
10 example, optical fibers typically exhibit dispersion, meaning that signals at different frequencies travel at different speeds along the fiber. More importantly, if a signal is made up of components at different frequencies, the components travel at different speeds along the fiber and will arrive at the receiver at different times and/or with different phase shifts. As a result, the components may not recombine correctly at the receiver, thus distorting or
15 degrading the original signal. In fact, at certain frequencies, the dispersive effect may result in destructive interference at the receiver, thus effectively preventing the transmission of signals at these frequencies. Dispersion effects may be compensated by installing special devices along the fiber specifically for this purpose. However, the additional equipment results in additional cost and different compensators will be required for different types and
20 lengths of fiber.

As another example, the electronics in an optical fiber system typically will have a transfer function which is not flat. That is, the electronics will exhibit different gain at different frequencies. In other applications, an electronic equalizer may be used to compensate for these frequency-dependent gain variations in the electronics. However, in an
25 optical fiber system, the electronics produce an electrical signal which eventually is converted to/from an optical form. In order to take advantage of the wide bandwidth of optical fibers, the electrical signal produced by the electronics preferably will have a

bandwidth matched to the wide bandwidth of the optical fiber. Hence, any electronic equalizer will also have to operate over a wide bandwidth, which makes equalization difficult and largely impractical.

Thus, there is a need for optical communications systems which reduce or eliminate
5 the deleterious effects caused by frequency-dependent effects, such as fiber dispersion and the non-flat transfer function of electronics in the system.

SUMMARY OF THE INVENTION

In accordance with the present invention, a method for compensating for frequency-
10 dependent gain effects in an optical fiber communications system includes the following steps. At least two low-speed channels are received. Each low-speed channel is allocated a different frequency band of the optical fiber communications system for transmission across the communications system. The gain, including both attenuation and amplification, of the communications system at each of the frequency bands is estimated. The power of each low-
15 speed channel is adjusted to compensate for the estimated gain effects, for example to maintain a certain power or performance metric (such as channel error rate) after transmission across the communications system. In a preferred embodiment, the low-speed channels are frequency division multiplexed together to produce an electrical high-speed channel suitable for transmission across the communications system.

20 In one alternative, the estimated gain includes an estimate for gain due to propagation through an optical fiber in the communications system. For example, the estimated gain could include losses due to dispersion at the various frequency bands. In another alternative, the gain is estimated by receiving a feedback signal based on the low-speed channel after it has been transmitted across the optical fiber communications system. The power of the low-
25 speed channel is adjusted responsive to the feedback signal.

In another aspect of the invention, an optical fiber communications system for transmitting at least two low-speed channels across the communications system includes a variable gain block coupled to a frequency division multiplexer. Each low-speed channel is allocated a frequency band of the communications system. The variable gain block adjusts
5 the power of each low-speed channel to compensate for an estimated gain of the communications system at the frequency band allocated to the low-speed channel. In one embodiment, the power is adjusted in order to maintain the power received after transmission across the communications system. In another embodiment, a performance metric (such as the channel error rate) is measured after the low-speed channel has been transmitted across
10 the communications system, and the power is then adjusted in response to feedback based on the measured performance metric. The FDM multiplexer combines the power-adjusted low-speed channels into an electrical high-speed channel suitable for transmission across the communications system.

In another aspect of the invention, the communications system further includes an
15 E/O converter, an optical fiber, an O/E converter, a FDM demultiplexer and monitor circuitry, and a control system. The E/O converter converts the electrical high-speed channel from the FDM multiplexer to an optical high-speed channel, which is transported across the optical fiber. The O/E converter receives the transported channel and converts it back to an electrical high-speed channel. The FDM demultiplexer frequency division demultiplexes the
20 electrical high-speed channel into its constituent low-speed channels. The monitor circuitry is coupled to the FDM demultiplexer and generates a feedback signal responsive to the frequency division demultiplexed low-speed channels. The control system adjusts the gain applied by the variable gain block in response to the feedback signal.

The present invention is particularly advantageous because frequency-dependent gain
25 effects, such as fiber dispersion and the non-flat transfer function of electronics in the system, may be compensated.

BRIEF DESCRIPTION OF THE DRAWING

The invention has other advantages and features which will be more readily apparent from the following detailed description of the invention and the appended claims, when taken in conjunction with the accompanying drawing, in which:

5 FIG. 1A is a block diagram of a fiber optic communications system 100 in accordance with the present invention;

FIG. 1B is a block diagram of another fiber optic communications system 101 in accordance with the present invention;

FIG. 2 is a flow diagram illustrating operation of system 100;

10 FIG. 3A-3C are frequency diagrams illustrating operation of system 100;

FIG. 4A is a block diagram of a preferred embodiment of FDM demultiplexer 225;

FIG. 4B is a block diagram of a preferred embodiment of FDM multiplexer 245;

FIG. 5A is a block diagram of a preferred embodiment of low-speed output converter
270;

15 FIG. 5B is a block diagram of a preferred embodiment of low-speed input converter
275;

FIG. 6A is a block diagram of a preferred embodiment of demodulator 620;

FIG. 6B is a block diagram of a preferred embodiment of modulator 640;

FIG. 7A is a block diagram of a preferred embodiment of IF down-converter 622;

20 FIG. 7B is a block diagram of a preferred embodiment of IF up-converter 642;

FIG. 8A is a block diagram of a preferred embodiment of RF down-converter 624;
and

FIG. 8B is a block diagram of a preferred embodiment of RF up-converter 644.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1A is a block diagram of a fiber optic communications system 100 in accordance with the present invention. System 100 includes a transmitter 210B coupled to a receiver 210A by an optical fiber 104. Transmitter 210B and receiver 210A are both based on frequency division multiplexing (FDM). Transmitter 210B includes an FDM multiplexer 245
10 coupled to an E/O converter 240. The FDM multiplexer 245 combines a plurality of incoming signals 240B into a single signal using FDM techniques, and E/O converter 240 converts this single signal from electrical to optical form 120. The E/O converter 240 preferably includes an optical source, such as a laser, and an optical modulator, such as a Mach Zender modulator, which modulates the optical carrier produced by the optical source
15 with an incoming electrical signal. For convenience, the incoming signals 240B shall be referred to as low-speed channels; the single signal formed by FDM multiplexer 245 as an electrical high-speed channel, and the final optical output 120 as an optical high-speed channel.

Receiver 210A reverses the function performed by transmitter 210B, reconstructing
20 the original channels 240B at the receiver location. More specifically, receiver 120 includes an O/E converter 220 coupled to an FDM demultiplexer 225. The O/E converter 220, preferably a detector such as a high-speed PIN diode, converts the incoming optical high-speed channel 120 from optical to electrical form. The frequency division demultiplexer 225 frequency division demultiplexes the electrical high-speed channel into a plurality of low-
25 speed channels 240A.

The various components in transmitter 210B and receiver 210A are controlled by their respective control systems 290. The control systems 290 preferably also have an external port to allow external control of the transmitter 210B and receiver 210A. For example, an external network management system may manage a large fiber network, including a number
5 of transmitters 210B and receivers 210A. Alternately, a technician may connect a craft terminal to the external port to allow local control of transmitter 210B or receiver 210A, as may be desirable during troubleshooting.

Various aspects of the invention will be illustrated using the example system 100. However, the invention is not limited to this particular system 100. For example, FIG. 1B is
10 a block diagram of another fiber optic communications system 101 also in accordance with the present invention. System 101 includes two nodes 110A and 110B, each of which includes a transmitter 210B and receiver 210A. The two nodes 110 are coupled to each other by two fibers 104A and 104B, each of which carries traffic from one node 110 to the other 110. Fiber 104A carries traffic from transmitter 210B(A) to receiver 210A(B); whereas fiber
15 104B carries traffic from transmitter 210B(B) to receiver 210A(A). In a preferred embodiment, the fibers 104 also carry control or other overhead signals between the nodes 110. In an alternate embodiment, the nodes 110 may be connected by a single fiber 104 which carries bidirectional traffic. In other embodiments, the nodes 110 may contain additional functionality, such as add-drop functionality, thus allowing the nodes 110 to from
20 more complex network configurations.

FIG. 2 is a flow diagram illustrating operation of system 100. At a high level, transmitter 210B combines low-speed channels 240B into an optical high-speed channel 120 using FDM techniques (steps 318B, 316B and 314B). As part of this process, the power of each low-speed channel 240B is adjusted to compensate for estimated gain effects which the
25 low-speed channel 240B will experience while propagating through system 100 (steps 321 and 323). The gain-compensated high-speed channel 120 is then transmitted across fiber 104

(steps 312). Receiver 210A then demultiplexes the received optical high-speed channel 120 into its constituent low-speed channels 240A (steps 314A, 316A and 318A).

In more detail, low-speed channels 240B are received 318B by transmitter 210B. The FDM multiplexer 245 combines these channels into a high-speed channel using frequency
5 division multiplexing 316B techniques. Typically, each low-speed channel 240B is modulated on a carrier frequency distinct from all other carrier frequencies and these modulated carriers are then combined to form a single electrical high-speed channel, typically an RF signal. E/O converter 240 converts 314B the electrical high-speed channel to optical
10 form, preferably via an optical modulator which modulates an optical carrier with the electrical high-speed channel. The optical high-speed channel 120 is transmitted 312B across fiber 104 to receiver 210A.

FIGS. 3A-3C are frequency diagrams illustrating the mapping of low-speed channels 240B to optical high-speed channel 120 in system 100. These diagrams are based on an example in which high-speed channel 120 carries 10 billion bits per second (Gbps), which is
15 equivalent in data capacity to an OC-192 data stream. Each low-speed channel 240 is an electrical signal which has a data rate of 155 million bits per second (Mbps) and is similar to an STS-3 signal. This allows 64 low-speed channels 240 to be included in each high-speed channel 120. The invention, however, is not to be limited by this example.

FIG. 3A depicts the frequency spectrum 310 of one low-speed channel 240B after
20 pre-processing. As mentioned previously, each low-speed channel 240B has a data rate of 155 Mbps. In this example, the low-speed channel 240B has been pre-processed to produce a spectrally efficient waveform (i.e., a narrow spectrum), as will be described below. The resulting spectrum 310 has a width of approximately 72 MHz with low sidelobes. FIG. 3B is the frequency spectrum 320 of the electrical high-speed channel produced by FDM
25 multiplexer 245. Each of the 64 low-speed channels 240B is allocated a different frequency band and then frequency-shifted to that band. The signals are combined, resulting in the 64-lobed waveform 320. FIG. 3C illustrates the spectra 330 of the optical high-speed channel

120. The RF waveform 320 of FIG. 3B is intensity modulated. The result is a double sideband signal with a central optical carrier 340. Each sideband 350 has the same width as the RF waveform 320, resulting in a total bandwidth of approximately 11 GHz.

Receiver 210A reverses the functionality of transmitter 210B. The optical high-speed channel 120 is received 312A by the high-speed receiver 210A. O/E converter 220 converts 314A the optical high-speed channel 120A to an electrical high-speed channel, typically an RF signal. This electrical high-speed channel includes a number of low-speed channels which were combined by frequency division multiplexing. FDM demultiplexer 225 frequency division demultiplexes 316A the high-speed signal to recover the low-speed channels 240A, which are then transmitted 318A to other destinations. The frequency spectrum of signals as they propagate through receiver 210A generally is the reverse of that shown in FIG. 3.

Note that each low-speed channel 240 has been allocated a different frequency band for transmission from transmitter 210B to receiver 210A. For example, referring again to FIG. 3, the low frequency channel 310A may enter transmitter 210B at or near baseband. FDM multiplexer 245 upshifts this channel 310A to a frequency of approximately 900 MHz. E/O converter 240 then intensity modulates this channel, resulting in two sidelobes 350A which are 900 MHz displaced from the optical carrier 340. Low-speed channel 310A propagates across fiber 104 at these particular frequencies and is then downshifted accordingly by receiver 210A. In contrast, the high frequency channel 310N is upshifted by FDM multiplexer 245 to a frequency of approximately 5436 MHz and sidelobes 350N are correspondingly displaced with respect to optical carrier 340.

Since each low-speed channel 240 is allocated a different frequency band, each channel will typically experience a different gain as it propagates through system 100. For example, fiber losses, such as due to chromatic dispersion or polarization mode dispersion, typically will be different for sidelobes 350A and 350N since they are located at different frequencies. Similarly, the gain due to propagation through the various electronic

components may also differ since electronics may exhibit different responses at different frequencies. The term "gain" is used here to refer to both losses and amplification.

However, since the frequency band of each low-speed channel 240 is known, the gain which the low-speed channel 240 will experience as it propagates through system 100 may be
5 estimated 323 and then compensated for 321 by adjusting the power of each low-speed channel. For example, if sidelobe 350N is expected to experience more loss than sidelobe 350A due to chromatic dispersion, then sidelobe 350N may be amplified with respect to sidelobe 350A in order to compensate for the expected higher loss. The amplification may be applied directly to sidelobe 350N or at other locations within system 100, for example to lobe
10 310N exiting the FDM multiplexer 245 or to the corresponding low-speed channel 240B as it enters the system 100.

The gain may be estimated in any number of ways. For example, with respect to fiber 104, in one embodiment, standard analytical models are used to estimate the gain due to propagation through fiber 104 at different frequencies due to different physical phenomena.
15 Often, these gain estimates will depend on the length of fiber 104, which itself may be estimated based on the expected application. Alternately, the length may be measured, for example by using time-domain reflectometry. In a preferred embodiment, a test signal is sent from node 110A over fiber 104A to node 110B. Node 110B receives the signal and then returns it to node 110A via fiber 104B. A timer circuit measures the round-trip elapsed time,
20 which is used to estimate the fiber length.

Similarly, the gain estimates for fiber 104 may alternately be determined empirically by measuring the actual gain experienced at different frequencies or by using empirical models. Analogous techniques may be applied to the rest of system 100. For example, the gain of electronics may be estimated based on models or may be measured by calibrations,
25 for example performed by the manufacturer at the time of production.

As one example, polarization mode dispersion is one effect which attenuates signals transmitted through a fiber 104. This effect typically results in higher attenuation at higher frequencies. Thus, if all of the sidelobes 350 were of equal power when they entered the fiber 104, the higher frequency sidelobes typically would experience more attenuation. This
5 would result in a rolloff in power received at the receiver 210A at the higher frequencies. Since it is desirable for power for all sidelobes 350 to be roughly equal at the receiver 210A, it is desirable to compensate for this rolloff effect. Accordingly, at the transmitter 210B, the power of the higher frequency low-speed channels 240 is boosted 321 with respect to the lower frequency channels 240 so that after propagation through fiber 104, the sidelobes 350
10 are of roughly equal power when they reach the receiver 210A. In a preferred embodiment, the time-varying nature of the attenuation introduced by polarization mode dispersion is statistically modelled. A specification for worst-case attenuation due to polarization mode dispersion is selected based on the statistical model. In other words, based on the statistical model, there will only be a low probability that at any instant in time the actual attenuation
15 introduced by polarization mode dispersion will be greater than the worst-case attenuation specified in the specification. The power of each low-speed channel 240 is adjusted 321 so that, even if the attenuation is equal to the worst case attenuation, the power at receiver 210A will be sufficient to meet the other performance requirements of system 100.

The gain may also be estimated using closed loop techniques. In other words, the
20 low-speed channel 240 is transmitted across system 100 and a feedback signal is produced responsive to this transmission. The power of the low-speed channel is then adjusted 321 responsive to the feedback signal. As examples, in one embodiment, the feedback signal may depend on the power of the low-speed channel after it has been transmitted across system 100. In another embodiment, it may depend on the signal to noise ratio or various error rates
25 in the received low-speed channel 240A.

In a preferred embodiment, the feedback signal is generated by monitor circuitry coupled to the FDM demultiplexer 225 and fed back from receiver 210A to transmitter 210B

via fiber 104, as opposed to some other communications channel. In system 101 of FIG. 1B, the control systems 290 may communicate with each other via the bidirectional traffic on these fibers 104. For example, consider traffic flow from transmitter 210B(A) across fiber 104A to receiver 210A(B). The feedback signal generated at receiver 210A(B) for this traffic
5 is fed back to transmitter 210B(A) via the other fiber 104B. The control system 290 for node 110A then generates the appropriate control signals to adjust the powers of the low-speed channels. Similarly, the feedback signal for traffic flowing from transmitter 210B(B) across fiber 104B to receiver 210A(A) may be fed back to transmitter 210B(B) via the other fiber 104A.

10 In a preferred embodiment, a frequency band located between the sidebands 350 (see FIG. 3C) and the optical carrier 340 is allocated for control and/or administrative purposes (e.g., for downloading software updates). In a preferred embodiment, this control channel is also used to transmit the feedback signal between the nodes 110 and for time domain reflectometry in order to estimate the length of the fiber. Since it is often desirable to
15 establish initial communications between nodes 110 using the control channel before establishing the actual data links using sidebands 350, the control channel preferably has a lower data rate and is less susceptible to transmission impairments than the data carrying sidebands 350. In an alternate embodiment, one of the frequency bands within the electrical high-speed channel 320 is used for the feedback signal.

20 Any number of techniques may be used to adjust 321 the power of the low-speed channels 240. For example, if a closed loop technique is used, standard control algorithms such as proportional control may be used. In another approach, a common mode and a differential mode adjustment may be used alternately. In the differential mode adjustment, the total power of all low-speed channels is kept constant while the allocation of power
25 among the various channels is adjusted. Thus, for example, the gain applied to sidelobe 350A may be increased by a certain amount if the gain applied to sidelobe 350N is reduced by the same amount, so that the total power in all sidelobes 350 remains constant. In the

common mode adjustment, the allocation of power among the various low-speed channels 240 remains constant while the total power is adjusted. Thus, for example, the gain applied to sidelobes 350A, 350N and all other sidelobes 350 may be increased by the same amount, thus increasing the total power.

5 The use of frequency division multiplexing in system 100 allows the transport of a large number of low-speed channels 240 over a single fiber 104 in a spectrally-efficient manner. It also reduces the cost of system 100 since the bulk of the processing performed by system 100 is performed on low-speed electrical signals. In addition, since each low-speed channel is allocated a specific frequency band, the use of frequency division multiplexing
10 allows different gain to be applied to each low-speed channel in an efficient manner, thus compensating for the specific gain to be experienced by the low-speed channel as it propagates through system 100.

FIGS. 4-8 are more detailed block diagrams illustrating various portions of a preferred embodiment of system 100. Each of these figures includes a part A and a part B, which
15 correspond to the receiver 210A and transmitter 210B, respectively. These figures will be explained by working along the transmitter 210B from the incoming low-speed channels 240B to the outgoing high-speed channel 120, first describing the component in the transmitter 120B (i.e., part B of each figure) and then describing the corresponding components in the 120A (i.e., part A of each figure). These figures are based on the same
20 example as FIG. 3, namely 64 STS-3 data rate low-speed channels 240 are multiplexed into a single optical high-speed channel 120. However, the invention is not to be limited by this example or to the specific structures disclosed.

FIG. 4B is a block diagram of a preferred embodiment of transmitter 210B. In addition to FDM multiplexer 245 and E/O converter 240, this transmitter 210B also includes
25 a low-speed input converter 275 coupled to the FDM multiplexer 245. FDM multiplexer 245 includes a modulator 640, IF up-converter 642, and RF up-converter 644 coupled in series. FIGS. 6B-8B show further details of each of these respective components. Similarly, FIG.

4A is a block diagram of a preferred embodiment of receiver 210A. In addition to O/E converter 220 and FDM demultiplexer 225, this receiver 210A also includes a low-speed output converter 270 coupled to the FDM demultiplexer 225. FDM demultiplexer 225 includes an RF down-converter 624, IF down-converter 622, and demodulator 620 coupled in series, with FIGS. 6A-8A showing the corresponding details.

FIGS. 5A-5B are block diagrams of one type of low-speed converter 270,275. In the transmit direction, low-speed input converter 275 converts tributaries 160B to low-speed channels 240B, which have the same data rate as STS-3 signals in this embodiment. The structure of converter 275 depends on the format of the incoming tributary 160B. For example, if tributary 160B is an STS-3 signal then no conversion is required. If it is an OC-3 signal, then converter 275 will perform an optical to electrical conversion.

FIG. 5B is a converter 275 for an OC-12 tributary. Converter 275 includes an O/E converter 510, CDR 512, TDM demultiplexer 514, and parallel to serial converter 516 coupled in series. The O/E converter 510 converts the incoming OC-12 tributary 160B from optical to electrical form, producing the corresponding STS-12 signal. CDR 512 performs clock and data recovery of the STS-12 signal and also determines framing for the signal. CDR 512 also converts the incoming bit stream into a byte stream. The output of CDR 512 is byte-wide, as indicated by the "x8." Demultiplexer 514 receives the signal from CDR 512 one byte at a time and byte demultiplexes the recovered STS-12 signal using time division demultiplexing (TDM) techniques. The result is four separate byte-wide signals, as indicated by the "4x8," each of which is equivalent in data rate to an STS-3 signal and with the corresponding framing. Converter 516 also converts each byte-wide signal into a serial signal at eight times the data rate, with the resulting output being four low-speed channels 240B, each at a data rate of 155 Mbps.

Low-speed input converter 270 of FIG. 5A implements the reverse functionality of converter 275, converting four 155 Mbps low-speed channels 240A into a single outgoing OC-12 tributary 160A. In particular, converter 270 includes CDR 528, FIFO 526, TDM

multiplexer 524, parallel to serial converter 522, and E/O converter 520 coupled in series. CDR 528 performs clock and data recovery of each of the four incoming low-speed channels 240A, determines framing for the channels, and converts the channels from serial to byte-wide parallel. The result is four byte-wide signals entering FIFO 526. FIFO 526 is a buffer
5 which is used to synchronize the four signals in preparation for combining them into a single STS-12 signal. Multiplexer 524 performs the actual combination using TDM, on a byte level, to produce a single byte-wide signal equivalent in data capacity to an STS-12 signal. Parallel to serial converter 522 adds STS-12 framing to complete the STS-12 signal and converts the signal from byte-wide parallel to serial. E/O converter converts the STS-12
10 signal to electrical form, producing the outgoing OC-12 tributary 160A.

Converters 270 and 275 have been described in the context of OC-3 and OC-12 tributaries and low-speed channels with the same data rate as STS-3 signals, but the invention is not limited to these protocols. Alternate embodiments can vary the number, bit rate, format, and protocol of some or all of these tributaries 160. One advantage of the FDM
15 approach illustrated in system 100 is that the system architecture is generally independent of these parameters. For example, the tributaries 160 can comprise four 2.5 Gbps data streams, 16 622 Mbps data streams, 64 155 Mbps data streams, 192 51.84 Mbps data streams, or any other bit rate or combinations of bit rates, without requiring major changes to the architecture of system 100.

20 In one embodiment, the tributaries 160 are at data rates which are not multiples of the STS-3 data rate. In one variant, low-speed input converter 275 demultiplexes the incoming tributary 160B into some number of parallel data streams and then stuffs null data into each resulting stream such that each stream has an STS-3 data rate. For example, if tributary 160B has a data rate of 300 Mbps, converter 275 may demultiplex the tributary into four 75 Mbps
25 streams. Each stream is then stuffed with null data to give four 155 Mbps low-speed channels. In another variant, the speed of the rest of system 100 (specifically the modulator 640 and demodulator 620 of FIG. 4) may be adjusted to match that of the tributary 160.

Low-speed output converter 270 typically will reverse the functionality of low-speed input converter 275.

Referring to FIG. 6B, modulator 640 modulates the 64 incoming low-speed channels 240B to produce 64 QAM-modulated channels which are input to the IF up-converter 642.

5 For convenience, the QAM-modulated channels shall be referred to as IF channels because they are inputs to the IF up-converter 642. In this embodiment, each low-speed channel 240 is modulated separately to produce a single IF channel and FIG. 6B depicts the portion of modulator 640 which modulates one IF channel. Modulator 640 in its entirety would include 64 of the portions shown in FIG. 6B. For convenience, the single channel shown in FIG. 6B
10 shall also be referred to as a modulator 640. Modulator 640 includes a FIFO 701, Reed-Solomon encoder 702, an interleaver 704, a trellis encoder 706, a digital filter 708 and a D/A converter 710 coupled in series. Modulator 640 also includes a synchronizer 712 coupled between the incoming low-speed channel 240B and the filter 708.

Modulator 640 operates as follows. FIFO 701 buffers the incoming low-speed
15 channel. Reed-Solomon encoder 702 encodes the low-speed channel 240B according to a Reed-Solomon code. Programmable Reed-Solomon codes are preferred for maintaining very low BER (typ. lower than 10^{-12}) with low overhead (typ. less than 10%). This is particularly relevant for optical fiber systems because they generally require low bit error rates (BER) and any slight increase of the interference or noise level will cause the BER to exceed the
20 acceptable threshold. For example, a Reed-Solomon code of (204,188) can be applied for an error correction capability of 8 error bytes per every 204 encoded bytes.

The interleaver 704 interleaves the digital data string output by the Reed-Solomon encoder 702. The interleaving results in more robust error recovery due to the nature of trellis encoder 706. Specifically, forward error correction (FEC) codes are able to correct
25 only a limited number of mistakes in a given block of data, but convolutional encoders such as trellis encoder 706 and the corresponding decoders tend to cause errors to cluster together. Hence, without interleaving, a block of data which contained a large cluster of errors would

be difficult to recover. However, with interleaving, the cluster of errors is distributed over several blocks of data, each of which may be recovered by use of the FEC code. Convolution interleaving of depth 0 is preferred in order to minimize latency.

The trellis encoder 706 applies a QAM modulation, preferably 16 state QAM modulation, to the digital data stream output by the interleaver 704. The result typically is a complex baseband signal, representing the in-phase and quadrature (I and Q) components of a QAM-modulated signal. Trellis encoder 706 implements the QAM modulation digitally and the resulting QAM modulated signal is digitally filtered by filter 708 in order to reduce unwanted sidelobes and then converted to the analog domain by D/A converter 710.

10 Synchronizer 712 performs clock recovery on the incoming low-speed channel 240B in order to synchronize the digital filter 708. The resulting IF channel is a pair of differential signals, representing the I and Q components of the QAM-modulated signal. In alternate embodiments, the QAM modulation may be implemented using analog techniques.

Referring to FIG. 6A, demodulator 620 reverses the functionality of modulator 640, recovering a low-speed channel 240A from an incoming IF channel (i.e., analog I and Q components in this embodiment) received from the IF down-converter 622. Demodulator 620 includes an A/D converter 720, digital Nyquist filter 722, equalizer 724, trellis decoder 726, deinterleaver 728, Reed-Solomon decoder 730 and FIFO 732 coupled in series.

Demodulator 620 further includes a synchronizer 734 which forms a loop with Nyquist filter 722 and a rate converter phase-locked loop (PLL) 736 which is coupled between

20 synchronizer 734 and FIFO 732.

Demodulator 620 operates as FIG. 6A would suggest. The A/D converter 720 converts the incoming IF channel to digital form and Nyquist filter 722, synchronized by synchronizer 734, digitally filters the result to reduce unwanted artifacts from the conversion.

25 Equalizer 724 applies equalization to the filtered result, for example to compensate for distortions introduced in the IF signal processing. Trellis decoder 726 converts the I and Q complex signals to a digital stream and deinterleaver 728 reverses the interleaving process.

Trellis decoder 726 may also determine the error rate in the decoding process, commonly referred to as the channel error rate, which may then be used to estimate the gain of system 100 as described previously. Reed-Solomon decoder 730 reverses the Reed-Solomon encoding, correcting any errors which have occurred. If the code rate used results in a data
5 rate which does not match the rate used by the low-speed channels, FIFO 732 and rate converter PLL 736 transform this rate to the proper data rate.

Referring again to transmitter 210B, IF up-converter 642 receives the 64 IF channels from modulator 640. Together, IF up-converter 642 and RF up-converter 644 combine these 64 IF channels into a single RF signal using FDM techniques. In essence, each of the IF
10 channels (or equivalently, each of the 64 low-speed channels 240B) is allocated a different frequency band within the RF signal. The allocation of frequency bands shall be referred to as the frequency mapping, and, in this embodiment, the IF channels may also be referred to as FDM channels since they are the channels which are FDM multiplexed together. The multiplexing is accomplished in two stages. IF up-converter 642 first combines the 64 IF
15 channels into 8 RF channels, so termed because they are inputs to the RF up-converter 644. In general, the terms "IF" and "RF" are used throughout as labels rather than, for example, indicating some specific frequency range. RF up-converter 644 then combines the 8 RF channels into the single RF signal, also referred to as the electrical high-speed channel.

Referring to FIG. 7B, IF up-converter 642 includes eight stages (identical in this
20 embodiment, but not necessarily so), each of which combines 8 IF channels into a single RF channel. FIG. 7B depicts one of these stages, which for convenience shall be referred to as an IF up-converter 642. IF up-converter 642 includes eight frequency shifters and a combiner 812. Each frequency shifter includes a modulator 804, a variable gain block 806, a filter 808, and a power monitor 810 coupled in series to an input of the combiner 812.

25 IF up-converter 642 operates as follows. Modulator 804 receives the IF channel and also receives a carrier at a specific IF frequency (e.g., 1404 MHz for the top frequency shifter in FIG. 7B). Modulator 804 modulates the carrier by the IF channel. The modulated carrier

is adjusted in amplitude by variable gain block 806, which is controlled by the corresponding control system 290, and bandpass filtered by filter 808. Power monitor 810 monitors the power of the gain-adjusted and filtered signal, and transmits the power measurements to control system 290.

5 In a preferred embodiment, each IF channel has a target power level based on the estimated gain due to transmission through system 100. Control system 290 adjusts the gain applied by variable gain block 806 so that the actual power level, as measured by power monitor 810, matches the target power level. The target power level may be determined in any number of ways. For example, the actual power level may be required to fall within a
10 certain power range or be required to always stay above a minimum acceptable power. Alternately, it may be selected to maintain a minimum channel error rate or to maintain a channel error rate within a certain range. In this embodiment, variable gain block 806 implements the step of adjusting 321 the power of each low-speed channel 240.

In alternate embodiments, the power adjustment may be implemented by other
15 elements at other locations or even at more than one location. For example, one gain block may apply a common mode gain to all low-speed channels, and another series of gain blocks at a different location may apply individual gain to each channel (i.e., differential mode gain). However, applying the gain adjustment at the location of variable gain block 806 has some advantages. For example, if the power were adjusted prior to modulator 804, where each
20 low-speed channel consists of an I and a Q channel, care would need to be taken to ensure that the same gain was applied to both the I and Q channels in order to prevent distortion of the signal. Alternately, if the power were adjusted after combiner 812, it typically would be more difficult to adjust the power of each individual low-speed channel since combiner 812 produces a composite signal which includes multiple individual channels.

25 The inputs to combiner 812 are QAM-modulated IF signal at a specific frequency which have been power-adjusted to compensate for estimated gains in the rest of system 100. However, each frequency shifter uses a different frequency (e.g., ranging in equal increments

from 900 MHz to 1404 MHz in this example) so combiner 812 simply combines the 8 incoming QAM-modulated signal to produce a single signal (i.e., the RF channel) containing the information of all 8 incoming IF channels. In this example, the resulting RF channel covers the frequency range of 864-1440 MHz.

5 Referring to FIG. 8B, RF up-converter 644 is structured similar to IF up-converter 642 and performs a similar function combining the 8 RF channels received from the IF up-converter 642 just as each IF up-converter combines the 8 IF channels received by it. In more detail, RF up-converter 644 includes eight frequency shifters and a combiner 912. Each frequency shifter includes a mixer 904, various gain blocks 906, and various filter 908
10 coupled in series to an input of the combiner 912.

RF up-converter 644 operate as follows. Mixer 904 mixes one of the RF channels with a carrier at a specific RF frequency (e.g., 4032 MHz for the top frequency shifter in FIG. 8B), thus frequency upshifting the RF channel to RF frequencies. Gain blocks 906 and filters 908 are used to implement standard amplitude adjustment and frequency filtering. For
15 example, in FIG. 8B, one filter 908 bandpass filters the incoming RF channel and another bandpass filters the produced RF signal, both filters for suppressing artifacts outside the frequency range of interest. Each frequency shifter uses a different frequency (e.g., ranging in equal increments from 0 to 4032 MHz in this example) so combiner 912 simply combines the 8 incoming RF signals to produce the single electrical high-speed channel containing the
20 information of all 8 incoming RF channels or, equivalently, all 64 IF channels received by IF up-converter 642. In this example, the electrical high-speed channel covers the frequency range of 864-5472 MHz.

RF down-converter 624 and IF down-converter 622 implement the reverse functionalities, splitting the RF signal into its 8 constituent RF channels and then splitting
25 each RF channel into its 8 constituent IF channels, respectively, thus producing 64 IF channels (i.e., FDM channels) to be received by demodulator 620.

Referring to FIG. 8A, RF down-converter 624 includes a splitter 920 coupled to eight frequency shifters. Each frequency shifter includes a mixer 924, various gain blocks 926, and various filters 928 coupled in series. Splitter 920 splits the incoming electrical high-speed channel into eight different RF signals and each frequency shifter recovers a different constituent RF channel from the RF signal it receives. Mixer 924 mixes the received RF signal with a carrier at a specific RF frequency (e.g., 4032 MHz for the top frequency shifter in FIG. 8A), thus frequency downshifting the RF signal to its original IF range (e.g., 864-1440 MHz). Filter 928 then filters out this specific IF frequency range. Each frequency shifter uses a different RF frequency with mixer 924 and thus recovers a different RF channel. The output of RF down-converter 624 is the 8 constituent RF channels.

IF down-converter 622 of FIG. 7A operates similarly. It includes a splitter 820 and 8 frequency shifters, each including a bandpass filter 822, variable gain block 823, demodulator 824, and power monitor 826. Splitter 820 splits the incoming RF channel into eight signals, from which each frequency shifter will recover a different constituent IF channel. Filter 822 isolates the frequency band within the RF channel which contains the IF channels of interest. Demodulator 824 recovers the IF channel by mixing with the corresponding IF carrier. The resulting 64 IF channels are input to demodulator 620.

Variable gain block 823 and power monitor 826 control the power level of the resulting IF channel. In a preferred embodiment, each IF channel is output from IF down-converter 622 at a target power in order to enhance performance of the rest of the receiver 210A. Power monitor 826 measures the actual power of the IF channel, which is used to adjust the gain applied by variable gain block 823 in order to match the actual and target power levels. As described previously, the actual received power level for each low-speed channel may be used to estimate the gain of system 100. In IF down-converter 622, the actual receive power level may be determined by dividing the output target power for each IF channel by the gain applied by variable gain block 823 in order to maintain the output target

power. In another approach, the actual receive power level may be directly measured, for example by placing a power monitor where variable gain block 823 is located.

A preferred embodiment of method 300 will now be described, with reference to the bidirectional system 101 and the further details given in FIGS. 5-8. In the preferred method, the gain applied to each low-speed channel 240 is adjusted in order to optimize the channel error rate measured at the receiver 210A. Feedback occurs over fibers 104. More specifically, gain is applied to each of the low-speed channels 240 via variable gain block 806. This gain is initially selected based on an open-loop estimate. As data is transmitted from transmitter 210B(A) over fiber 104A to receiver 210A(B), trellis decoder 726 determines the channel error rate at the receiver 210A(B). The channel error rate is fed back to node 110A via the control channel on fiber 104B. In this embodiment, the control channel is a frequency modulated, alternate mark inverted, B8ZS-encoded baseband transmitted at 2 Mbps. The gain applied by variable gain block 806 is adjusted to optimize this channel error rate. One optimization approach alternates between differential mode and common mode adjustments. In the differential mode adjustment, the gain is increased for low-speed channels 240 which have unacceptable channel error rates and decreased for low-speed channels 240 with acceptable channel error rates, while keeping the overall power in all low-speed channels constant. In the common mode adjustment, if the median channel error rate is unacceptable, then the gain for all channels 240 is increased by equal increments until the median channel error rate is acceptable. In alternate embodiments, channel performance can be monitored by metrics other than the channel error rate, for example, received power, signal to noise ratio, or bit error rate.

It should be noted that many other implementations which achieve the same functionality as the devices in FIGS. 5-8 will be apparent. For example, referring to FIG. 8B, note that the bottom channel occupies the frequency spectrum from 864-1440 MHz and, therefore, no mixer 904 is required. As another example, note that the next to bottom channel is frequency up shifted from the 864-1440 MHz band to the 1440-2016 MHz. In a preferred

approach, this is not accomplished in a single step by mixing with a 576 MHz signal. Rather, the incoming 864-1440 MHz signal is frequency up shifted to a much higher frequency range and then frequency down shifted back to the 1440-2016 MHz range. This avoids unwanted interference from the 1440 MHz end of the original 864-1440 MHz signal. For example, referring to FIG. 7B, in a preferred embodiment, the filters 808 are not required due to the good spectral characteristics of the signals at that point. A similar situation may apply to the other filters shown throughout, or the filtering may be achieved by different filters and/or filters placed in different locations. Similarly, amplification may be achieved by devices other than the various gain blocks shown. In a preferred embodiment, both RF down-converter 624 and RF up-converter 644 do not contain variable gain elements. As one final example, in FIGS. 4-8, some functionality is implemented in the digital domain while other functionality is implemented in the analog domain. This apportionment between digital and analog may be different for other implementations. Other variations will be apparent.

The FDM aspect of preferred embodiment 400 has been described in the context of combining 64 low-speed channels 240 into a single optical high-speed channel 120. The invention is in no way limited by this example. Different total numbers of channels, different data rates for each channel, different aggregate data rate, and formats and protocols other than the STS/OC protocol are all suitable for the current invention. In fact, one advantage of the FDM approach is that it is easier to accommodate low-speed channels which use different data rates and/or different protocols. In other words, some of the channels 240B may use data rate A and protocol X; while others may use data rate B and protocol Y, while yet others may use data rate C and protocol Z. In the FDM approach, each of these may be allocated to a different carrier frequency and they can be straightforwardly combined so long as the underlying channels are not so wide as to cause the different carriers to overlap. In contrast, in the TDM approach, each channel is allocated certain time slots and, essentially, will have to be converted to a TDM signal before being combined with the other channels.

Another advantage is lower cost. The FDM operations may be accomplished with low-cost components commonly found in RF communication systems. Additional cost savings are realized since the digital electronics such as modulator 640 and demodulator 620 operate at a relatively low data rate compared to the aggregate data rate. The digital
5 electronics need only operate as fast as the data rate of the individual low-speed channels 240. This is in contrast to TDM systems, which require a digital clock rate that equals the aggregate transmission rate. For OC-192, which is the data rate equivalent to the high-speed channels 120 in system 100, this usually requires the use of relatively expensive gallium arsenide integrated circuits instead of silicon.

10 Moving further along transmitter 210B, E/O converter 240 preferably includes an optical source and an external optical modulator. Examples of optical sources include solid state lasers and semiconductor lasers. Example external optical modulators include Mach Zehnder modulators and electro-absorptive modulators. The optical source produces an optical carrier, which is modulated by the electrical high-speed channel as the carrier passes
15 through the modulator. The electrical high-speed channel may be predistorted in order to increase the linearity of the overall system. Alternatively, E/O converter 240 may be an internally modulated laser. In this case, the electrical high-speed channel drives the laser, the output of which will be a modulated optical beam (i.e., the optical high-speed channel 120B).

The wavelength of the optical high-speed channel may be controlled using a number
20 of different techniques. For example, a small portion of the optical carrier may be extracted by a fiber optic splitter, which diverts the signal to a wavelength locker. The wavelength locker generates an error signal when the wavelength of the optical carrier deviates from the desired wavelength. The error signal is used as feedback to adjust the optical source (e.g., adjusting the drive current or the temperature of a laser) in order to lock the optical carrier at
25 the desired wavelength. Other approaches will be apparent.

The counterpart on the receiver 210A is O/E converter 220, which typically includes a detector such as an avalanche photo-diode or PIN-diode. In an alternate approach, O/E

converter 220 includes a heterodyne detector. For example, the heterodyne detector may include a local oscillator laser operating at or near the wavelength of the incoming optical high-speed channel 120A. The incoming optical high-speed channel and the output of the local oscillator laser are combined and the resulting signal is detected by a photodetector.

- 5 The information in the incoming optical high-speed channel can be recovered from the output of the photodetector. One advantage of heterodyne detection is that the thermal noise of the detector can be overcome and shot noise limited performance can be obtained without the use of fiber amplifiers.

- The modularity of the FDM approach also makes the overall system more flexible and
10 scaleable. For example, frequency bands may be allocated to compensate for fiber characteristics. For a 70 km fiber, there is typically a null around 7 GHz. With the FDM approach, this null may be avoided simply by not allocating any of the frequency bands around this null to any low-speed channel 240. As a variant, each of the frequency bands may be amplified or attenuated independently of the others, for example in order to
15 compensate for the transmission characteristics of that particular frequency band.

- Various design tradeoffs are inherent in the design of a specific embodiment of an FDM-based system 100 for use in a particular application. For example, the type of Reed Solomon encoding may be varied or other types of forward error correction codes (or none at all) may be used, depending on the system margin requirements. As another example, in one
20 variation of QAM, the signal lattice is evenly spaced in complex signal space but the total number of states in the QAM constellation is a design parameter which may be varied. The optimal choices of number of states and other design parameters for modulator/demodulator 640/620 will depend on the particular application. Furthermore, the modulation may differ on some or all of the low speed channels. For example, some of the channels may use PSK
25 modulation, others may use 16-QAM, others may use 4-QAM, while still others may use an arbitrary complex constellation. The choice of a specific FDM implementation also involves a number of design tradeoffs, such as the choices of intermediate frequencies, whether to

implement components in the digital or in the analog domain, and whether to use multiple stages to achieve the multiplexing.

As a numerical example, in one embodiment, a (187,204) Reed-Solomon encoding may be used with a rate 3/4 16-QAM trellis code. The (187,204) Reed-Solomon encoding transforms 187 bytes of data into 204 bytes of encoded data and the rate 3/4 16-QAM trellis code transforms 3 bits of information into a single 16-QAM symbol. In this example, a single low-speed channel 240B, which has a base data rate of 155 Mbps would require a symbol rate of $155 \text{ Mbps} \times (204/187) \times (1/3) = 56.6 \text{ Megasymbols per second}$. Including an adequate guard band, a typical frequency band would be about 72 MHz to support this symbol rate. Suppose, however, that it is desired to decrease the bandwidth of each frequency band. This could be accomplished by changing the encoding and modulation. For example, a (188,205) Reed-Solomon code with a rate 5/6 64-QAM trellis code would require a symbol rate of $155 \text{ Mbps} \times (205/188) \times (1/5) = 33.9 \text{ Megasymbols per second}$ or 43 MHz frequency bands, assuming proportional guard bands. Alternately, if 72 MHz frequency bands were retained, then the data rate could be increased.

As another example, an optical modulator 240 with better linearity will reduce unwanted harmonics and interference, thus increasing the transmission range of system 100. However, optical modulators with better linearity are also more difficult to design and to produce. Hence, the optimal linearity will depend on the particular application. An example of a system-level tradeoff is the allocation of signal power and gain between the various components. Accordingly, many aspects of the invention have been described in the context of the preferred embodiment of FIGS. 3-8 but it should be understood that the invention is not to be limited by this specific embodiment.

It should be noted that the embodiments described above are exemplary only and many other alternatives will be apparent. For example, in the embodiments discussed above, the low-speed channels 240 were combined into an electrical high-speed channel using solely frequency division multiplexing. For example, each of the 64 low-speed channels 240B was

effectively placed on a carrier of a different frequency and these 64 carriers were then effectively combined into a single electrical high-speed channel solely on the basis of different carrier frequencies. This is not meant to imply that the invention is limited solely to frequency division multiplexing to the exclusion of all other approaches for combining
5 signals. In fact, in alternate embodiments, other approaches may be used in conjunction with frequency division multiplexing. For example, in one approach, 64 low-speed channels 240B may be combined into a single high-speed channel 120 in two stages, only the second of which is based on frequency division multiplexing. In particular, 64 low-speed channels 240B are divided into 16 groups of 4 channels each. Within each group, the 4 channels are
10 combined into a single signal using 16-QAM (quadrature amplitude modulation). The resulting QAM-modulated signals are frequency-division multiplexed to form the electrical high-speed channel.

As another example, it should be clear that the tributaries 160 may themselves be combinations of signals. For example, some or all of the OC-3/OC-12 tributaries 160 may be
15 the result of combining several lower data rate signals, using either frequency division multiplexing or other techniques. In one approach, time division multiplexing may be used to combine several lower data rate signals into a single OC-3 signal, which serves as a tributary 160.

As a final example, frequency division multiplexing has been used in all of the
20 preceding examples as the method for combining the low-speed channels 240 into a high-speed channel 120 for transmission across optical fiber 104. Other approaches could also be used. For example, the low-speed channels 240 could be combined using wavelength division multiplexing, in which the combining of channels occurs in the optical domain rather than in the electrical domain. In this approach, the low-speed channels are optical in form,
25 the optical power of each low-speed channel is adjusted, and the power-adjusted optical low-speed channels are combined using wavelength division multiplexing rather than frequency division multiplexing. Many of the principles described above may also be applied to the

wavelength division multiplexing approach. Although the invention has been described in considerable detail with reference to certain preferred embodiments thereof, other embodiments are possible. Therefore, the scope of the appended claims should not be limited to the description of the preferred embodiments contained herein.

1 WHAT IS CLAIMED IS:

1 1. In an optical fiber communications system, a method for compensating for frequency-
2 dependent gain effects in the communications system, the method comprising:

3 receiving at least two low-speed channels, each low-speed channel allocated a
4 different frequency band of an optical fiber communications system for
5 transmission across the communications system;

6 estimating a gain of the communications system for the frequency band allocated to
7 each of the low-speed channels; and

8 adjusting a power of each low-speed channel to compensate for the estimated gain of
9 the communications system.

1 2. The method of claim 1 further comprising:

2 frequency division multiplexing the power-adjusted low-speed channels to produce an
3 electrical high-speed channel for transmission across the communications
4 system.

1 3. The method of claim 2 wherein at least one low-speed channel is derived from an STS
2 signal.

1 4. The method of claim 2 wherein at least one low-speed channel is derived using a
2 quadrature-amplitude modulation.

1 5. The method of claim 2 wherein at least two low-speed channels are derived from
2 signals characterized by at least two different data rates.

1 6. The method of claim 2 wherein at least two low-speed channels are derived from
2 signals characterized by at least two different communications protocols.

1 7. The method of claim 2 wherein:

2 the communications system includes an optical fiber; and

3 the step of estimating a gain of the communications system comprises estimating a
4 gain for propagation through the optical fiber for the frequency band allocated
5 to the low-speed channel.

1 8. The method of claim 7 wherein the step of estimating a gain for propagation through
2 the optical fiber comprises estimating a gain due to chromatic dispersion for the frequency
3 band allocated to the low-speed channel.

1 9. The method of claim 7 wherein the step of estimating a gain for propagation through
2 the optical fiber comprises estimating a gain due to polarization mode dispersion for the
3 frequency band allocated to the low-speed channel.

1 10. The method of claim 7 wherein the step of estimating a gain for propagation through
2 the optical fiber comprises:

3 estimating a length of the optical fiber using time-domain reflectometry; and
4 estimating a gain for propagation through the optical fiber of the estimated length.

1 11. The method of claim 2 wherein
2 the communications system includes electronics; and
3 the step of estimating a gain of the communications system comprises estimating a
4 gain for propagation through the electronics.

1 12. The method of claim 2 wherein:
2 the step of estimating a gain of the communications system comprises receiving a
3 feedback signal responsive to the low-speed channel after it has been
4 transmitted across the optical fiber communications system; and
5 the step of adjusting the power of the low-speed channel is responsive to the feedback
6 signal.

- 1 13. The method of claim 12 wherein the feedback signal is responsive to a channel error
2 rate for the low-speed channel after it has been transmitted across the optical fiber
3 communications system.
- 1 14. The method of claim 12 wherein the feedback signal is responsive to a signal to noise
2 ratio for the low-speed channel after it has been transmitted across the optical fiber
3 communications system.
- 1 15. The method of claim 2 wherein the step of adjusting the power of each low-speed
2 channel comprises:
3 adjusting a total power of all of the low-speed channels while keeping an allocation of
4 the total power among the low-speed channels constant; and
5 adjusting the allocation of the total power among the low-speed channels while
6 keeping the total power constant.
- 1 16. An optical fiber communications system for transmitting at least two low-speed
2 channels across the communications system, the communications system comprising:
3 a variable gain block for adjusting a power of each low-speed channel to compensate
4 for an estimated gain of the communications system for a frequency band
5 allocated to the low-speed channel; and
6 a FDM multiplexer coupled to the variable gain block for combining the power-
7 adjusted low-speed channels into an electrical high-speed channel suitable for
8 transmission across the communications system.
- 1 17. The communications system of claim 16 further comprising:
2 receive circuitry coupled to the variable gain block for receiving an STS signal,
3 wherein at least one low-speed channel is derived from the STS signal.

- 1 18. The communications system of claim 16 further comprising:
2 a quadrature-amplitude modulator coupled to the variable gain block for applying a
3 quadrature-amplitude modulation to at least one of the low-speed channels.
- 1 19. The communications system of claim 16 further comprising:
2 first receive circuitry coupled to the variable gain block for receiving a first signal
3 characterized by a first data rate, wherein at least one low-speed channel is
4 derived from the first signal; and
5 second receive circuitry coupled to the variable gain block for receiving a second
6 signal characterized by a second data rate different from the first data rate,
7 wherein at least one low-speed channel is derived from the second signal.
- 1 20. The communications system of claim 16 further comprising:
2 first receive circuitry coupled to the variable gain block for receiving a first signal
3 characterized by a first communications protocol, wherein at least one low-
4 speed channel is derived from the first signal; and
5 second receive circuitry coupled to the variable gain block for receiving a second
6 signal characterized by a second communications protocol different from the
7 first communications protocol, wherein at least one low-speed channel is
8 derived from the second signal.
- 1 21. The communications system of claim 16 wherein the estimated gain of the
2 communications system comprises a gain for propagation through an optical fiber for the
3 frequency band allocated to the low-speed channel.
- 1 22. The communications system of claim 21 wherein the gain for propagation through the
2 optical fiber comprises a gain due to chromatic dispersion for the frequency band allocated to
3 the low-speed channel.

1 23. The communications system of claim 21 wherein the gain for propagation through the
2 optical fiber comprises a gain due to polarization mode dispersion for the frequency band
3 allocated to the low-speed channel.

1 24. The communications system of claim 21 further comprising:
2 a time-domain reflectometer for estimating a length of the optical fiber, wherein the
3 gain for propagation through the optical fiber includes a gain for propagation
4 through the optical fiber of the estimated length.

1 25. The communications system of claim 16 wherein the estimated gain of the
2 communications system comprises a gain for propagation through electronics.

1 26. The communications system of claim 16 further comprising:
2 a control system coupled to the variable gain block for receiving a feedback signal
3 responsive to the low-speed channel after it has been transmitted across the
4 optical fiber communications system and further for adjusting the variable
5 gain block responsive to the feedback signal.

1 27. The communications system of claim 26 wherein the feedback signal is responsive to
2 a channel error rate for the low-speed channel after it has been transmitted across the optical
3 fiber communications system.

1 28. The communications system of claim 27 further comprising:
2 a forward error correction encoder coupled to the variable gain block for applying a
3 forward error correction code to the low-speed channels, wherein the channel
4 error rate includes a number of errors detected according to the forward error
5 correction code.

1 29. The communications system of claim 26 wherein the feedback signal is responsive to
2 a signal to noise ratio for the low-speed channel after it has been transmitted across the
3 optical fiber communications system.

1 30. The communications system of claim 26 wherein the feedback signal is responsive to
2 a power of the low-speed channel after it has been transmitted across the optical fiber
3 communications system.

1 31. The communications system of claim 16 further comprising:
2 a control system coupled to the variable gain block for adjusting the variable gain
3 block responsive to a feedback signal;
4 an E/O converter coupled to the FDM multiplexer for converting the electrical high-
5 speed channel to an optical high-speed channel;
6 an optical fiber coupled to the E/O converter for transporting the optical high-speed
7 channel across the optical fiber communications system;
8 an O/E converter coupled to the optical fiber for converting the optical high-speed
9 channel to the electrical high-speed channel;
10 a FDM demultiplexer coupled to the O/E converter for frequency division
11 demultiplexing the electrical high-speed channel into the low-speed channels;
12 and
13 monitor circuitry coupled to the FDM demultiplexer for generating the feedback
14 signal responsive to the frequency division demultiplexed low-speed channels.

1 32. The communications system of claim 31 further comprising:
2 a forward error correction encoder coupled to the variable gain block for applying a
3 forward error correction code to the low-speed channels;
4 wherein the monitor circuitry includes a forward error correction decoder for
5 determining a number of errors according to the forward error correction code
6 and generating the feedback signal responsive to the number of errors.

1 33. The communications system of claim 31 wherein the monitor circuitry includes a
2 power monitor for monitoring the power of each low-speed channel and generating the
3 feedback signal responsive to the measured power.

- 1 34. The communications system of claim 16 wherein the variable gain block comprises:
2 a common mode gain block and a differential mode gain block coupled in series, the
3 common mode gain block for adjusting a total power of all of the low-speed
4 channels while keeping an allocation of the total power among the low-speed
5 channels constant, and the differential mode gain block for adjusting the
6 allocation of the total power among the low-speed channels while keeping the
7 total power constant.
- 1 35. The communications system of claim 16 wherein, for each low-speed channel, the
2 variable gain block comprises:
3 a variable gain element for adjusting a power of each low-speed channel according to
4 a control signal; and
5 a power monitor coupled to the variable gain element for monitoring the power of
6 each low-speed channel and generating the control signal to maintain the
7 power at a desired level.

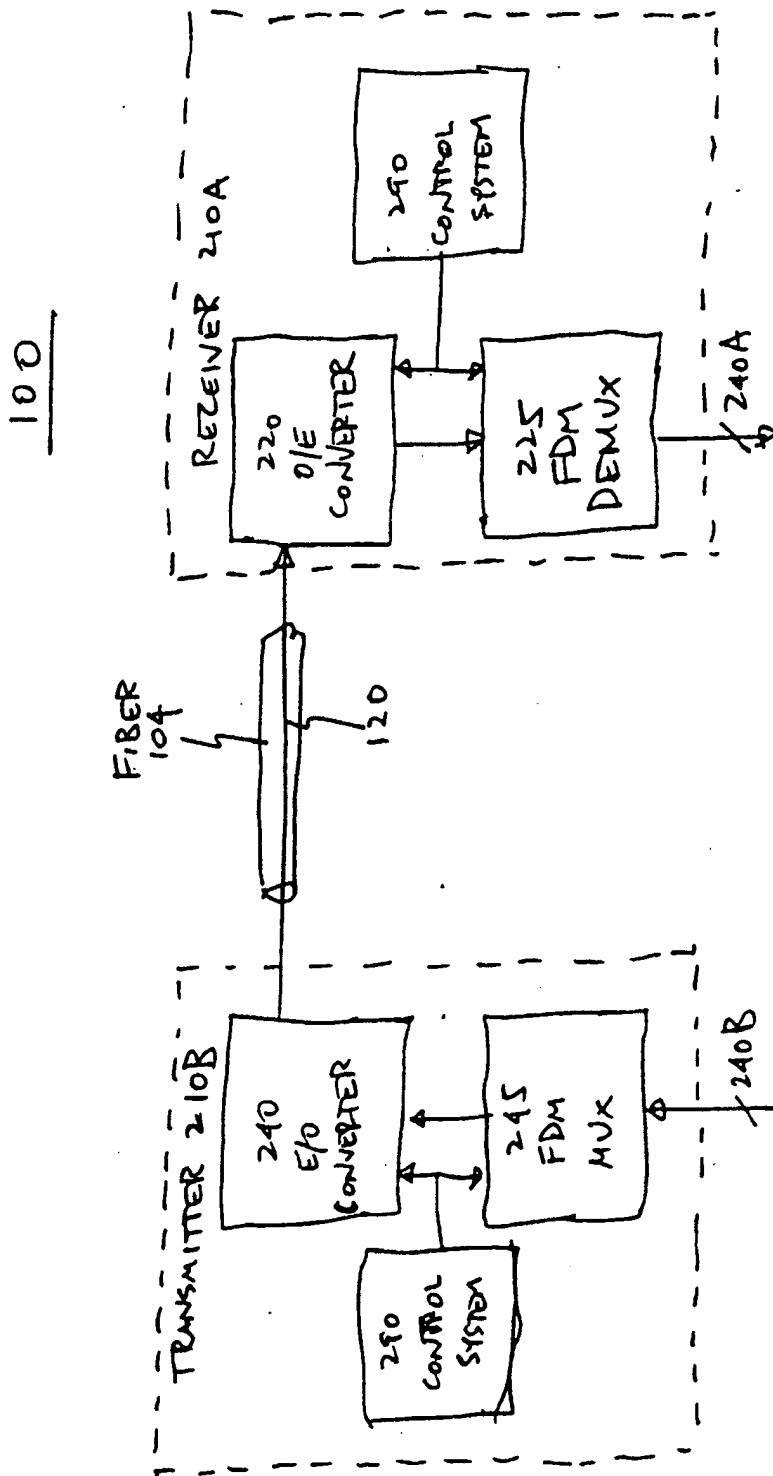


FIG. 1A

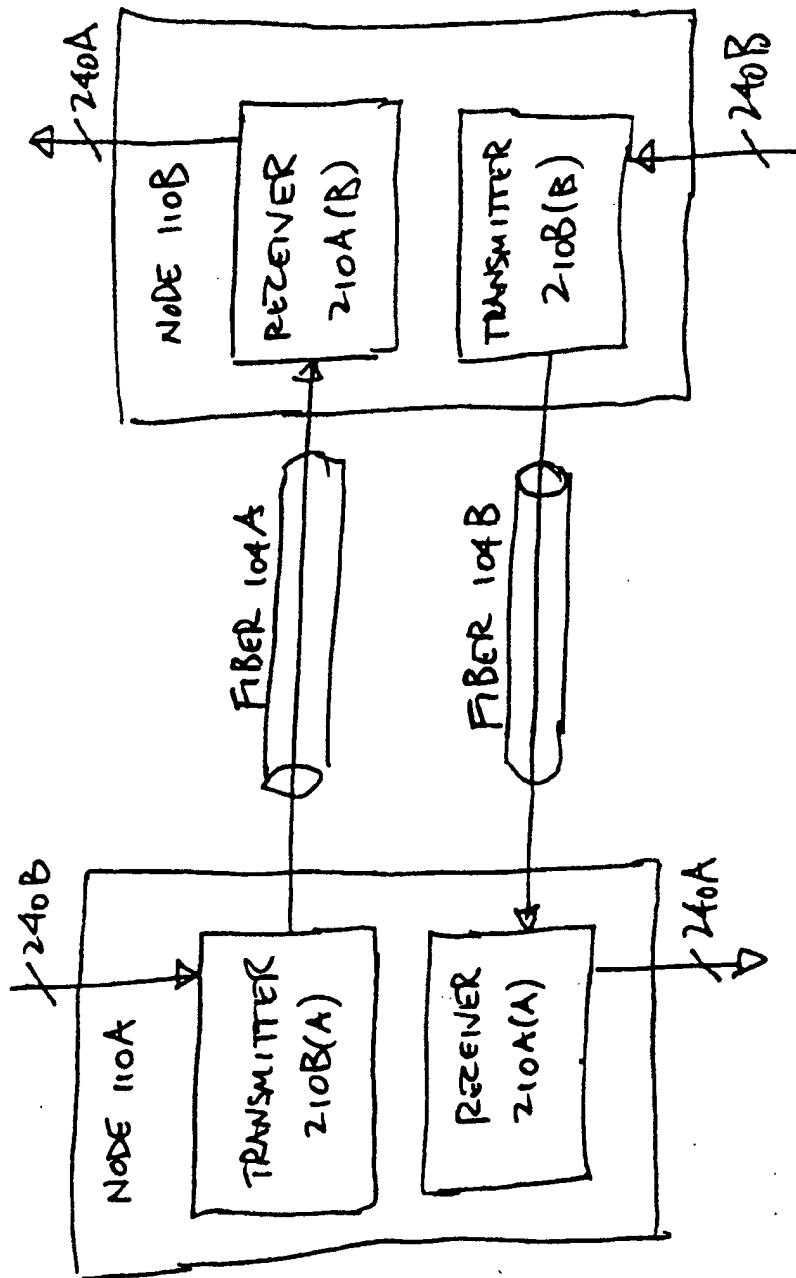


FIG. 1B

101

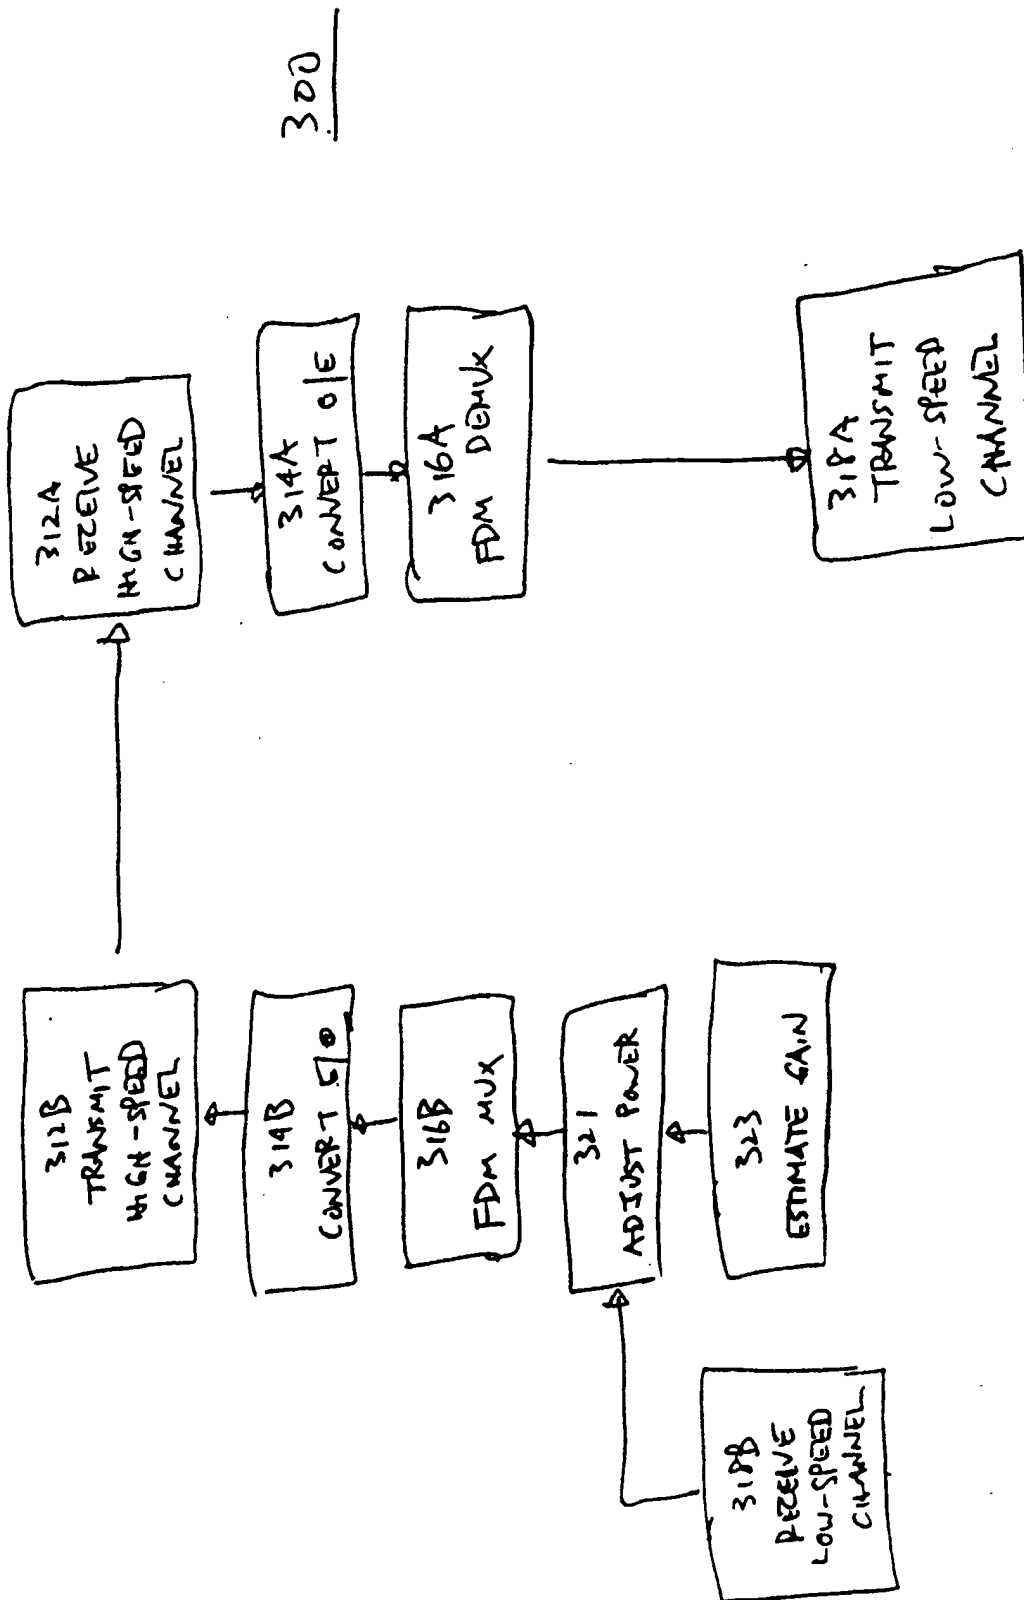


FIG. 2

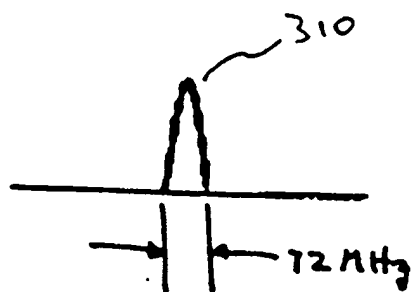


FIG. 3A

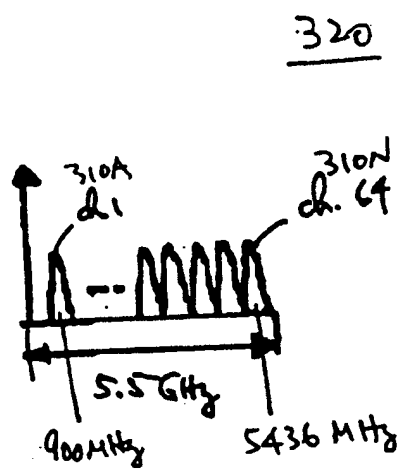


FIG. 3B

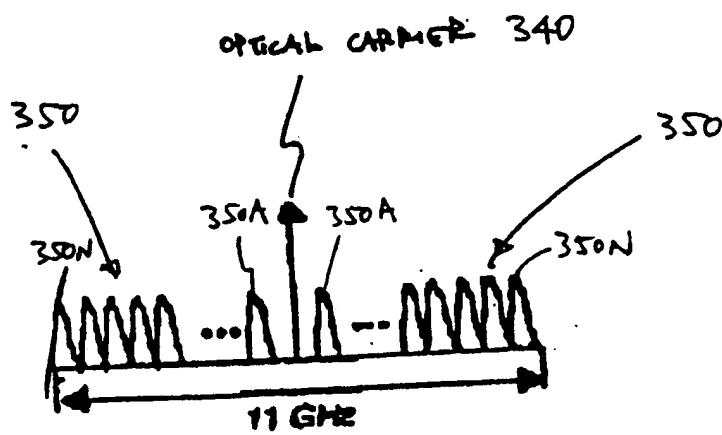
330

FIG. 3C

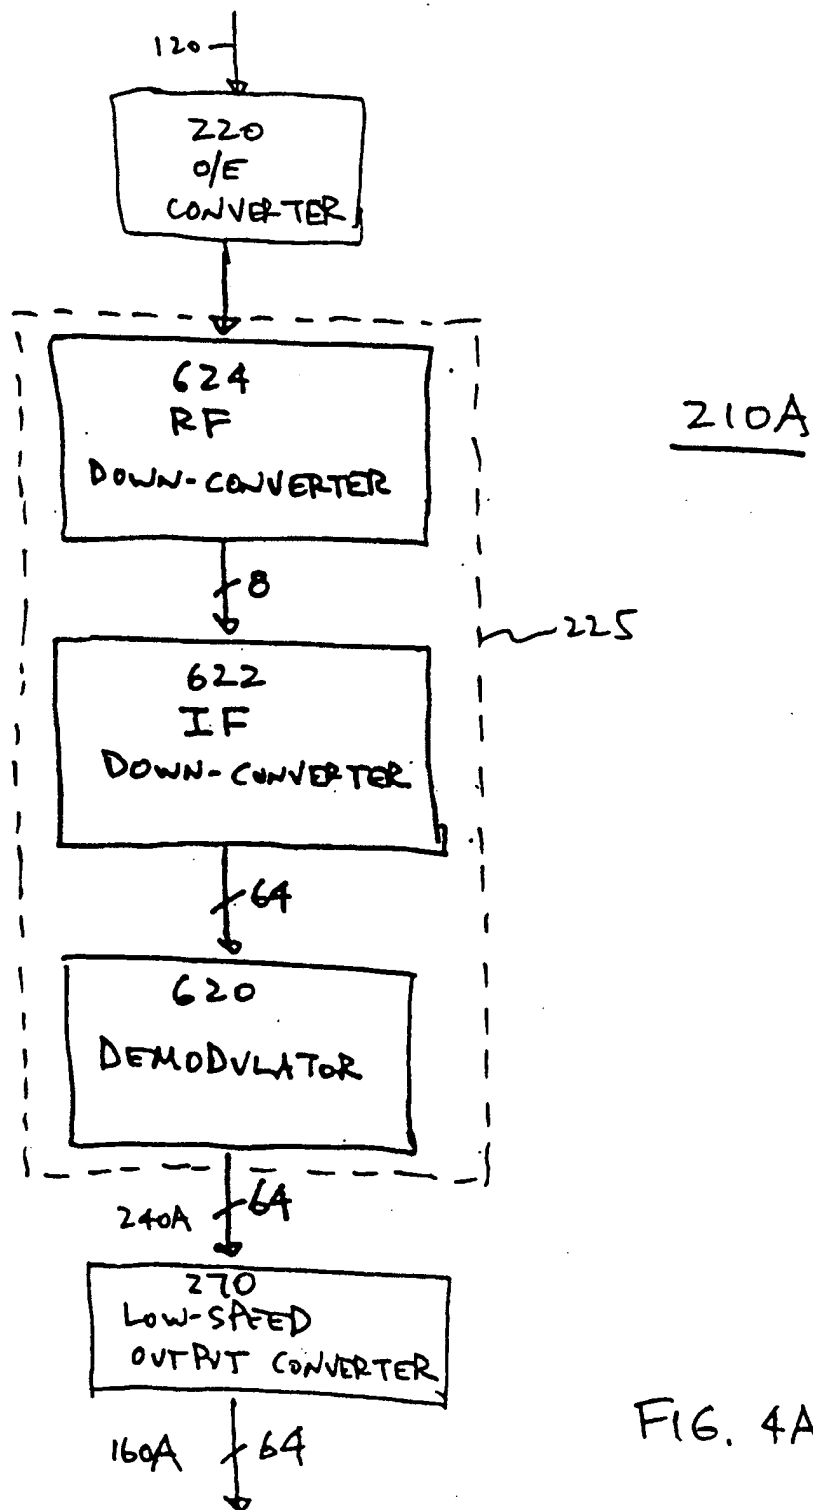


FIG. 4A

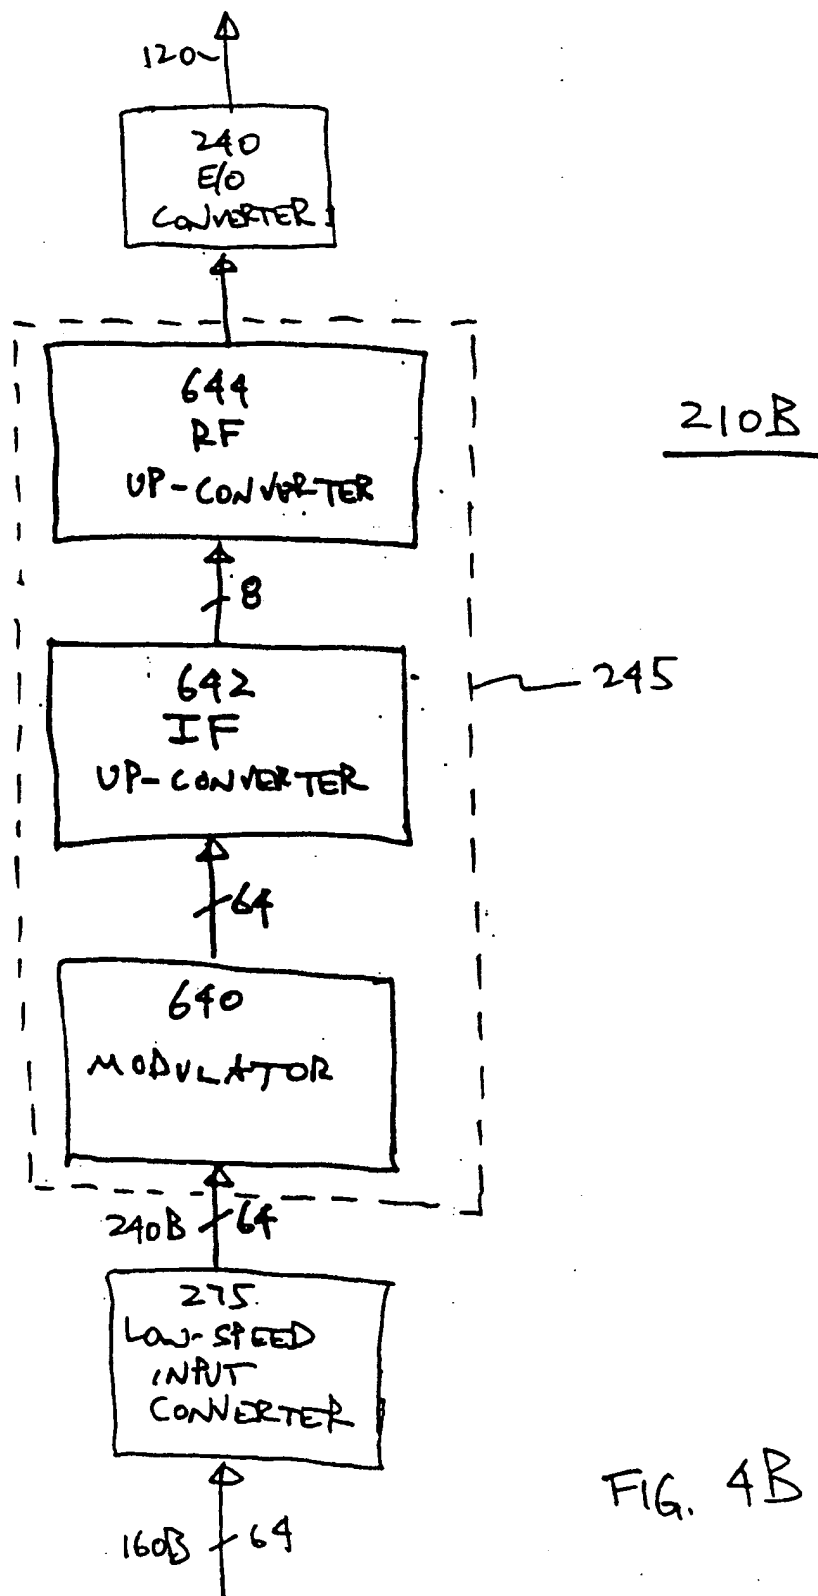


FIG. 4B

270

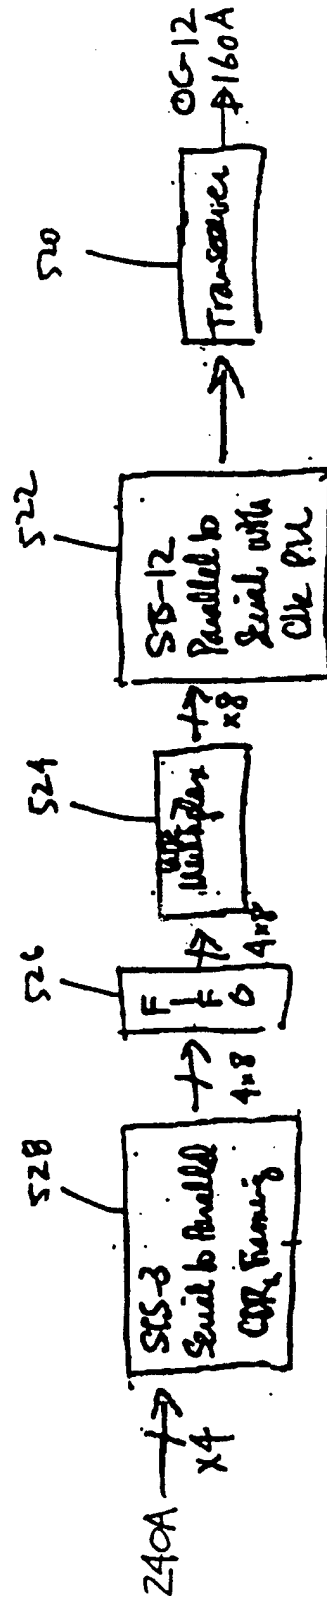


FIG. 5A

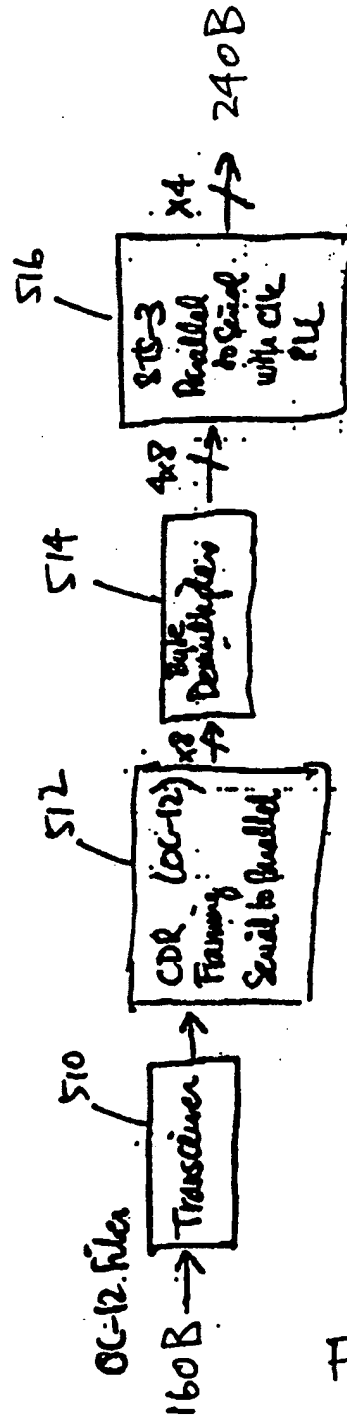
275

FIG. 5B

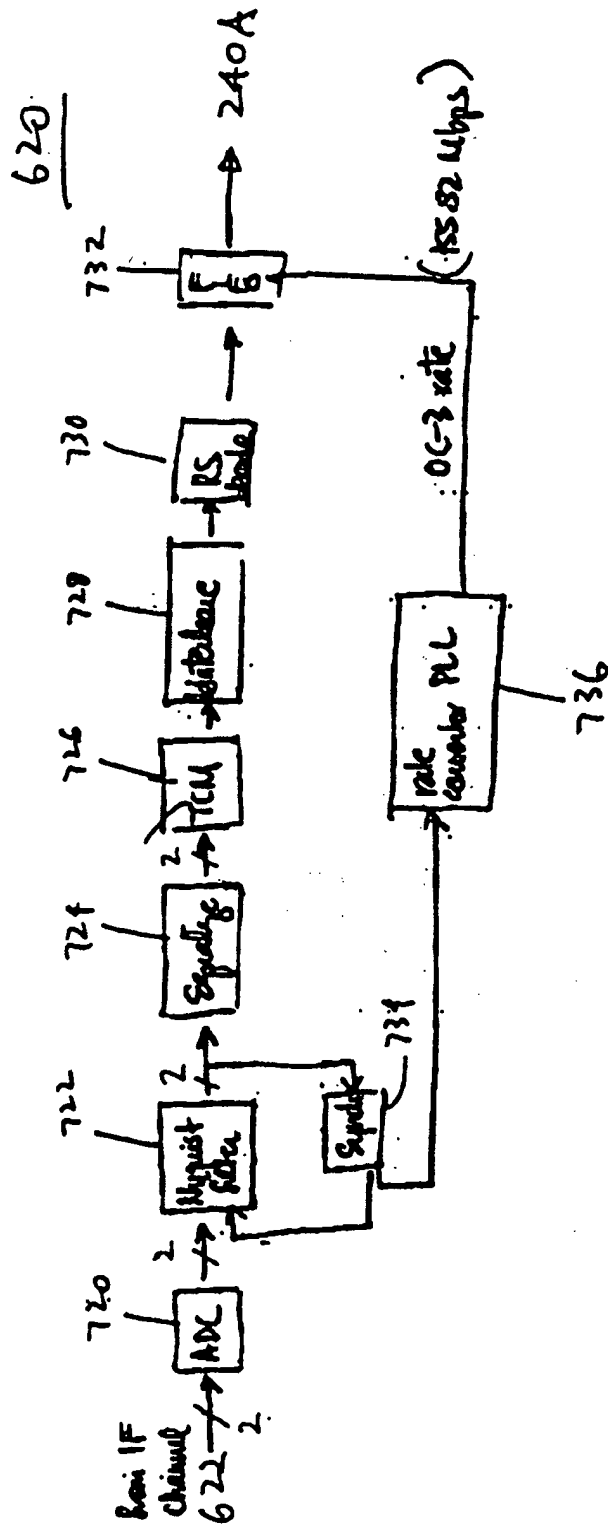


FIG. 6A

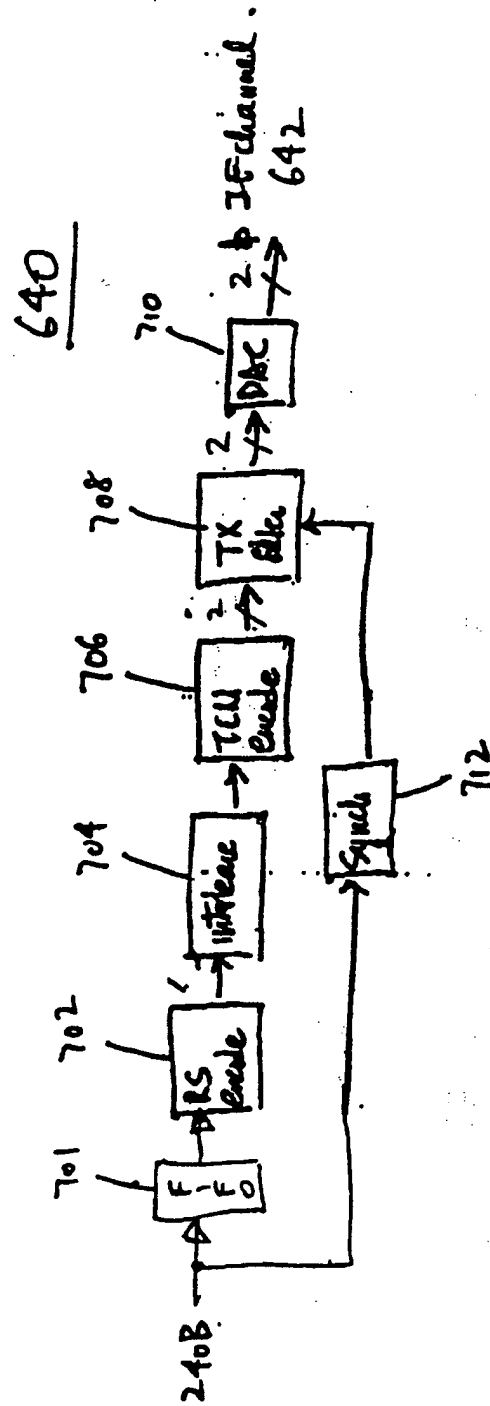


FIG. 6B

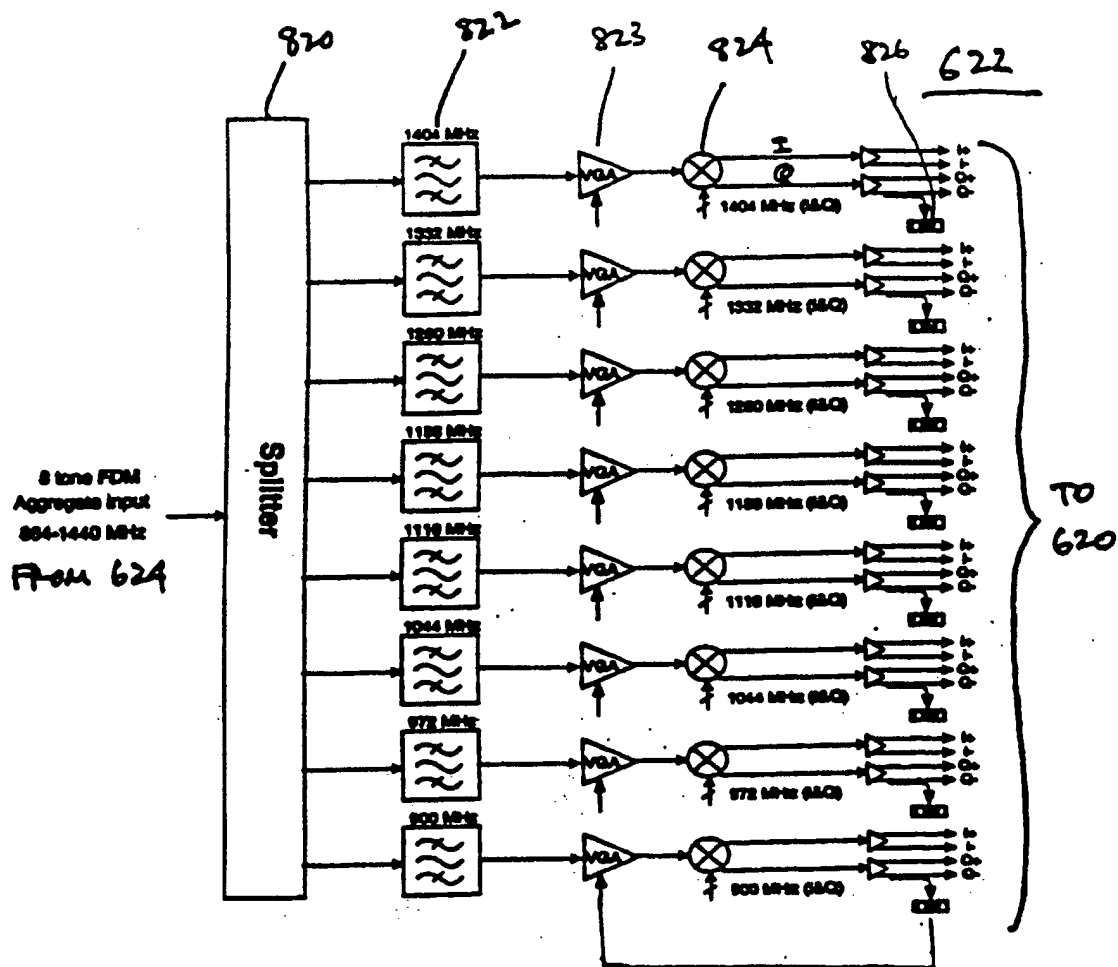


FIG. 7A

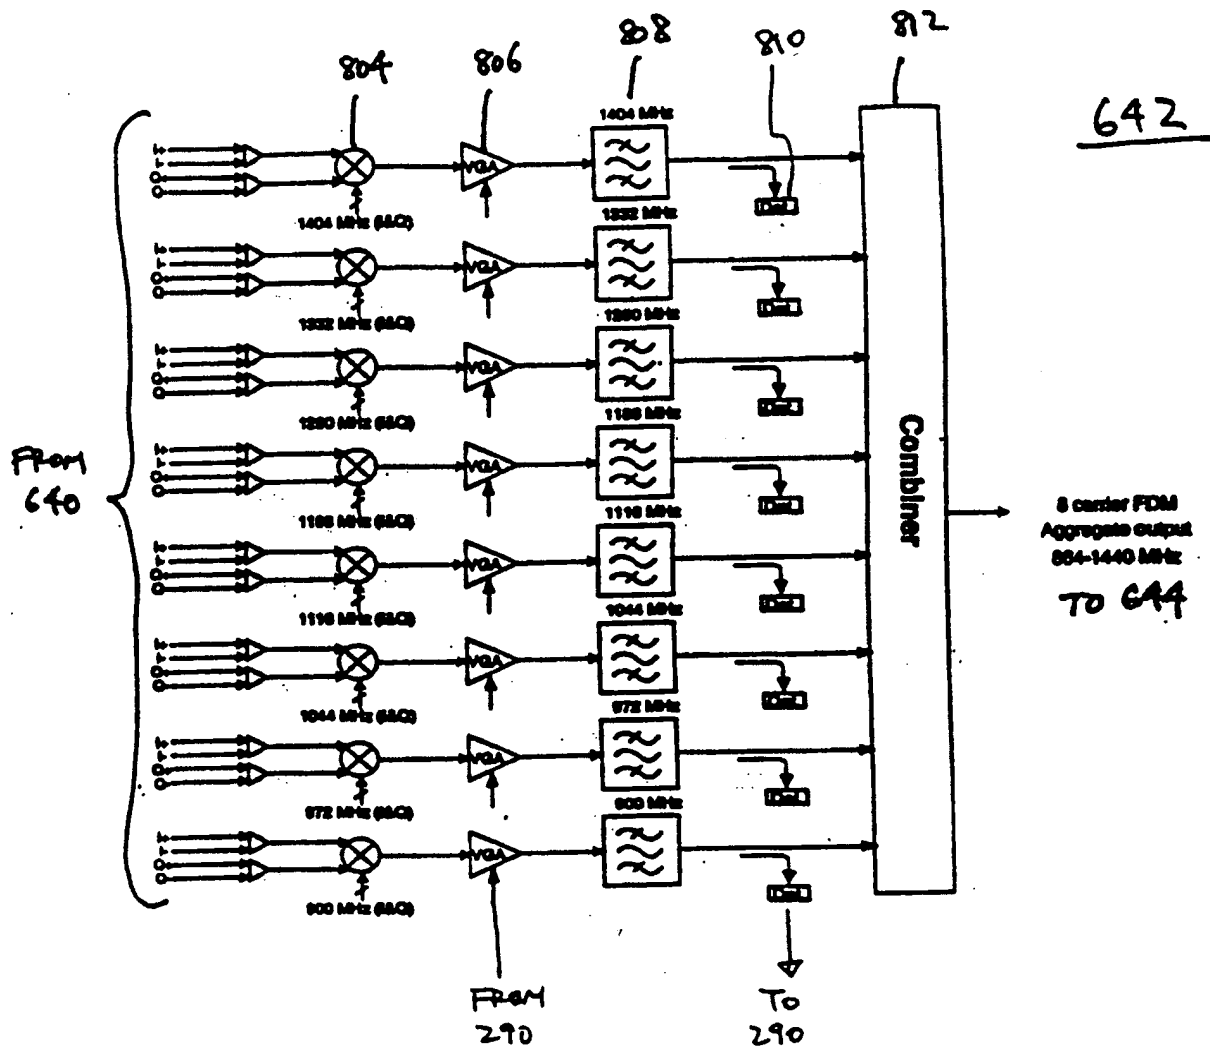


FIG. 7B

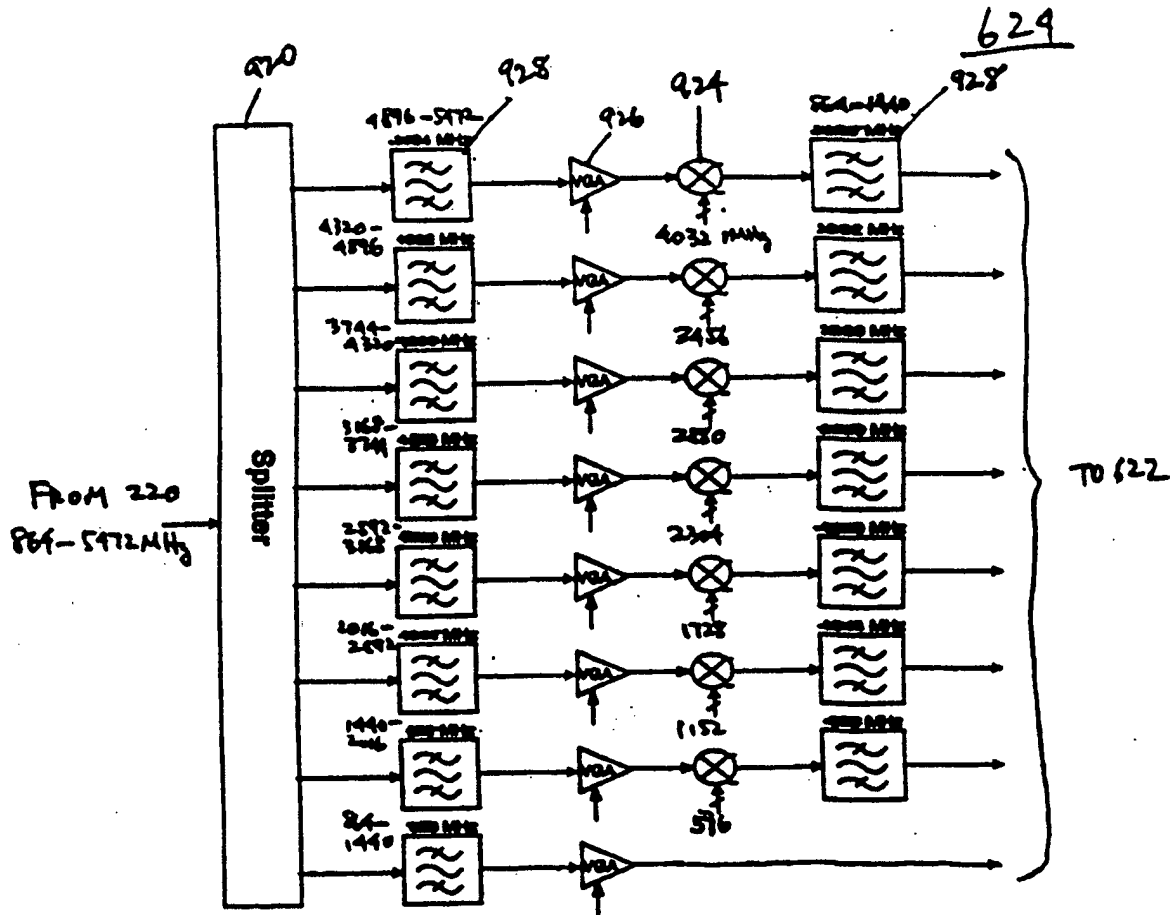


FIG. 8A

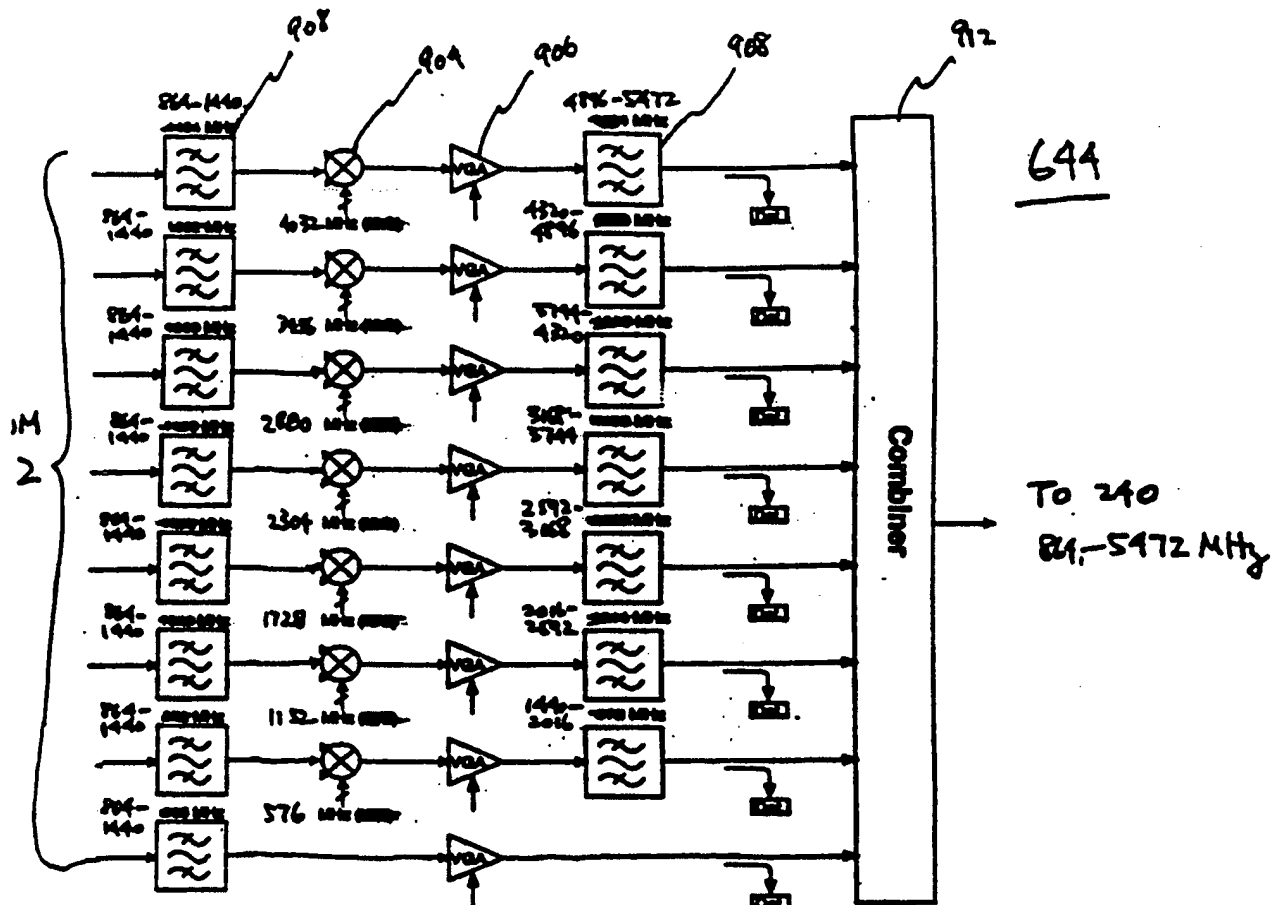


FIG. 8B

INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/US 00/26157

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B10/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04B H04J H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>SCHLUMP ET AL: "Electronic equalisation of PMD and chromatic dispersion induced distortion after 100 km standard fibre at 10 Gbit/s"</p> <p>PROCEEDINGS OF THE EUROPEAN CONFERENCE ON OPTICAL COMMUNICATION, 20 September 1998 (1998-09-20), XP002126317</p> <p>left-hand column, paragraph 1 -right-hand column, paragraph 7; figures 1,2</p> <p style="text-align: center;">--- -/--</p>	<p>1,2,7-9, 11,13, 16, 21-23, 25-27,35</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

19 January 2001

Date of mailing of the international search report

26/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Roldán Andrade, J

INTERNATIONAL SEARCH REPORT

Internat I Application No
PCT/US 00/26157

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 430 568 A (FRYMYER DON E ET AL) 4 July 1995 (1995-07-04)</p> <p>column 1, line 9 - line 13 column 2, line 51 -column 3, line 59 column 4, line 45 -column 7, line 47; figures 1,2 column 8, line 64 -column 9, line 10 column 9, line 30 -column 12, line 28; figures 5,6</p> <p>-----</p>	<p>1,2,7,8, 11,15, 16,21, 22,25,34</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/US 00/26157

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5430568 A	04-07-1995	AU 673223 B	31-10-1996
		AU 5678994 A	22-06-1994
		CN 1094552 A	02-11-1994
		EP 0705509 A	10-04-1996
		IL 107826 A	14-11-1996
		JP 8503827 T	23-04-1996
		WO 9413076 A	09-06-1994
<hr/>			

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/022628 A1

(51) International Patent Classification⁷: **H04B 10/18**

(21) International Application Number: PCT/US00/26157

(22) International Filing Date:
21 September 2000 (21.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/405,367 24 September 1999 (24.09.1999) US
09/569,761 12 May 2000 (12.05.2000) US

(71) Applicant: **KESTREL SOLUTIONS, INC.** [US/US];
2495 Leghorn Street, Mountain View, CA 94043 (US).

(72) Inventors: **NEWELL, Laurence, J.**; 13890 River Ranch
Circle, Saratoga, CA 95070 (US). **COWARD, James, F.**;
20455 Skyline Boulevard, La Honda, CA 94020 (US).

(74) Agents: **FARN, Michael, W.** et al.; Fenwick & West LLP,
Two Palo Alto Square, Palo Alto, CA 94306 (US).


(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, BZ, CA, CH, CN, CU, CZ, DE, DK,
EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD,
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,
SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU,
ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: CHANNEL GAIN CONTROL FOR AN OPTICAL COMMUNICATIONS SYSTEM UTILIZING FREQUENCY DI-
VISION MULTIPLEXING

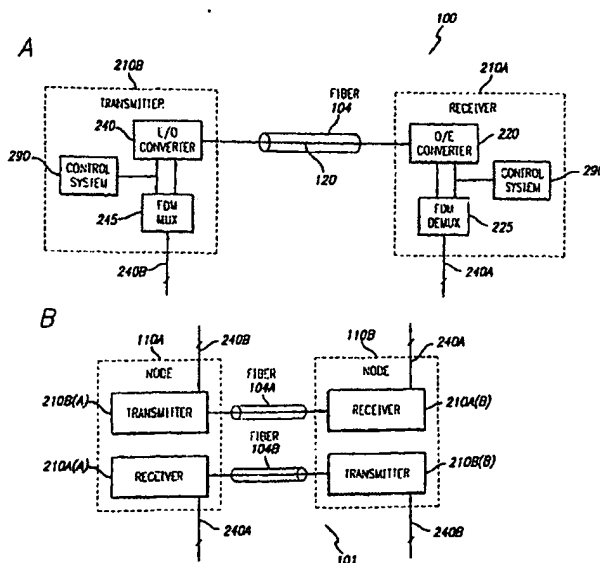

(57) Abstract: Frequency-dependent gain effects in an optical fiber communications system, such as fiber dispersion, may be compensated. A number of low-speed channels is to be transmitted across an optical fiber communications system. Each low-speed channel is allocated a different frequency band of the optical fiber communications system. The gain, including both attenuation and amplification, of the communications system at each of the frequency bands is estimated. The power of each low-speed channel is adjusted to compensate for the estimated gain effects. In a preferred embodiment, the low-speed channels are frequency division multiplexed together to produce an electrical high-speed channel suitable for transmission across the communications system.

WO 01/022628 A1

**(48) Date of publication of this corrected version:**

14 November 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 46/2002 of 14 November 2002, Section II

CHANNEL GAIN CONTROL FOR AN OPTICAL COMMUNICATIONS SYSTEM
UTILIZING FREQUENCY DIVISION MULTIPLEXING

5

BACKGROUND OF THE INVENTION

1. **Field of the Invention**

This invention relates generally to optical fiber communications, and more particularly, to the use of independent gain control for different frequency channels in an optical fiber communications systems utilizing frequency division multiplexing.

10

2. **Description of the Related Art**

As the result of continuous advances in technology, particularly in the area of networking, there is an increasing demand for communications bandwidth. For example, the growth of the Internet, home office usage, e-commerce and other broadband services is creating an ever-increasing demand for communications bandwidth. Upcoming widespread deployment of new bandwidth-intensive services, such as xDSL, will only further intensify this demand. Moreover, as data-intensive applications proliferate and data rates for local area networks increase, businesses will also demand higher speed connectivity to the wide area network (WAN) in order to support virtual private networks and high-speed Internet access. Enterprises that currently access the WAN through T1 circuits will require DS-3, OC-3, or equivalent connections in the near future. As a result, the networking infrastructure will be required to accommodate greatly increased traffic.

15

20

Optical fiber is a transmission medium that is well suited to meet this increasing demand. Optical fiber has an inherent bandwidth which is much greater than metal-based conductors, such as twisted pair or coaxial cable. There is a significant installed base of

25

optical fibers and protocols such as the SONET protocol have been developed for the transmission of data over optical fibers. The transmitter converts the data to be communicated into an optical form and transmits the resulting optical signal across the optical fiber to the receiver. The receiver recovers the original data from the received optical
5 signal. Recent advances in transmitter and receiver technology have also resulted in improvements, such as increased bandwidth utilization, lower cost systems, and more reliable service.

However, current optical fiber systems also suffer from drawbacks which limit their performance and/or utility, and many of these drawbacks are frequency dependent. For
10 example, optical fibers typically exhibit dispersion, meaning that signals at different frequencies travel at different speeds along the fiber. More importantly, if a signal is made up of components at different frequencies, the components travel at different speeds along the fiber and will arrive at the receiver at different times and/or with different phase shifts. As a result, the components may not recombine correctly at the receiver, thus distorting or
15 degrading the original signal. In fact, at certain frequencies, the dispersive effect may result in destructive interference at the receiver, thus effectively preventing the transmission of signals at these frequencies. Dispersion effects may be compensated by installing special devices along the fiber specifically for this purpose. However, the additional equipment results in additional cost and different compensators will be required for different types and
20 lengths of fiber.

As another example, the electronics in an optical fiber system typically will have a transfer function which is not flat. That is, the electronics will exhibit different gain at different frequencies. In other applications, an electronic equalizer may be used to compensate for these frequency-dependent gain variations in the electronics. However, in an
25 optical fiber system, the electronics produce an electrical signal which eventually is converted to/from an optical form. In order to take advantage of the wide bandwidth of optical fibers, the electrical signal produced by the electronics preferably will have a

bandwidth matched to the wide bandwidth of the optical fiber. Hence, any electronic equalizer will also have to operate over a wide bandwidth, which makes equalization difficult and largely impractical.

Thus, there is a need for optical communications systems which reduce or eliminate
5 the deleterious effects caused by frequency-dependent effects, such as fiber dispersion and the non-flat transfer function of electronics in the system.

SUMMARY OF THE INVENTION

In accordance with the present invention, a method for compensating for frequency-
10 dependent gain effects in an optical fiber communications system includes the following steps. At least two low-speed channels are received. Each low-speed channel is allocated a different frequency band of the optical fiber communications system for transmission across the communications system. The gain, including both attenuation and amplification, of the communications system at each of the frequency bands is estimated. The power of each low-
15 speed channel is adjusted to compensate for the estimated gain effects, for example to maintain a certain power or performance metric (such as channel error rate) after transmission across the communications system. In a preferred embodiment, the low-speed channels are frequency division multiplexed together to produce an electrical high-speed channel suitable for transmission across the communications system.

20 In one alternative, the estimated gain includes an estimate for gain due to propagation through an optical fiber in the communications system. For example, the estimated gain could include losses due to dispersion at the various frequency bands. In another alternative, the gain is estimated by receiving a feedback signal based on the low-speed channel after it has been transmitted across the optical fiber communications system. The power of the low-
25 speed channel is adjusted responsive to the feedback signal.

In another aspect of the invention, an optical fiber communications system for transmitting at least two low-speed channels across the communications system includes a variable gain block coupled to a frequency division multiplexer. Each low-speed channel is allocated a frequency band of the communications system. The variable gain block adjusts
5 the power of each low-speed channel to compensate for an estimated gain of the communications system at the frequency band allocated to the low-speed channel. In one embodiment, the power is adjusted in order to maintain the power received after transmission across the communications system. In another embodiment, a performance metric (such as the channel error rate) is measured after the low-speed channel has been transmitted across
10 the communications system, and the power is then adjusted in response to feedback based on the measured performance metric. The FDM multiplexer combines the power-adjusted low-speed channels into an electrical high-speed channel suitable for transmission across the communications system.

In another aspect of the invention, the communications system further includes an
15 E/O converter, an optical fiber, an O/E converter, a FDM demultiplexer and monitor circuitry, and a control system. The E/O converter converts the electrical high-speed channel from the FDM multiplexer to an optical high-speed channel, which is transported across the optical fiber. The O/E converter receives the transported channel and converts it back to an electrical high-speed channel. The FDM demultiplexer frequency division demultiplexes the
20 electrical high-speed channel into its constituent low-speed channels. The monitor circuitry is coupled to the FDM demultiplexer and generates a feedback signal responsive to the frequency division demultiplexed low-speed channels. The control system adjusts the gain applied by the variable gain block in response to the feedback signal.

The present invention is particularly advantageous because frequency-dependent gain
25 effects, such as fiber dispersion and the non-flat transfer function of electronics in the system, may be compensated.

BRIEF DESCRIPTION OF THE DRAWING

The invention has other advantages and features which will be more readily apparent from the following detailed description of the invention and the appended claims, when taken in conjunction with the accompanying drawing, in which:

5 FIG. 1A is a block diagram of a fiber optic communications system 100 in accordance with the present invention;

FIG. 1B is a block diagram of another fiber optic communications system 101 in accordance with the present invention;

FIG. 2 is a flow diagram illustrating operation of system 100;

10 FIG. 3A-3C are frequency diagrams illustrating operation of system 100;

FIG. 4A is a block diagram of a preferred embodiment of FDM demultiplexer 225;

FIG. 4B is a block diagram of a preferred embodiment of FDM multiplexer 245;

FIG. 5A is a block diagram of a preferred embodiment of low-speed output converter
270;

15 FIG. 5B is a block diagram of a preferred embodiment of low-speed input converter
275;

FIG. 6A is a block diagram of a preferred embodiment of demodulator 620;

FIG. 6B is a block diagram of a preferred embodiment of modulator 640;

FIG. 7A is a block diagram of a preferred embodiment of IF down-converter 622;

20 FIG. 7B is a block diagram of a preferred embodiment of IF up-converter 642;

FIG. 8A is a block diagram of a preferred embodiment of RF down-converter 624;
and

FIG. 8B is a block diagram of a preferred embodiment of RF up-converter 644.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1A is a block diagram of a fiber optic communications system 100 in accordance with the present invention. System 100 includes a transmitter 210B coupled to a receiver 210A by an optical fiber 104. Transmitter 210B and receiver 210A are both based on frequency division multiplexing (FDM). Transmitter 210B includes an FDM multiplexer 245
10 coupled to an E/O converter 240. The FDM multiplexer 245 combines a plurality of incoming signals 240B into a single signal using FDM techniques, and E/O converter 240 converts this single signal from electrical to optical form 120. The E/O converter 240 preferably includes an optical source, such as a laser, and an optical modulator, such as a Mach Zender modulator, which modulates the optical carrier produced by the optical source
15 with an incoming electrical signal. For convenience, the incoming signals 240B shall be referred to as low-speed channels; the single signal formed by FDM multiplexer 245 as an electrical high-speed channel, and the final optical output 120 as an optical high-speed channel.

Receiver 210A reverses the function performed by transmitter 210B, reconstructing
20 the original channels 240B at the receiver location. More specifically, receiver 120 includes an O/E converter 220 coupled to an FDM demultiplexer 225. The O/E converter 220, preferably a detector such as a high-speed PIN diode, converts the incoming optical high-speed channel 120 from optical to electrical form. The frequency division demultiplexer 225 frequency division demultiplexes the electrical high-speed channel into a plurality of low-
25 speed channels 240A.

The various components in transmitter 210B and receiver 210A are controlled by their respective control systems 290. The control systems 290 preferably also have an external port to allow external control of the transmitter 210B and receiver 210A. For example, an external network management system may manage a large fiber network, including a number
5 of transmitters 210B and receivers 210A. Alternately, a technician may connect a craft terminal to the external port to allow local control of transmitter 210B or receiver 210A, as may be desirable during troubleshooting.

Various aspects of the invention will be illustrated using the example system 100. However, the invention is not limited to this particular system 100. For example, FIG. 1B is
10 a block diagram of another fiber optic communications system 101 also in accordance with the present invention. System 101 includes two nodes 110A and 110B, each of which includes a transmitter 210B and receiver 210A. The two nodes 110 are coupled to each other by two fibers 104A and 104B, each of which carries traffic from one node 110 to the other 110. Fiber 104A carries traffic from transmitter 210B(A) to receiver 210A(B); whereas fiber
15 104B carries traffic from transmitter 210B(B) to receiver 210A(A). In a preferred embodiment, the fibers 104 also carry control or other overhead signals between the nodes 110. In an alternate embodiment, the nodes 110 may be connected by a single fiber 104 which carries bidirectional traffic. In other embodiments, the nodes 110 may contain additional functionality, such as add-drop functionality, thus allowing the nodes 110 to from
20 more complex network configurations.

FIG. 2 is a flow diagram illustrating operation of system 100. At a high level, transmitter 210B combines low-speed channels 240B into an optical high-speed channel 120 using FDM techniques (steps 318B, 316B and 314B). As part of this process, the power of each low-speed channel 240B is adjusted to compensate for estimated gain effects which the
25 low-speed channel 240B will experience while propagating through system 100 (steps 321 and 323). The gain-compensated high-speed channel 120 is then transmitted across fiber 104

(steps 312). Receiver 210A then demultiplexes the received optical high-speed channel 120 into its constituent low-speed channels 240A (steps 314A, 316A and 318A).

In more detail, low-speed channels 240B are received 318B by transmitter 210B. The FDM multiplexer 245 combines these channels into a high-speed channel using frequency
5 division multiplexing 316B techniques. Typically, each low-speed channel 240B is modulated on a carrier frequency distinct from all other carrier frequencies and these modulated carriers are then combined to form a single electrical high-speed channel, typically an RF signal. E/O converter 240 converts 314B the electrical high-speed channel to optical form, preferably via an optical modulator which modulates an optical carrier with the
10 electrical high-speed channel. The optical high-speed channel 120 is transmitted 312B across fiber 104 to receiver 210A.

FIGS. 3A-3C are frequency diagrams illustrating the mapping of low-speed channels 240B to optical high-speed channel 120 in system 100. These diagrams are based on an example in which high-speed channel 120 carries 10 billion bits per second (Gbps), which is
15 equivalent in data capacity to an OC-192 data stream. Each low-speed channel 240 is an electrical signal which has a data rate of 155 million bits per second (Mbps) and is similar to an STS-3 signal. This allows 64 low-speed channels 240 to be included in each high-speed channel 120. The invention, however, is not to be limited by this example.

FIG. 3A depicts the frequency spectrum 310 of one low-speed channel 240B after
20 pre-processing. As mentioned previously, each low-speed channel 240B has a data rate of 155 Mbps. In this example, the low-speed channel 240B has been pre-processed to produce a spectrally efficient waveform (i.e., a narrow spectrum), as will be described below. The resulting spectrum 310 has a width of approximately 72 MHz with low sidelobes. FIG. 3B is the frequency spectrum 320 of the electrical high-speed channel produced by FDM
25 multiplexer 245. Each of the 64 low-speed channels 240B is allocated a different frequency band and then frequency-shifted to that band. The signals are combined, resulting in the 64-lobed waveform 320. FIG. 3C illustrates the spectra 330 of the optical high-speed channel

120. The RF waveform 320 of FIG. 3B is intensity modulated. The result is a double sideband signal with a central optical carrier 340. Each sideband 350 has the same width as the RF waveform 320, resulting in a total bandwidth of approximately 11 GHz.

Receiver 210A reverses the functionality of transmitter 210B. The optical high-speed
5 channel 120 is received 312A by the high-speed receiver 210A. O/E converter 220 converts
314A the optical high-speed channel 120A to an electrical high-speed channel, typically an
RF signal. This electrical high-speed channel includes a number of low-speed channels
which were combined by frequency division multiplexing. FDM demultiplexer 225
frequency division demultiplexes 316A the high-speed signal to recover the low-speed
10 channels 240A, which are then transmitted 318A to other destinations. The frequency
spectrum of signals as they propagate through receiver 210A generally is the reverse of that
shown in FIG. 3.

Note that each low-speed channel 240 has been allocated a different frequency band
for transmission from transmitter 210B to receiver 210A. For example, referring again to
15 FIG. 3, the low frequency channel 310A may enter transmitter 210B at or near baseband.
FDM multiplexer 245 upshifts this channel 310A to a frequency of approximately 900 MHz.
E/O converter 240 then intensity modulates this channel, resulting in two sidelobes 350A
which are 900 MHz displaced from the optical carrier 340. Low-speed channel 310A
propagates across fiber 104 at these particular frequencies and is then downshifted
20 accordingly by receiver 210A. In contrast, the high frequency channel 310N is upshifted by
FDM multiplexer 245 to a frequency of approximately 5436 MHz and sidelobes 350N are
correspondingly displaced with respect to optical carrier 340.

Since each low-speed channel 240 is allocated a different frequency band, each
channel will typically experience a different gain as it propagates through system 100. For
25 example, fiber losses, such as due to chromatic dispersion or polarization mode dispersion,
typically will be different for sidelobes 350A and 350N since they are located at different
frequencies. Similarly, the gain due to propagation through the various electronic

components may also differ since electronics may exhibit different responses at different frequencies. The term "gain" is used here to refer to both losses and amplification.

However, since the frequency band of each low-speed channel 240 is known, the gain which the low-speed channel 240 will experience as it propagates through system 100 may be estimated 323 and then compensated for 321 by adjusting the power of each low-speed channel. For example, if sidelobe 350N is expected to experience more loss than sidelobe 350A due to chromatic dispersion, then sidelobe 350N may be amplified with respect to sidelobe 350A in order to compensate for the expected higher loss. The amplification may be applied directly to sidelobe 350N or at other locations within system 100, for example to lobe 310N exiting the FDM multiplexer 245 or to the corresponding low-speed channel 240B as it enters the system 100.

The gain may be estimated in any number of ways. For example, with respect to fiber 104, in one embodiment, standard analytical models are used to estimate the gain due to propagation through fiber 104 at different frequencies due to different physical phenomena. Often, these gain estimates will depend on the length of fiber 104, which itself may be estimated based on the expected application. Alternately, the length may be measured, for example by using time-domain reflectometry. In a preferred embodiment, a test signal is sent from node 110A over fiber 104A to node 110B. Node 110B receives the signal and then returns it to node 110A via fiber 104B. A timer circuit measures the round-trip elapsed time, which is used to estimate the fiber length.

Similarly, the gain estimates for fiber 104 may alternately be determined empirically by measuring the actual gain experienced at different frequencies or by using empirical models. Analogous techniques may be applied to the rest of system 100. For example, the gain of electronics may be estimated based on models or may be measured by calibrations, for example performed by the manufacturer at the time of production.

As one example, polarization mode dispersion is one effect which attenuates signals transmitted through a fiber 104. This effect typically results in higher attenuation at higher frequencies. Thus, if all of the sidelobes 350 were of equal power when they entered the fiber 104, the higher frequency sidelobes typically would experience more attenuation. This
5 would result in a rolloff in power received at the receiver 210A at the higher frequencies. Since it is desirable for power for all sidelobes 350 to be roughly equal at the receiver 210A, it is desirable to compensate for this rolloff effect. Accordingly, at the transmitter 210B, the power of the higher frequency low-speed channels 240 is boosted 321 with respect to the lower frequency channels 240 so that after propagation through fiber 104, the sidelobes 350
10 are of roughly equal power when they reach the receiver 210A. In a preferred embodiment, the time-varying nature of the attenuation introduced by polarization mode dispersion is statistically modelled. A specification for worst-case attenuation due to polarization mode dispersion is selected based on the statistical model. In other words, based on the statistical model, there will only be a low probability that at any instant in time the actual attenuation
15 introduced by polarization mode dispersion will be greater than the worst-case attenuation specified in the specification. The power of each low-speed channel 240 is adjusted 321 so that, even if the attenuation is equal to the worst case attenuation, the power at receiver 210A will be sufficient to meet the other performance requirements of system 100.

The gain may also be estimated using closed loop techniques. In other words, the
20 low-speed channel 240 is transmitted across system 100 and a feedback signal is produced responsive to this transmission. The power of the low-speed channel is then adjusted 321 responsive to the feedback signal. As examples, in one embodiment, the feedback signal may depend on the power of the low-speed channel after it has been transmitted across system 100. In another embodiment, it may depend on the signal to noise ratio or various error rates
25 in the received low-speed channel 240A.

In a preferred embodiment, the feedback signal is generated by monitor circuitry coupled to the FDM demultiplexer 225 and fed back from receiver 210A to transmitter 210B

via fiber 104, as opposed to some other communications channel. In system 101 of FIG. 1B, the control systems 290 may communicate with each other via the bidirectional traffic on these fibers 104. For example, consider traffic flow from transmitter 210B(A) across fiber 104A to receiver 210A(B). The feedback signal generated at receiver 210A(B) for this traffic is fed back to transmitter 210B(A) via the other fiber 104B. The control system 290 for node 110A then generates the appropriate control signals to adjust the powers of the low-speed channels. Similarly, the feedback signal for traffic flowing from transmitter 210B(B) across fiber 104B to receiver 210A(A) may be fed back to transmitter 210B(B) via the other fiber 104A.

10 In a preferred embodiment, a frequency band located between the sidebands 350 (see FIG. 3C) and the optical carrier 340 is allocated for control and/or administrative purposes (e.g., for downloading software updates). In a preferred embodiment, this control channel is also used to transmit the feedback signal between the nodes 110 and for time domain reflectometry in order to estimate the length of the fiber. Since it is often desirable to establish initial communications between nodes 110 using the control channel before establishing the actual data links using sidebands 350, the control channel preferably has a lower data rate and is less susceptible to transmission impairments than the data carrying sidebands 350. In an alternate embodiment, one of the frequency bands within the electrical high-speed channel 320 is used for the feedback signal.

20 Any number of techniques may be used to adjust 321 the power of the low-speed channels 240. For example, if a closed loop technique is used, standard control algorithms such as proportional control may be used. In another approach, a common mode and a differential mode adjustment may be used alternately. In the differential mode adjustment, the total power of all low-speed channels is kept constant while the allocation of power among the various channels is adjusted. Thus, for example, the gain applied to sidelobe 350A may be increased by a certain amount if the gain applied to sidelobe 350N is reduced by the same amount, so that the total power in all sidelobes 350 remains constant. In the

common mode adjustment, the allocation of power among the various low-speed channels 240 remains constant while the total power is adjusted. Thus, for example, the gain applied to sidelobes 350A, 350N and all other sidelobes 350 may be increased by the same amount, thus increasing the total power.

5 The use of frequency division multiplexing in system 100 allows the transport of a large number of low-speed channels 240 over a single fiber 104 in a spectrally-efficient manner. It also reduces the cost of system 100 since the bulk of the processing performed by system 100 is performed on low-speed electrical signals. In addition, since each low-speed channel is allocated a specific frequency band, the use of frequency division multiplexing
10 allows different gain to be applied to each low-speed channel in an efficient manner, thus compensating for the specific gain to be experienced by the low-speed channel as it propagates through system 100.

FIGS. 4-8 are more detailed block diagrams illustrating various portions of a preferred embodiment of system 100. Each of these figures includes a part A and a part B, which
15 correspond to the receiver 210A and transmitter 210B, respectively. These figures will be explained by working along the transmitter 210B from the incoming low-speed channels 240B to the outgoing high-speed channel 120, first describing the component in the transmitter 120B (i.e., part B of each figure) and then describing the corresponding components in the 120A (i.e., part A of each figure). These figures are based on the same
20 example as FIG. 3, namely 64 STS-3 data rate low-speed channels 240 are multiplexed into a single optical high-speed channel 120. However, the invention is not to be limited by this example or to the specific structures disclosed.

FIG. 4B is a block diagram of a preferred embodiment of transmitter 210B. In addition to FDM multiplexer 245 and E/O converter 240, this transmitter 210B also includes
25 a low-speed input converter 275 coupled to the FDM multiplexer 245. FDM multiplexer 245 includes a modulator 640, IF up-converter 642, and RF up-converter 644 coupled in series. FIGS. 6B-8B show further details of each of these respective components. Similarly, FIG.

4A is a block diagram of a preferred embodiment of receiver 210A. In addition to O/E converter 220 and FDM demultiplexer 225, this receiver 210A also includes a low-speed output converter 270 coupled to the FDM demultiplexer 225. FDM demultiplexer 225 includes an RF down-converter 624, IF down-converter 622, and demodulator 620 coupled in series, with FIGS. 6A-8A showing the corresponding details.

FIGS. 5A-5B are block diagrams of one type of low-speed converter 270,275. In the transmit direction, low-speed input converter 275 converts tributaries 160B to low-speed channels 240B, which have the same data rate as STS-3 signals in this embodiment. The structure of converter 275 depends on the format of the incoming tributary 160B. For example, if tributary 160B is an STS-3 signal then no conversion is required. If it is an OC-3 signal, then converter 275 will perform an optical to electrical conversion.

FIG. 5B is a converter 275 for an OC-12 tributary. Converter 275 includes an O/E converter 510, CDR 512, TDM demultiplexer 514, and parallel to serial converter 516 coupled in series. The O/E converter 510 converts the incoming OC-12 tributary 160B from optical to electrical form, producing the corresponding STS-12 signal. CDR 512 performs clock and data recovery of the STS-12 signal and also determines framing for the signal. CDR 512 also converts the incoming bit stream into a byte stream. The output of CDR 512 is byte-wide, as indicated by the "x8." Demultiplexer 514 receives the signal from CDR 512 one byte at a time and byte demultiplexes the recovered STS-12 signal using time division demultiplexing (TDM) techniques. The result is four separate byte-wide signals, as indicated by the "4x8," each of which is equivalent in data rate to an STS-3 signal and with the corresponding framing. Converter 516 also converts each byte-wide signal into a serial signal at eight times the data rate, with the resulting output being four low-speed channels 240B, each at a data rate of 155 Mbps.

Low-speed input converter 270 of FIG. 5A implements the reverse functionality of converter 275, converting four 155 Mbps low-speed channels 240A into a single outgoing OC-12 tributary 160A. In particular, converter 270 includes CDR 528, FIFO 526, TDM

multiplexer 524, parallel to serial converter 522, and E/O converter 520 coupled in series. CDR 528 performs clock and data recovery of each of the four incoming low-speed channels 240A, determines framing for the channels, and converts the channels from serial to byte-wide parallel. The result is four byte-wide signals entering FIFO 526. FIFO 526 is a buffer
5 which is used to synchronize the four signals in preparation for combining them into a single STS-12 signal. Multiplexer 524 performs the actual combination using TDM, on a byte level, to produce a single byte-wide signal equivalent in data capacity to an STS-12 signal. Parallel to serial converter 522 adds STS-12 framing to complete the STS-12 signal and converts the signal from byte-wide parallel to serial. E/O converter converts the STS-12
10 signal to electrical form, producing the outgoing OC-12 tributary 160A.

Converters 270 and 275 have been described in the context of OC-3 and OC-12 tributaries and low-speed channels with the same data rate as STS-3 signals, but the invention is not limited to these protocols. Alternate embodiments can vary the number, bit rate, format, and protocol of some or all of these tributaries 160. One advantage of the FDM
15 approach illustrated in system 100 is that the system architecture is generally independent of these parameters. For example, the tributaries 160 can comprise four 2.5 Gbps data streams, 16 622 Mbps data streams, 64 155 Mbps data streams, 192 51.84 Mbps data streams, or any other bit rate or combinations of bit rates, without requiring major changes to the architecture of system 100.

20 In one embodiment, the tributaries 160 are at data rates which are not multiples of the STS-3 data rate. In one variant, low-speed input converter 275 demultiplexes the incoming tributary 160B into some number of parallel data streams and then stuffs null data into each resulting stream such that each stream has an STS-3 data rate. For example, if tributary 160B has a data rate of 300 Mbps, converter 275 may demultiplex the tributary into four 75 Mbps
25 streams. Each stream is then stuffed with null data to give four 155 Mbps low-speed channels. In another variant, the speed of the rest of system 100 (specifically the modulator 640 and demodulator 620 of FIG. 4) may be adjusted to match that of the tributary 160.

Low-speed output converter 270 typically will reverse the functionality of low-speed input converter 275.

Referring to FIG. 6B, modulator 640 modulates the 64 incoming low-speed channels 240B to produce 64 QAM-modulated channels which are input to the IF up-converter 642.

5 For convenience, the QAM-modulated channels shall be referred to as IF channels because they are inputs to the IF up-converter 642. In this embodiment, each low-speed channel 240 is modulated separately to produce a single IF channel and FIG. 6B depicts the portion of modulator 640 which modulates one IF channel. Modulator 640 in its entirety would include 64 of the portions shown in FIG. 6B. For convenience, the single channel shown in FIG. 6B

10 shall also be referred to as a modulator 640. Modulator 640 includes a FIFO 701, Reed-Solomon encoder 702, an interleaver 704, a trellis encoder 706, a digital filter 708 and a D/A converter 710 coupled in series. Modulator 640 also includes a synchronizer 712 coupled between the incoming low-speed channel 240B and the filter 708.

Modulator 640 operates as follows. FIFO 701 buffers the incoming low-speed

15 channel. Reed-Solomon encoder 702 encodes the low-speed channel 240B according to a Reed-Solomon code. Programmable Reed-Solomon codes are preferred for maintaining very low BER (typ. lower than 10^{-12}) with low overhead (typ. less than 10%). This is particularly relevant for optical fiber systems because they generally require low bit error rates (BER) and any slight increase of the interference or noise level will cause the BER to exceed the

20 acceptable threshold. For example, a Reed-Solomon code of (204,188) can be applied for an error correction capability of 8 error bytes per every 204 encoded bytes.

The interleaver 704 interleaves the digital data string output by the Reed-Solomon encoder 702. The interleaving results in more robust error recovery due to the nature of trellis encoder 706. Specifically, forward error correction (FEC) codes are able to correct

25 only a limited number of mistakes in a given block of data, but convolutional encoders such as trellis encoder 706 and the corresponding decoders tend to cause errors to cluster together. Hence, without interleaving, a block of data which contained a large cluster of errors would

be difficult to recover. However, with interleaving, the cluster of errors is distributed over several blocks of data, each of which may be recovered by use of the FEC code. Convolution interleaving of depth 0 is preferred in order to minimize latency.

The trellis encoder 706 applies a QAM modulation, preferably 16 state QAM modulation, to the digital data stream output by the interleaver 704. The result typically is a complex baseband signal, representing the in-phase and quadrature (I and Q) components of a QAM-modulated signal. Trellis encoder 706 implements the QAM modulation digitally and the resulting QAM modulated signal is digitally filtered by filter 708 in order to reduce unwanted sidelobes and then converted to the analog domain by D/A converter 710.

10 Synchronizer 712 performs clock recovery on the incoming low-speed channel 240B in order to synchronize the digital filter 708. The resulting IF channel is a pair of differential signals, representing the I and Q components of the QAM-modulated signal. In alternate embodiments, the QAM modulation may be implemented using analog techniques.

Referring to FIG. 6A, demodulator 620 reverses the functionality of modulator 640, recovering a low-speed channel 240A from an incoming IF channel (i.e., analog I and Q components in this embodiment) received from the IF down-converter 622. Demodulator 620 includes an A/D converter 720, digital Nyquist filter 722, equalizer 724, trellis decoder 726, deinterleaver 728, Reed-Solomon decoder 730 and FIFO 732 coupled in series.

Demodulator 620 further includes a synchronizer 734 which forms a loop with Nyquist filter 722 and a rate converter phase-locked loop (PLL) 736 which is coupled between

20 synchronizer 734 and FIFO 732.

Demodulator 620 operates as FIG. 6A would suggest. The A/D converter 720 converts the incoming IF channel to digital form and Nyquist filter 722, synchronized by synchronizer 734, digitally filters the result to reduce unwanted artifacts from the conversion.

25 Equalizer 724 applies equalization to the filtered result, for example to compensate for distortions introduced in the IF signal processing. Trellis decoder 726 converts the I and Q complex signals to a digital stream and deinterleaver 728 reverses the interleaving process.

Trellis decoder 726 may also determine the error rate in the decoding process, commonly referred to as the channel error rate, which may then be used to estimate the gain of system 100 as described previously. Reed-Solomon decoder 730 reverses the Reed-Solomon encoding, correcting any errors which have occurred. If the code rate used results in a data
5 rate which does not match the rate used by the low-speed channels, FIFO 732 and rate converter PLL 736 transform this rate to the proper data rate.

Referring again to transmitter 210B, IF up-converter 642 receives the 64 IF channels from modulator 640. Together, IF up-converter 642 and RF up-converter 644 combine these 64 IF channels into a single RF signal using FDM techniques. In essence, each of the IF
10 channels (or equivalently, each of the 64 low-speed channels 240B) is allocated a different frequency band within the RF signal. The allocation of frequency bands shall be referred to as the frequency mapping, and, in this embodiment, the IF channels may also be referred to as FDM channels since they are the channels which are FDM multiplexed together. The multiplexing is accomplished in two stages. IF up-converter 642 first combines the 64 IF
15 channels into 8 RF channels, so termed because they are inputs to the RF up-converter 644. In general, the terms "IF" and "RF" are used throughout as labels rather than, for example, indicating some specific frequency range. RF up-converter 644 then combines the 8 RF channels into the single RF signal, also referred to as the electrical high-speed channel.

Referring to FIG. 7B, IF up-converter 642 includes eight stages (identical in this
20 embodiment, but not necessarily so), each of which combines 8 IF channels into a single RF channel. FIG. 7B depicts one of these stages, which for convenience shall be referred to as an IF up-converter 642. IF up-converter 642 includes eight frequency shifters and a combiner 812. Each frequency shifter includes a modulator 804, a variable gain block 806, a filter 808, and a power monitor 810 coupled in series to an input of the combiner 812.

25 IF up-converter 642 operates as follows. Modulator 804 receives the IF channel and also receives a carrier at a specific IF frequency (e.g., 1404 MHz for the top frequency shifter in FIG. 7B). Modulator 804 modulates the carrier by the IF channel. The modulated carrier

is adjusted in amplitude by variable gain block 806, which is controlled by the corresponding control system 290, and bandpass filtered by filter 808. Power monitor 810 monitors the power of the gain-adjusted and filtered signal, and transmits the power measurements to control system 290.

5 In a preferred embodiment, each IF channel has a target power level based on the estimated gain due to transmission through system 100. Control system 290 adjusts the gain applied by variable gain block 806 so that the actual power level, as measured by power monitor 810, matches the target power level. The target power level may be determined in any number of ways. For example, the actual power level may be required to fall within a
10 certain power range or be required to always stay above a minimum acceptable power. Alternately, it may be selected to maintain a minimum channel error rate or to maintain a channel error rate within a certain range. In this embodiment, variable gain block 806 implements the step of adjusting 321 the power of each low-speed channel 240.

In alternate embodiments, the power adjustment may be implemented by other
15 elements at other locations or even at more than one location. For example, one gain block may apply a common mode gain to all low-speed channels, and another series of gain blocks at a different location may apply individual gain to each channel (i.e., differential mode gain). However, applying the gain adjustment at the location of variable gain block 806 has some advantages. For example, if the power were adjusted prior to modulator 804, where each
20 low-speed channel consists of an I and a Q channel, care would need to be taken to ensure that the same gain was applied to both the I and Q channels in order to prevent distortion of the signal. Alternately, if the power were adjusted after combiner 812, it typically would be more difficult to adjust the power of each individual low-speed channel since combiner 812 produces a composite signal which includes multiple individual channels.

25 The inputs to combiner 812 are QAM-modulated IF signal at a specific frequency which have been power-adjusted to compensate for estimated gains in the rest of system 100. However, each frequency shifter uses a different frequency (e.g., ranging in equal increments

from 900 MHz to 1404 MHz in this example) so combiner 812 simply combines the 8 incoming QAM-modulated signal to produce a single signal (i.e., the RF channel) containing the information of all 8 incoming IF channels. In this example, the resulting RF channel covers the frequency range of 864-1440 MHz.

5 Referring to FIG. 8B, RF up-converter 644 is structured similar to IF up-converter 642 and performs a similar function combining the 8 RF channels received from the IF up-converter 642 just as each IF up-converter combines the 8 IF channels received by it. In more detail, RF up-converter 644 includes eight frequency shifters and a combiner 912. Each frequency shifter includes a mixer 904, various gain blocks 906, and various filter 908
10 coupled in series to an input of the combiner 912.

RF up-converter 644 operate as follows. Mixer 904 mixes one of the RF channels with a carrier at a specific RF frequency (e.g., 4032 MHz for the top frequency shifter in FIG. 8B), thus frequency upshifting the RF channel to RF frequencies. Gain blocks 906 and filters 908 are used to implement standard amplitude adjustment and frequency filtering. For
15 example, in FIG. 8B, one filter 908 bandpass filters the incoming RF channel and another bandpass filters the produced RF signal, both filters for suppressing artifacts outside the frequency range of interest. Each frequency shifter uses a different frequency (e.g., ranging in equal increments from 0 to 4032 MHz in this example) so combiner 912 simply combines the 8 incoming RF signals to produce the single electrical high-speed channel containing the
20 information of all 8 incoming RF channels or, equivalently, all 64 IF channels received by IF up-converter 642. In this example, the electrical high-speed channel covers the frequency range of 864-5472 MHz.

RF down-converter 624 and IF down-converter 622 implement the reverse functionalities, splitting the RF signal into its 8 constituent RF channels and then splitting
25 each RF channel into its 8 constituent IF channels, respectively, thus producing 64 IF channels (i.e., FDM channels) to be received by demodulator 620.

Referring to FIG. 8A, RF down-converter 624 includes a splitter 920 coupled to eight frequency shifters. Each frequency shifter includes a mixer 924, various gain blocks 926, and various filters 928 coupled in series. Splitter 920 splits the incoming electrical high-speed channel into eight different RF signals and each frequency shifter recovers a different constituent RF channel from the RF signal it receives. Mixer 924 mixes the received RF signal with a carrier at a specific RF frequency (e.g., 4032 MHz for the top frequency shifter in FIG. 8A), thus frequency downshifting the RF signal to its original IF range (e.g., 864-1440 MHz). Filter 928 then filters out this specific IF frequency range. Each frequency shifter uses a different RF frequency with mixer 924 and thus recovers a different RF channel. The output of RF down-converter 624 is the 8 constituent RF channels.

IF down-converter 622 of FIG. 7A operates similarly. It includes a splitter 820 and 8 frequency shifters, each including a bandpass filter 822, variable gain block 823, demodulator 824, and power monitor 826. Splitter 820 splits the incoming RF channel into eight signals, from which each frequency shifter will recover a different constituent IF channel. Filter 822 isolates the frequency band within the RF channel which contains the IF channels of interest. Demodulator 824 recovers the IF channel by mixing with the corresponding IF carrier. The resulting 64 IF channels are input to demodulator 620.

Variable gain block 823 and power monitor 826 control the power level of the resulting IF channel. In a preferred embodiment, each IF channel is output from IF down-converter 622 at a target power in order to enhance performance of the rest of the receiver 210A. Power monitor 826 measures the actual power of the IF channel, which is used to adjust the gain applied by variable gain block 823 in order to match the actual and target power levels. As described previously, the actual received power level for each low-speed channel may be used to estimate the gain of system 100. In IF down-converter 622, the actual receive power level may be determined by dividing the output target power for each IF channel by the gain applied by variable gain block 823 in order to maintain the output target

power. In another approach, the actual receive power level may be directly measured, for example by placing a power monitor where variable gain block 823 is located.

A preferred embodiment of method 300 will now be described, with reference to the bidirectional system 101 and the further details given in FIGS. 5-8. In the preferred method, the gain applied to each low-speed channel 240 is adjusted in order to optimize the channel error rate measured at the receiver 210A. Feedback occurs over fibers 104. More specifically, gain is applied to each of the low-speed channels 240 via variable gain block 806. This gain is initially selected based on an open-loop estimate. As data is transmitted from transmitter 210B(A) over fiber 104A to receiver 210A(B), trellis decoder 726 determines the channel error rate at the receiver 210A(B). The channel error rate is fed back to node 110A via the control channel on fiber 104B. In this embodiment, the control channel is a frequency modulated, alternate mark inverted, B8ZS-encoded baseband transmitted at 2 Mbps. The gain applied by variable gain block 806 is adjusted to optimize this channel error rate. One optimization approach alternates between differential mode and common mode adjustments. In the differential mode adjustment, the gain is increased for low-speed channels 240 which have unacceptable channel error rates and decreased for low-speed channels 240 with acceptable channel error rates, while keeping the overall power in all low-speed channels constant. In the common mode adjustment, if the median channel error rate is unacceptable, then the gain for all channels 240 is increased by equal increments until the median channel error rate is acceptable. In alternate embodiments, channel performance can be monitored by metrics other than the channel error rate, for example, received power, signal to noise ratio, or bit error rate.

It should be noted that many other implementations which achieve the same functionality as the devices in FIGS. 5-8 will be apparent. For example, referring to FIG. 8B, note that the bottom channel occupies the frequency spectrum from 864-1440 MHz and, therefore, no mixer 904 is required. As another example, note that the next to bottom channel is frequency up shifted from the 864-1440 MHz band to the 1440-2016 MHz. In a preferred

approach, this is not accomplished in a single step by mixing with a 576 MHz signal. Rather, the incoming 864-1440 MHz signal is frequency up shifted to a much higher frequency range and then frequency down shifted back to the 1440-2016 MHz range. This avoids unwanted interference from the 1440 MHz end of the original 864-1440 MHz signal. For example,
5 referring to FIG. 7B, in a preferred embodiment, the filters 808 are not required due to the good spectral characteristics of the signals at that point. A similar situation may apply to the other filters shown throughout, or the filtering may be achieved by different filters and/or filters placed in different locations. Similarly, amplification may be achieved by devices other than the various gain blocks shown. In a preferred embodiment, both RF down-
10 converter 624 and RF up-converter 644 do not contain variable gain elements. As one final example, in FIGS. 4-8, some functionality is implemented in the digital domain while other functionality is implemented in the analog domain. This apportionment between digital and analog may be different for other implementations. Other variations will be apparent.

The FDM aspect of preferred embodiment 400 has been described in the context of
15 combining 64 low-speed channels 240 into a single optical high-speed channel 120. The invention is in no way limited by this example. Different total numbers of channels, different data rates for each channel, different aggregate data rate, and formats and protocols other than the STS/OC protocol are all suitable for the current invention. In fact, one advantage of the FDM approach is that it is easier to accommodate low-speed channels which use different
20 data rates and/or different protocols. In other words, some of the channels 240B may use data rate A and protocol X; while others may use data rate B and protocol Y, while yet others may use data rate C and protocol Z. In the FDM approach, each of these may be allocated to a different carrier frequency and they can be straightforwardly combined so long as the underlying channels are not so wide as to cause the different carriers to overlap. In contrast,
25 in the TDM approach, each channel is allocated certain time slots and, essentially, will have to be converted to a TDM signal before being combined with the other channels.

Another advantage is lower cost. The FDM operations may be accomplished with low-cost components commonly found in RF communication systems. Additional cost savings are realized since the digital electronics such as modulator 640 and demodulator 620 operate at a relatively low data rate compared to the aggregate data rate. The digital electronics need only operate as fast as the data rate of the individual low-speed channels 240. This is in contrast to TDM systems, which require a digital clock rate that equals the aggregate transmission rate. For OC-192, which is the data rate equivalent to the high-speed channels 120 in system 100, this usually requires the use of relatively expensive gallium arsenide integrated circuits instead of silicon.

10 Moving further along transmitter 210B, E/O converter 240 preferably includes an optical source and an external optical modulator. Examples of optical sources include solid state lasers and semiconductor lasers. Example external optical modulators include Mach Zehnder modulators and electro-absorptive modulators. The optical source produces an optical carrier, which is modulated by the electrical high-speed channel as the carrier passes
15 through the modulator. The electrical high-speed channel may be predistorted in order to increase the linearity of the overall system. Alternatively, E/O converter 240 may be an internally modulated laser. In this case, the electrical high-speed channel drives the laser, the output of which will be a modulated optical beam (i.e., the optical high-speed channel 120B).

The wavelength of the optical high-speed channel may be controlled using a number
20 of different techniques. For example, a small portion of the optical carrier may be extracted by a fiber optic splitter, which diverts the signal to a wavelength locker. The wavelength locker generates an error signal when the wavelength of the optical carrier deviates from the desired wavelength. The error signal is used as feedback to adjust the optical source (e.g., adjusting the drive current or the temperature of a laser) in order to lock the optical carrier at
25 the desired wavelength. Other approaches will be apparent.

The counterpart on the receiver 210A is O/E converter 220, which typically includes a detector such as an avalanche photo-diode or PIN-diode. In an alternate approach, O/E

converter 220 includes a heterodyne detector. For example, the heterodyne detector may include a local oscillator laser operating at or near the wavelength of the incoming optical high-speed channel 120A. The incoming optical high-speed channel and the output of the local oscillator laser are combined and the resulting signal is detected by a photodetector.

- 5 The information in the incoming optical high-speed channel can be recovered from the output of the photodetector. One advantage of heterodyne detection is that the thermal noise of the detector can be overcome and shot noise limited performance can be obtained without the use of fiber amplifiers.

- The modularity of the FDM approach also makes the overall system more flexible and
10 scaleable. For example, frequency bands may be allocated to compensate for fiber characteristics. For a 70 km fiber, there is typically a null around 7 GHz. With the FDM approach, this null may be avoided simply by not allocating any of the frequency bands around this null to any low-speed channel 240. As a variant, each of the frequency bands may be amplified or attenuated independently of the others, for example in order to
15 compensate for the transmission characteristics of that particular frequency band.

- Various design tradeoffs are inherent in the design of a specific embodiment of an FDM-based system 100 for use in a particular application. For example, the type of Reed Solomon encoding may be varied or other types of forward error correction codes (or none at all) may be used, depending on the system margin requirements. As another example, in one
20 variation of QAM, the signal lattice is evenly spaced in complex signal space but the total number of states in the QAM constellation is a design parameter which may be varied. The optimal choices of number of states and other design parameters for modulator/demodulator 640/620 will depend on the particular application. Furthermore, the modulation may differ on some or all of the low speed channels. For example, some of the channels may use PSK
25 modulation, others may use 16-QAM, others may use 4-QAM, while still others may use an arbitrary complex constellation. The choice of a specific FDM implementation also involves a number of design tradeoffs, such as the choices of intermediate frequencies, whether to

implement components in the digital or in the analog domain, and whether to use multiple stages to achieve the multiplexing.

As a numerical example, in one embodiment, a (187,204) Reed-Solomon encoding may be used with a rate 3/4 16-QAM trellis code. The (187,204) Reed-Solomon encoding
5 transforms 187 bytes of data into 204 bytes of encoded data and the rate 3/4 16-QAM trellis code transforms 3 bits of information into a single 16-QAM symbol. In this example, a single low-speed channel 240B, which has a base data rate of 155 Mbps would require a symbol rate of $155 \text{ Mbps} \times (204/187) \times (1/3) = 56.6$ Megasymbols per second. Including an adequate guard band, a typical frequency band would be about 72 MHz to support this
10 symbol rate. Suppose, however, that it is desired to decrease the bandwidth of each frequency band. This could be accomplished by changing the encoding and modulation. For example, a (188,205) Reed-Solomon code with a rate 5/6 64-QAM trellis code would require a symbol rate of $155 \text{ Mbps} \times (205/188) \times (1/5) = 33.9$ Megasymbols per second or 43 MHz frequency bands, assuming proportional guard bands. Alternately, if 72 MHz frequency
15 bands were retained, then the data rate could be increased.

As another example, an optical modulator 240 with better linearity will reduce unwanted harmonics and interference, thus increasing the transmission range of system 100. However, optical modulators with better linearity are also more difficult to design and to produce. Hence, the optimal linearity will depend on the particular application. An example
20 of a system-level tradeoff is the allocation of signal power and gain between the various components. Accordingly, many aspects of the invention have been described in the context of the preferred embodiment of FIGS. 3-8 but it should be understood that the invention is not to be limited by this specific embodiment.

It should be noted that the embodiments described above are exemplary only and
25 many other alternatives will be apparent. For example, in the embodiments discussed above, the low-speed channels 240 were combined into an electrical high-speed channel using solely frequency division multiplexing. For example, each of the 64 low-speed channels 240B was

effectively placed on a carrier of a different frequency and these 64 carriers were then effectively combined into a single electrical high-speed channel solely on the basis of different carrier frequencies. This is not meant to imply that the invention is limited solely to frequency division multiplexing to the exclusion of all other approaches for combining
5 signals. In fact, in alternate embodiments, other approaches may be used in conjunction with frequency division multiplexing. For example, in one approach, 64 low-speed channels 240B may be combined into a single high-speed channel 120 in two stages, only the second of which is based on frequency division multiplexing. In particular, 64 low-speed channels 240B are divided into 16 groups of 4 channels each. Within each group, the 4 channels are
10 combined into a single signal using 16-QAM (quadrature amplitude modulation). The resulting QAM-modulated signals are frequency-division multiplexed to form the electrical high-speed channel.

As another example, it should be clear that the tributaries 160 may themselves be combinations of signals. For example, some or all of the OC-3/OC-12 tributaries 160 may be
15 the result of combining several lower data rate signals, using either frequency division multiplexing or other techniques. In one approach, time division multiplexing may be used to combine several lower data rate signals into a single OC-3 signal, which serves as a tributary 160.

As a final example, frequency division multiplexing has been used in all of the
20 preceding examples as the method for combining the low-speed channels 240 into a high-speed channel 120 for transmission across optical fiber 104. Other approaches could also be used. For example, the low-speed channels 240 could be combined using wavelength division multiplexing, in which the combining of channels occurs in the optical domain rather than in the electrical domain. In this approach, the low-speed channels are optical in form,
25 the optical power of each low-speed channel is adjusted, and the power-adjusted optical low-speed channels are combined using wavelength division multiplexing rather than frequency division multiplexing. Many of the principles described above may also be applied to the

wavelength division multiplexing approach. Although the invention has been described in considerable detail with reference to certain preferred embodiments thereof, other embodiments are possible. Therefore, the scope of the appended claims should not be limited to the description of the preferred embodiments contained herein.

1 WHAT IS CLAIMED IS:

- 1 1. In an optical fiber communications system, a method for compensating for frequency-
2 dependent gain effects in the communications system, the method comprising:
3 receiving at least two low-speed channels, each low-speed channel allocated a
4 different frequency band of an optical fiber communications system for
5 transmission across the communications system;
6 estimating a gain of the communications system for the frequency band allocated to
7 each of the low-speed channels; and
8 adjusting a power of each low-speed channel to compensate for the estimated gain of
9 the communications system.
- 1 2. The method of claim 1 further comprising:
2 frequency division multiplexing the power-adjusted low-speed channels to produce an
3 electrical high-speed channel for transmission across the communications
4 system.
- 1 3. The method of claim 2 wherein at least one low-speed channel is derived from an STS
2 signal.
- 1 4. The method of claim 2 wherein at least one low-speed channel is derived using a
2 quadrature-amplitude modulation.
- 1 5. The method of claim 2 wherein at least two low-speed channels are derived from
2 signals characterized by at least two different data rates.
- 1 6. The method of claim 2 wherein at least two low-speed channels are derived from
2 signals characterized by at least two different communications protocols.
- 1 7. The method of claim 2 wherein:
2 the communications system includes an optical fiber; and

3 the step of estimating a gain of the communications system comprises estimating a
4 gain for propagation through the optical fiber for the frequency band allocated
5 to the low-speed channel.

1 8. The method of claim 7 wherein the step of estimating a gain for propagation through
2 the optical fiber comprises estimating a gain due to chromatic dispersion for the frequency
3 band allocated to the low-speed channel.

1 9. The method of claim 7 wherein the step of estimating a gain for propagation through
2 the optical fiber comprises estimating a gain due to polarization mode dispersion for the
3 frequency band allocated to the low-speed channel.

1 10. The method of claim 7 wherein the step of estimating a gain for propagation through
2 the optical fiber comprises:
3 estimating a length of the optical fiber using time-domain reflectometry; and
4 estimating a gain for propagation through the optical fiber of the estimated length.

1 11. The method of claim 2 wherein
2 the communications system includes electronics; and
3 the step of estimating a gain of the communications system comprises estimating a
4 gain for propagation through the electronics.

1 12. The method of claim 2 wherein:
2 the step of estimating a gain of the communications system comprises receiving a
3 feedback signal responsive to the low-speed channel after it has been
4 transmitted across the optical fiber communications system; and
5 the step of adjusting the power of the low-speed channel is responsive to the feedback
6 signal.

1 13. The method of claim 12 wherein the feedback signal is responsive to a channel error
2 rate for the low-speed channel after it has been transmitted across the optical fiber
3 communications system.

1 14. The method of claim 12 wherein the feedback signal is responsive to a signal to noise
2 ratio for the low-speed channel after it has been transmitted across the optical fiber
3 communications system.

1 15. The method of claim 2 wherein the step of adjusting the power of each low-speed
2 channel comprises:
3 adjusting a total power of all of the low-speed channels while keeping an allocation of
4 the total power among the low-speed channels constant; and
5 adjusting the allocation of the total power among the low-speed channels while
6 keeping the total power constant.

1 16. An optical fiber communications system for transmitting at least two low-speed
2 channels across the communications system, the communications system comprising:
3 a variable gain block for adjusting a power of each low-speed channel to compensate
4 for an estimated gain of the communications system for a frequency band
5 allocated to the low-speed channel; and
6 a FDM multiplexer coupled to the variable gain block for combining the power-
7 adjusted low-speed channels into an electrical high-speed channel suitable for
8 transmission across the communications system.

1 17. The communications system of claim 16 further comprising:
2 receive circuitry coupled to the variable gain block for receiving an STS signal,
3 wherein at least one low-speed channel is derived from the STS signal.

- 1 18. The communications system of claim 16 further comprising:
2 a quadrature-amplitude modulator coupled to the variable gain block for applying a
3 quadrature-amplitude modulation to at least one of the low-speed channels.
- 1 19. The communications system of claim 16 further comprising:
2 first receive circuitry coupled to the variable gain block for receiving a first signal
3 characterized by a first data rate, wherein at least one low-speed channel is
4 derived from the first signal; and
5 second receive circuitry coupled to the variable gain block for receiving a second
6 signal characterized by a second data rate different from the first data rate,
7 wherein at least one low-speed channel is derived from the second signal.
- 1 20. The communications system of claim 16 further comprising:
2 first receive circuitry coupled to the variable gain block for receiving a first signal
3 characterized by a first communications protocol, wherein at least one low-
4 speed channel is derived from the first signal; and
5 second receive circuitry coupled to the variable gain block for receiving a second
6 signal characterized by a second communications protocol different from the
7 first communications protocol, wherein at least one low-speed channel is
8 derived from the second signal.
- 1 21. The communications system of claim 16 wherein the estimated gain of the
2 communications system comprises a gain for propagation through an optical fiber for the
3 frequency band allocated to the low-speed channel.
- 1 22. The communications system of claim 21 wherein the gain for propagation through the
2 optical fiber comprises a gain due to chromatic dispersion for the frequency band allocated to
3 the low-speed channel.

1 23. The communications system of claim 21 wherein the gain for propagation through the
2 optical fiber comprises a gain due to polarization mode dispersion for the frequency band
3 allocated to the low-speed channel.

1 24. The communications system of claim 21 further comprising:
2 a time-domain reflectometer for estimating a length of the optical fiber, wherein the
3 gain for propagation through the optical fiber includes a gain for propagation
4 through the optical fiber of the estimated length.

1 25. The communications system of claim 16 wherein the estimated gain of the
2 communications system comprises a gain for propagation through electronics.

1 26. The communications system of claim 16 further comprising:
2 a control system coupled to the variable gain block for receiving a feedback signal
3 responsive to the low-speed channel after it has been transmitted across the
4 optical fiber communications system and further for adjusting the variable
5 gain block responsive to the feedback signal.

1 27. The communications system of claim 26 wherein the feedback signal is responsive to
2 a channel error rate for the low-speed channel after it has been transmitted across the optical
3 fiber communications system.

1 28. The communications system of claim 27 further comprising:
2 a forward error correction encoder coupled to the variable gain block for applying a
3 forward error correction code to the low-speed channels, wherein the channel
4 error rate includes a number of errors detected according to the forward error
5 correction code.

1 29. The communications system of claim 26 wherein the feedback signal is responsive to
2 a signal to noise ratio for the low-speed channel after it has been transmitted across the
3 optical fiber communications system.

1 30. The communications system of claim 26 wherein the feedback signal is responsive to
2 a power of the low-speed channel after it has been transmitted across the optical fiber
3 communications system.

1 31. The communications system of claim 16 further comprising:
2 a control system coupled to the variable gain block for adjusting the variable gain
3 block responsive to a feedback signal;
4 an E/O converter coupled to the FDM multiplexer for converting the electrical high-
5 speed channel to an optical high-speed channel;
6 an optical fiber coupled to the E/O converter for transporting the optical high-speed
7 channel across the optical fiber communications system;
8 an O/E converter coupled to the optical fiber for converting the optical high-speed
9 channel to the electrical high-speed channel;
10 a FDM demultiplexer coupled to the O/E converter for frequency division
11 demultiplexing the electrical high-speed channel into the low-speed channels;
12 and
13 monitor circuitry coupled to the FDM demultiplexer for generating the feedback
14 signal responsive to the frequency division demultiplexed low-speed channels.

1 32. The communications system of claim 31 further comprising:
2 a forward error correction encoder coupled to the variable gain block for applying a
3 forward error correction code to the low-speed channels;
4 wherein the monitor circuitry includes a forward error correction decoder for
5 determining a number of errors according to the forward error correction code
6 and generating the feedback signal responsive to the number of errors.


1 33. The communications system of claim 31 wherein the monitor circuitry includes a
2 power monitor for monitoring the power of each low-speed channel and generating the
3 feedback signal responsive to the measured power.

1 34. The communications system of claim 16 wherein the variable gain block comprises:
2 a common mode gain block and a differential mode gain block coupled in series, the
3 common mode gain block for adjusting a total power of all of the low-speed
4 channels while keeping an allocation of the total power among the low-speed
5 channels constant, and the differential mode gain block for adjusting the
6 allocation of the total power among the low-speed channels while keeping the
7 total power constant.

1 35. The communications system of claim 16 wherein, for each low-speed channel, the
2 variable gain block comprises:
3 a variable gain element for adjusting a power of each low-speed channel according to
4 a control signal; and
5 a power monitor coupled to the variable gain element for monitoring the power of
6 each low-speed channel and generating the control signal to maintain the
7 power at a desired level.

1/10

FIG. 1A

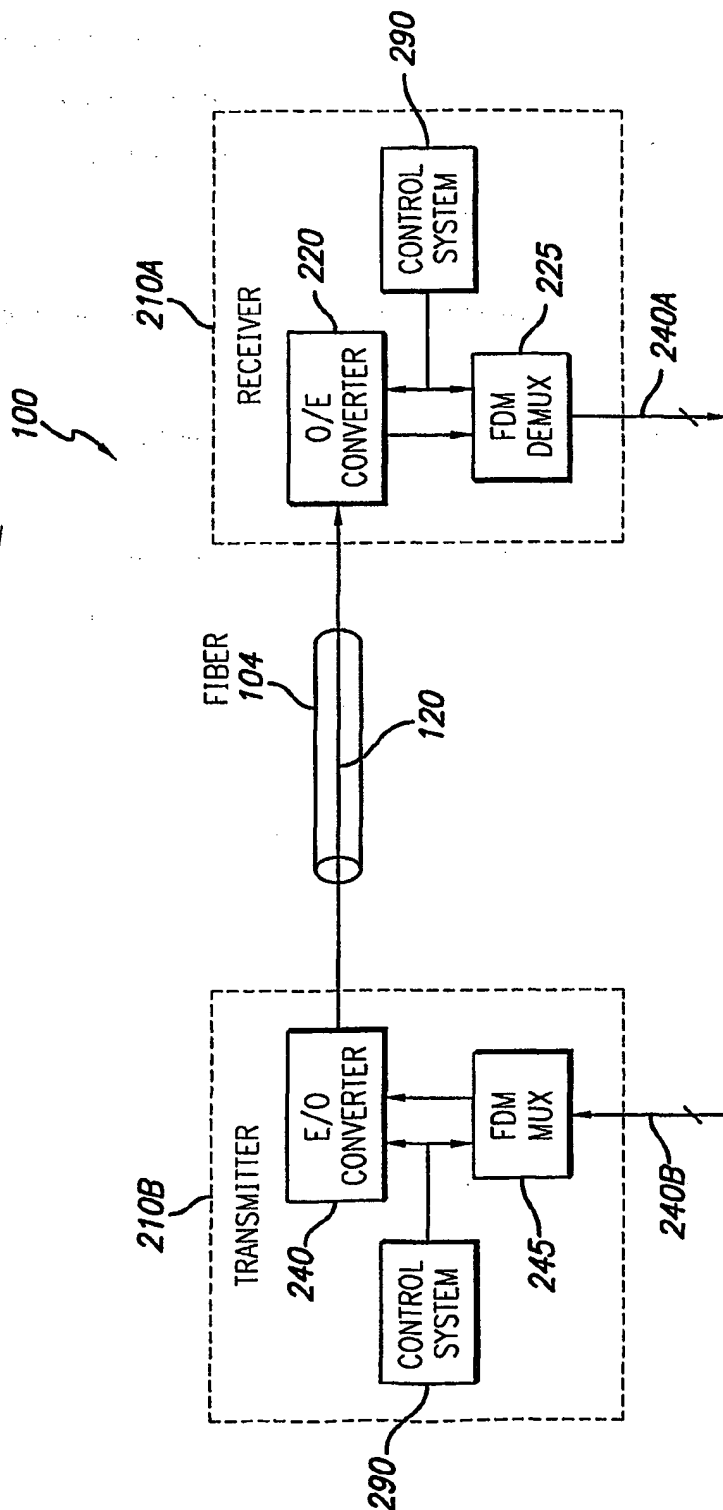

2/10

FIG. 1B


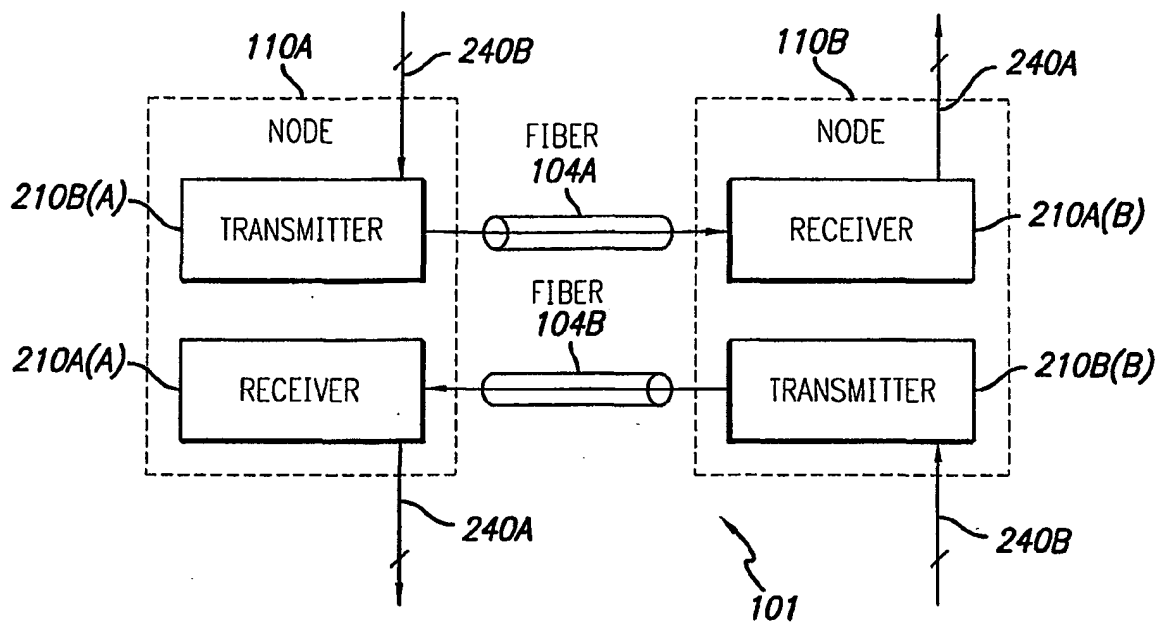


FIG. 2

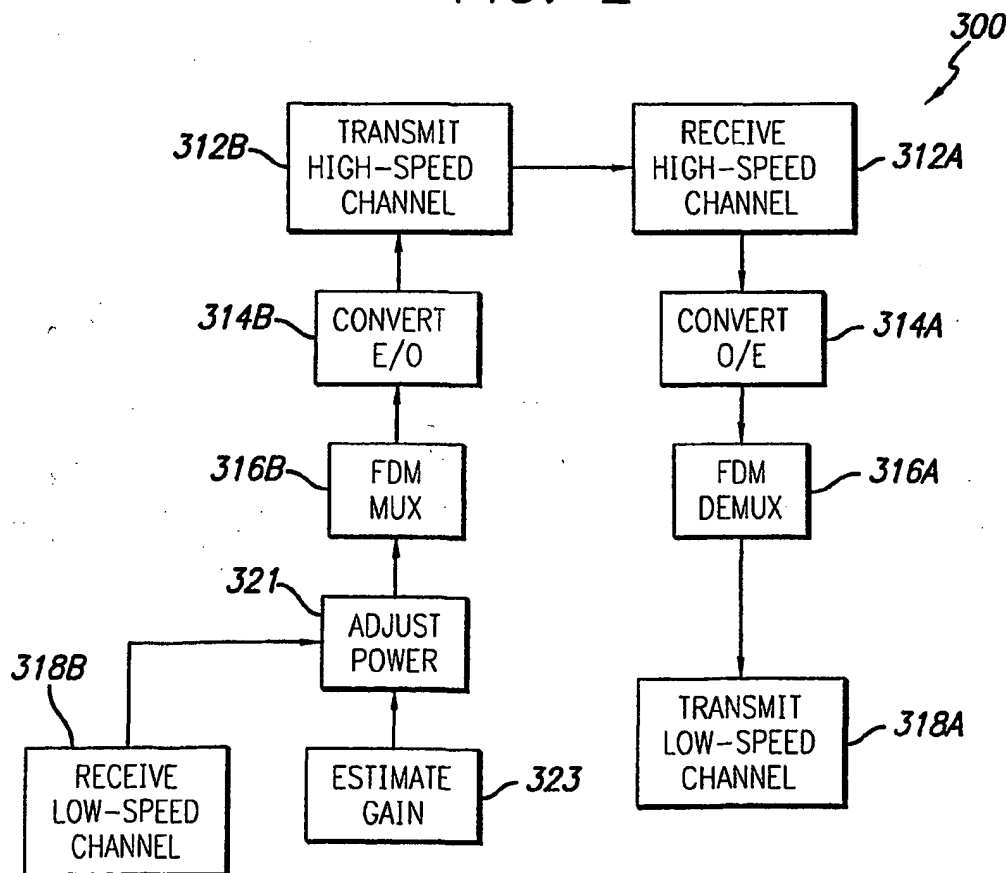

3/10

FIG. 3A




FIG. 3B


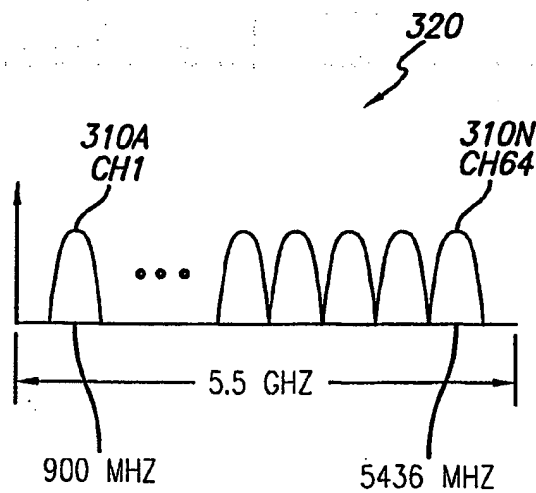


FIG. 3C

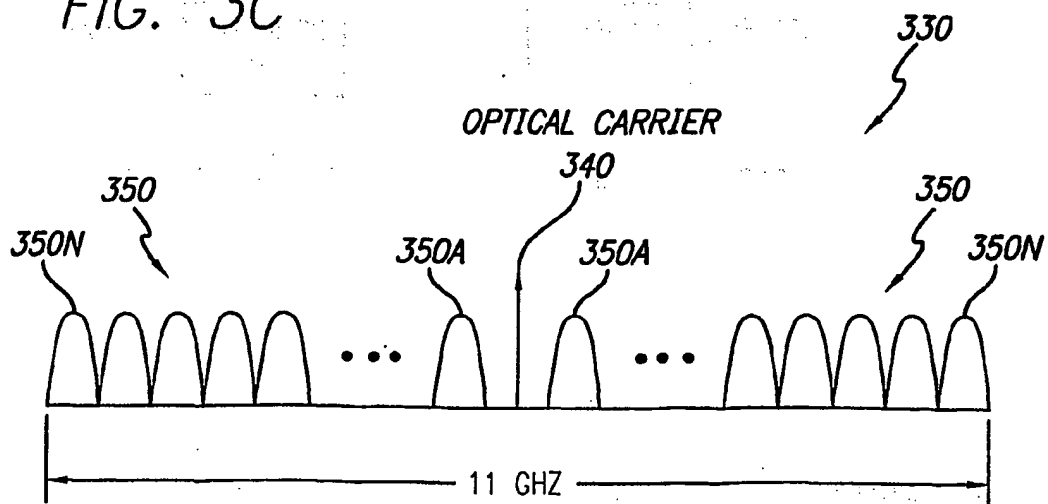

4/10

FIG. 4A




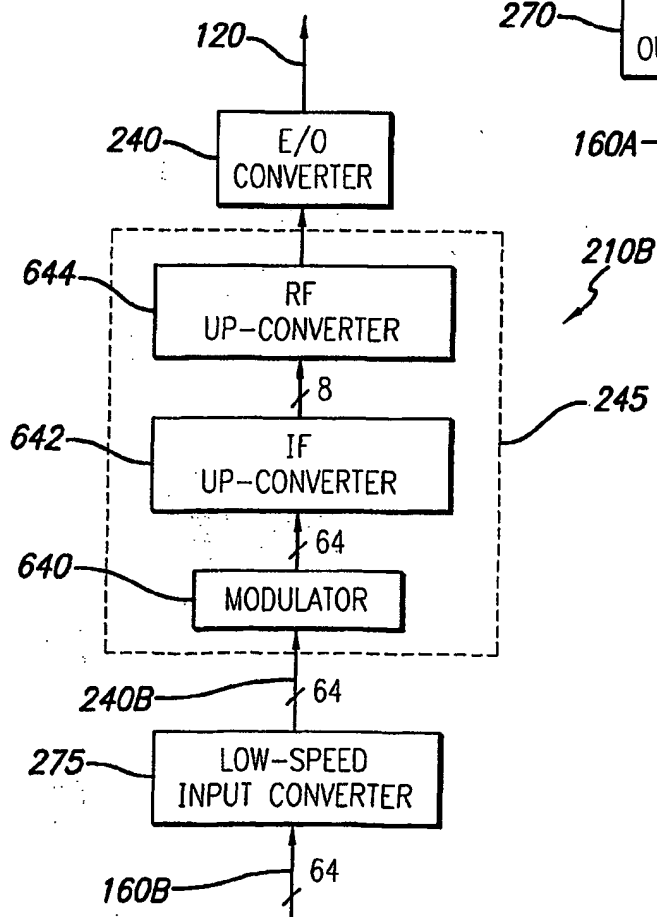


FIG. 4B

5/10

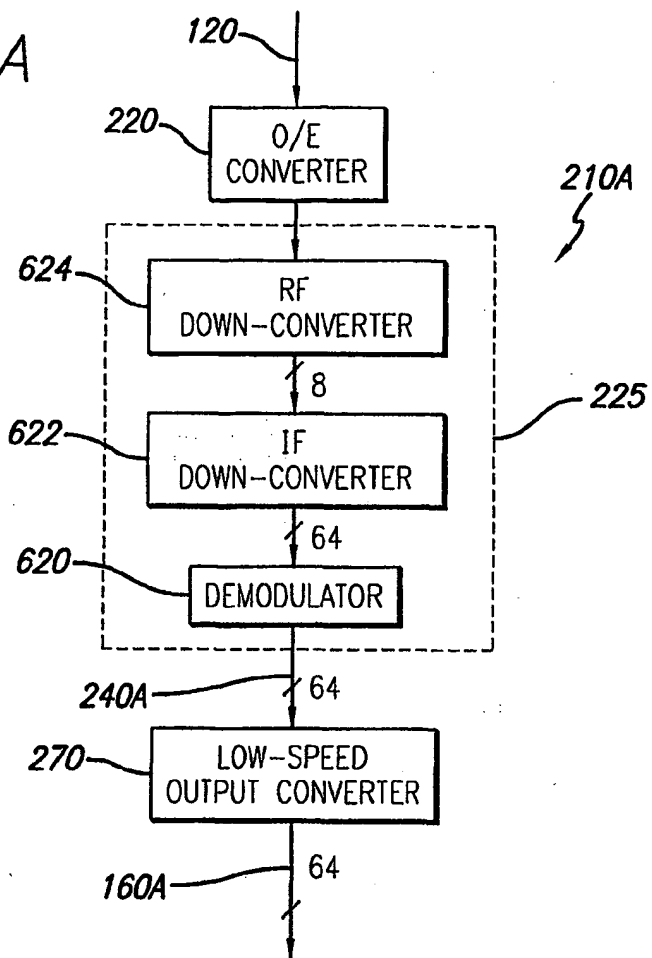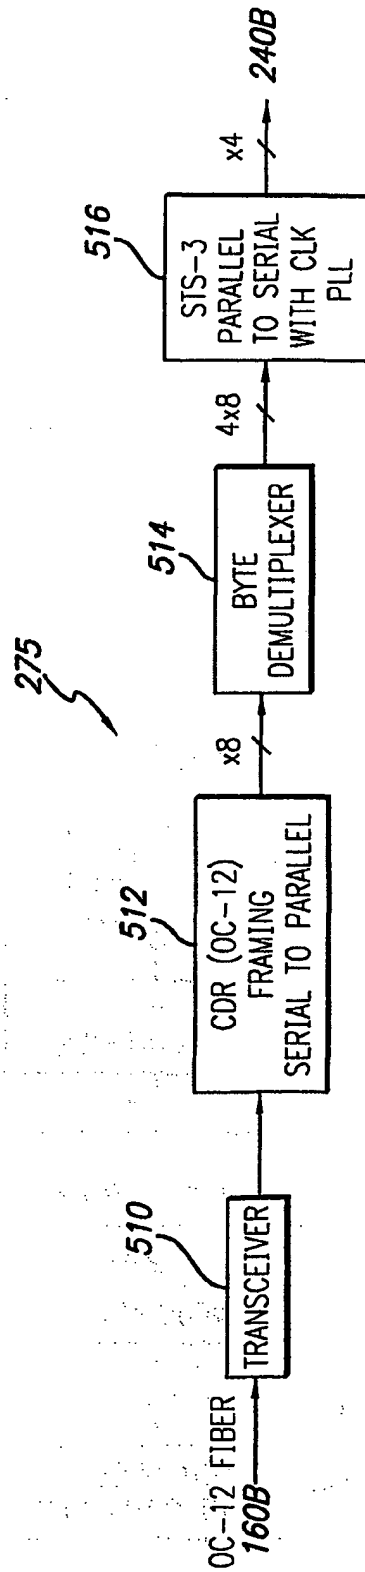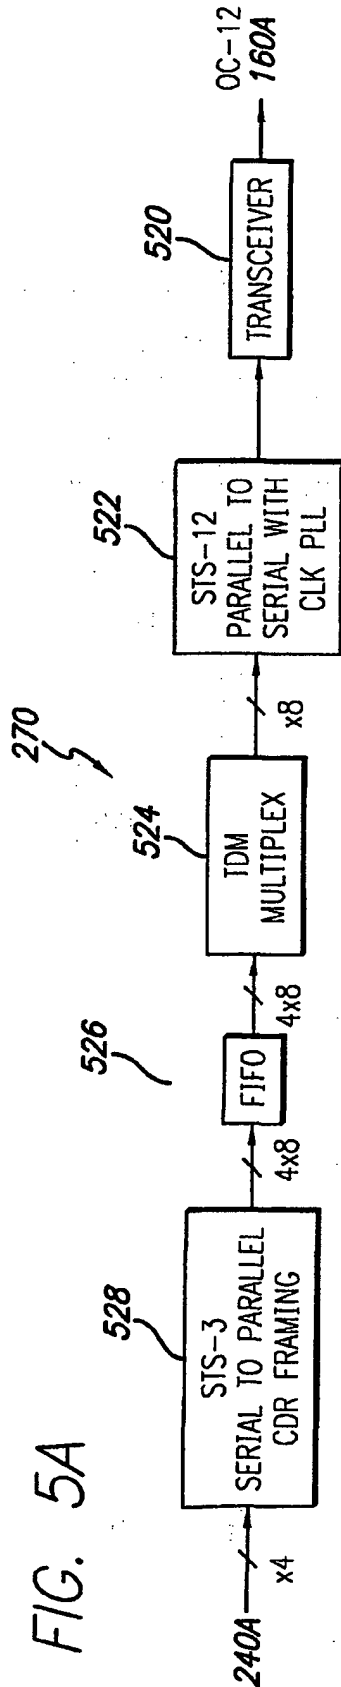

6/10

FIG. 6A

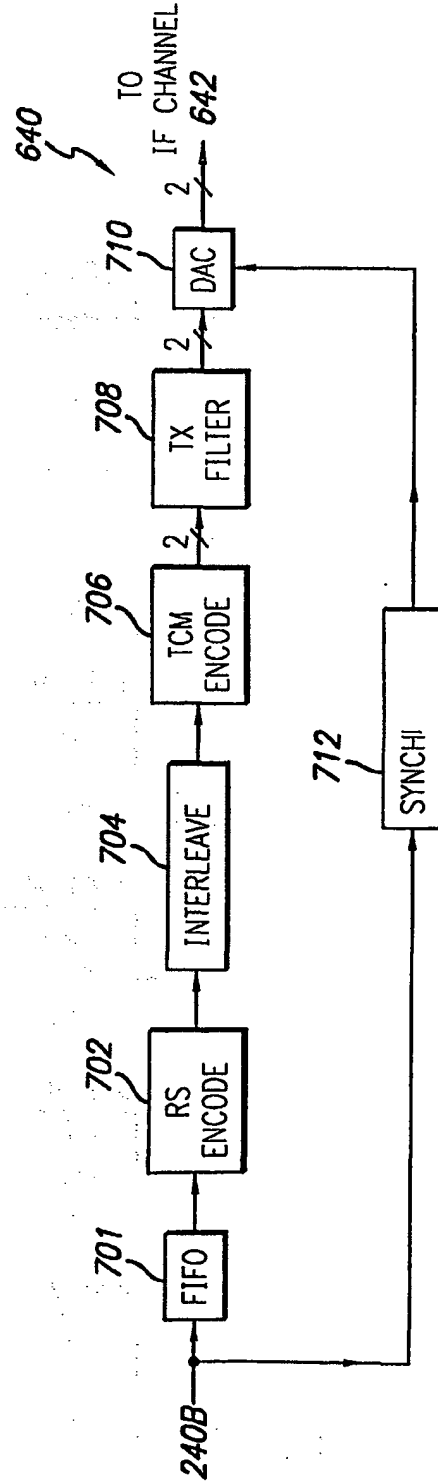
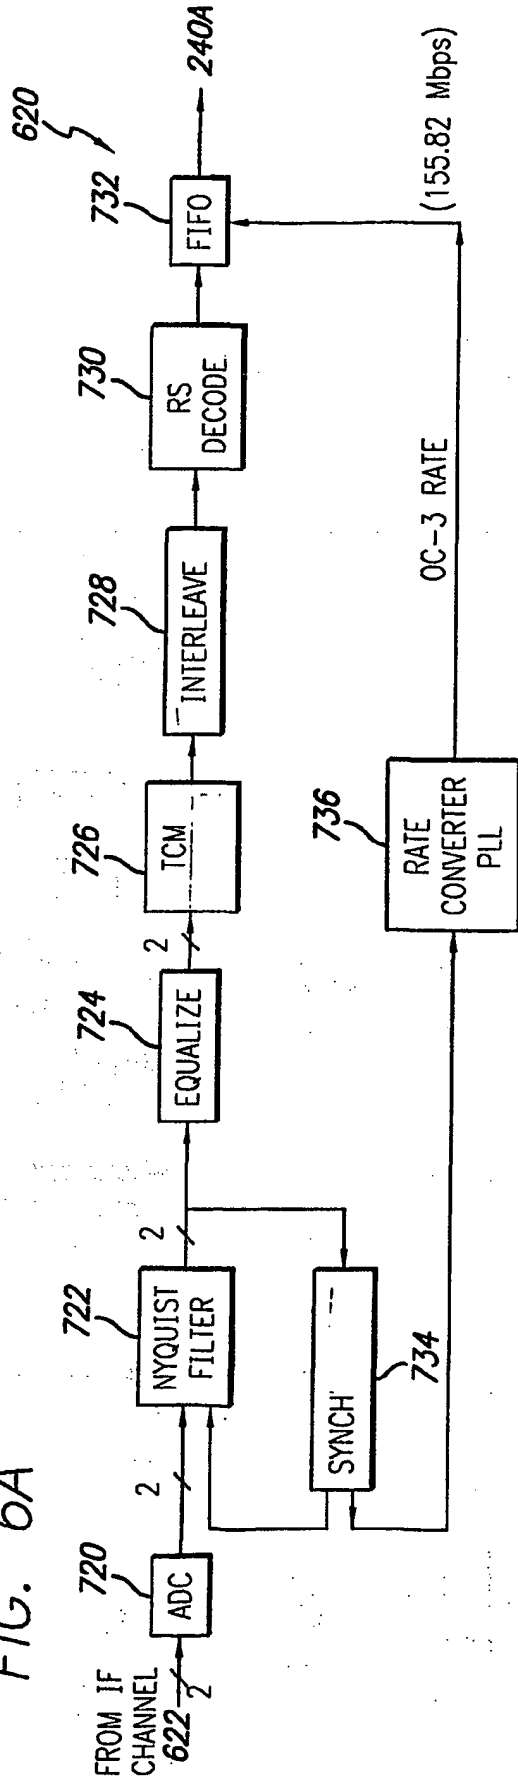
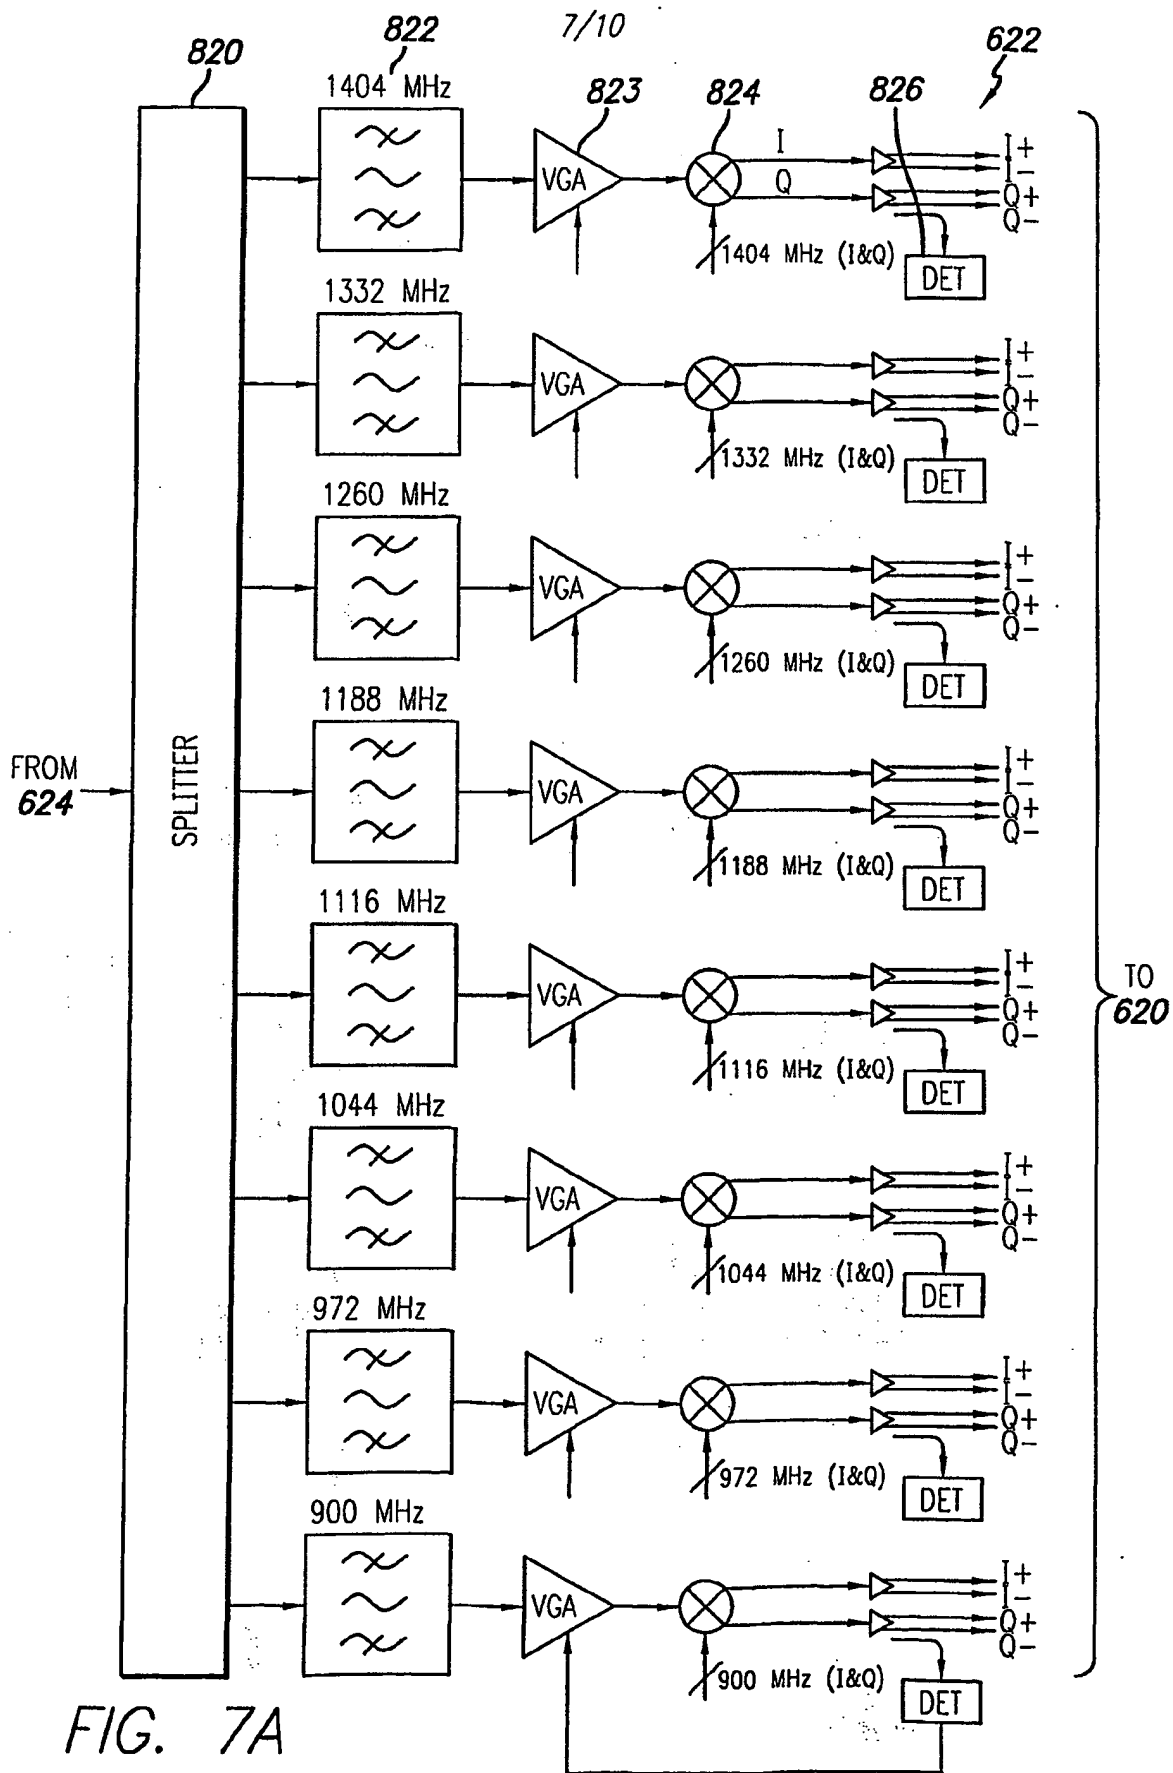


FIG. 6B




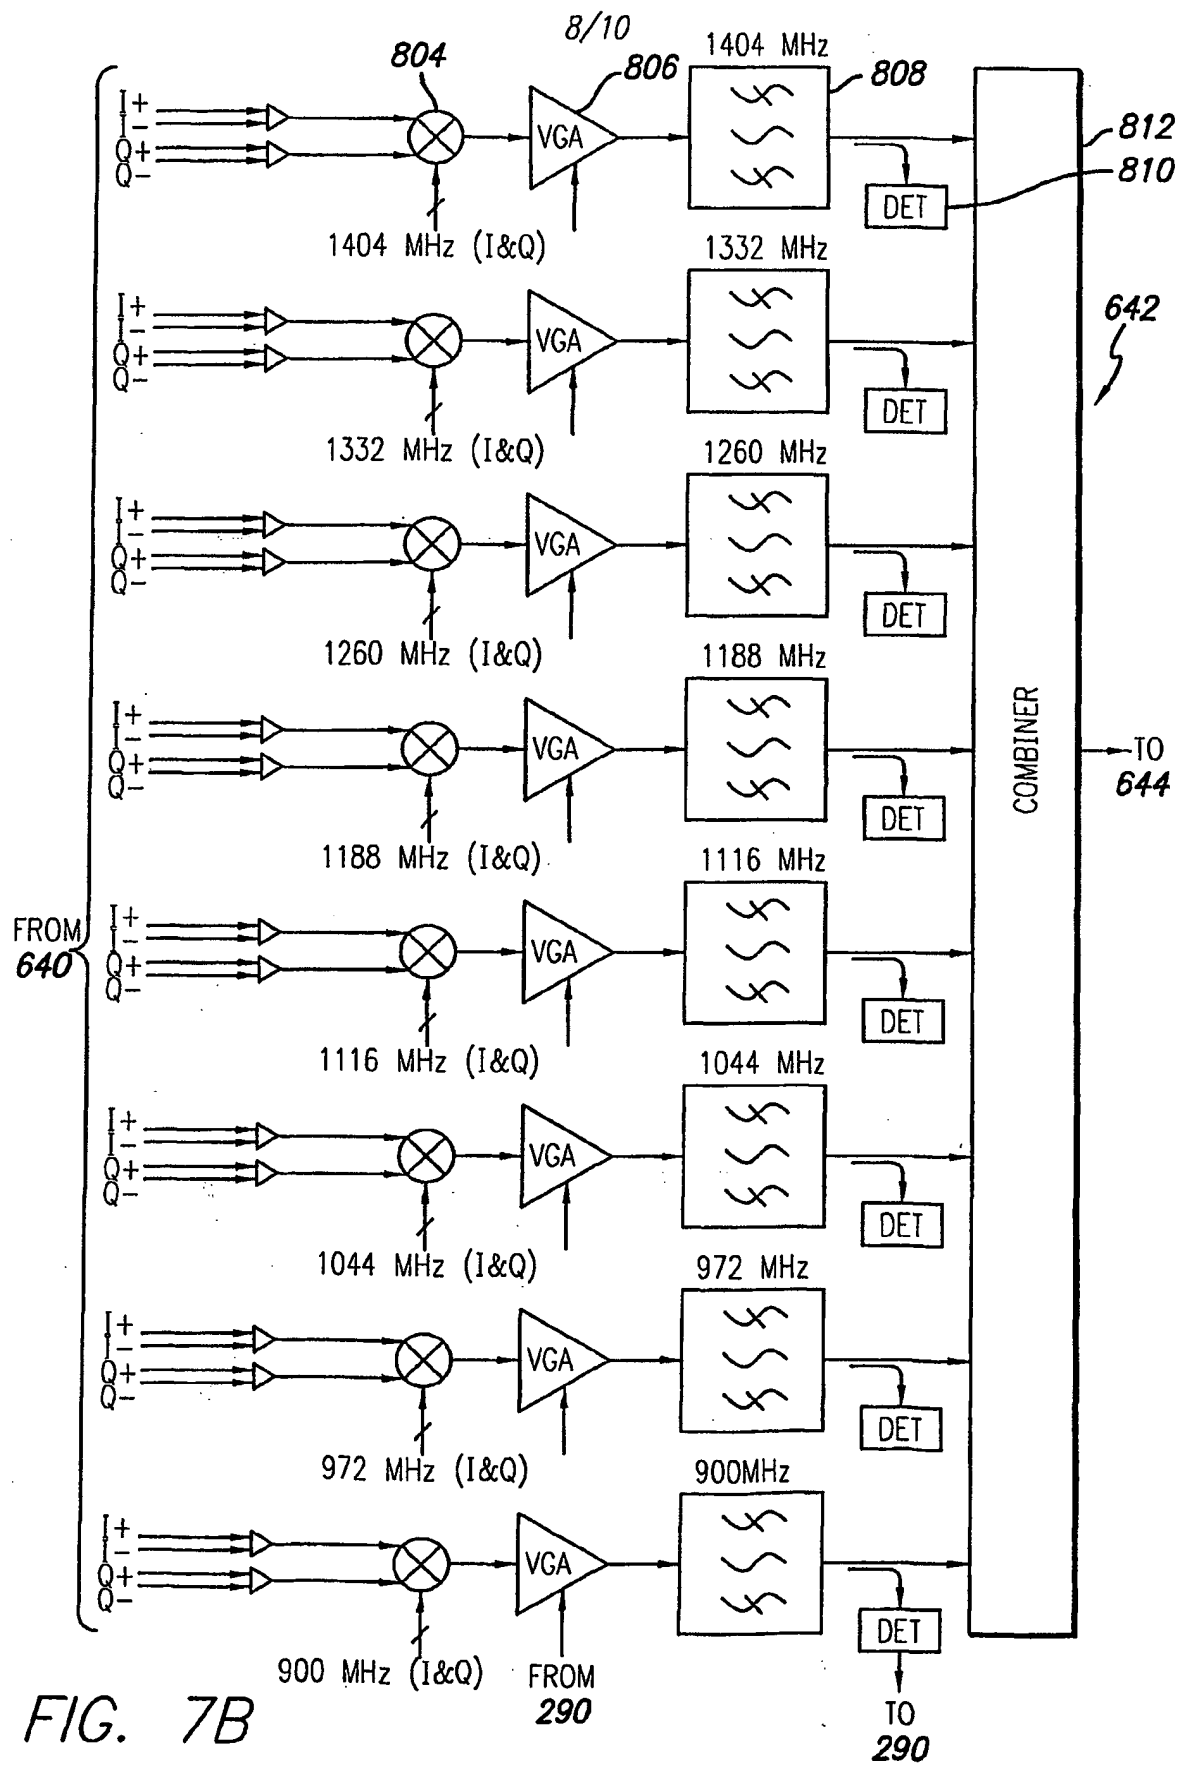



FIG. 7B

FIG. 8A

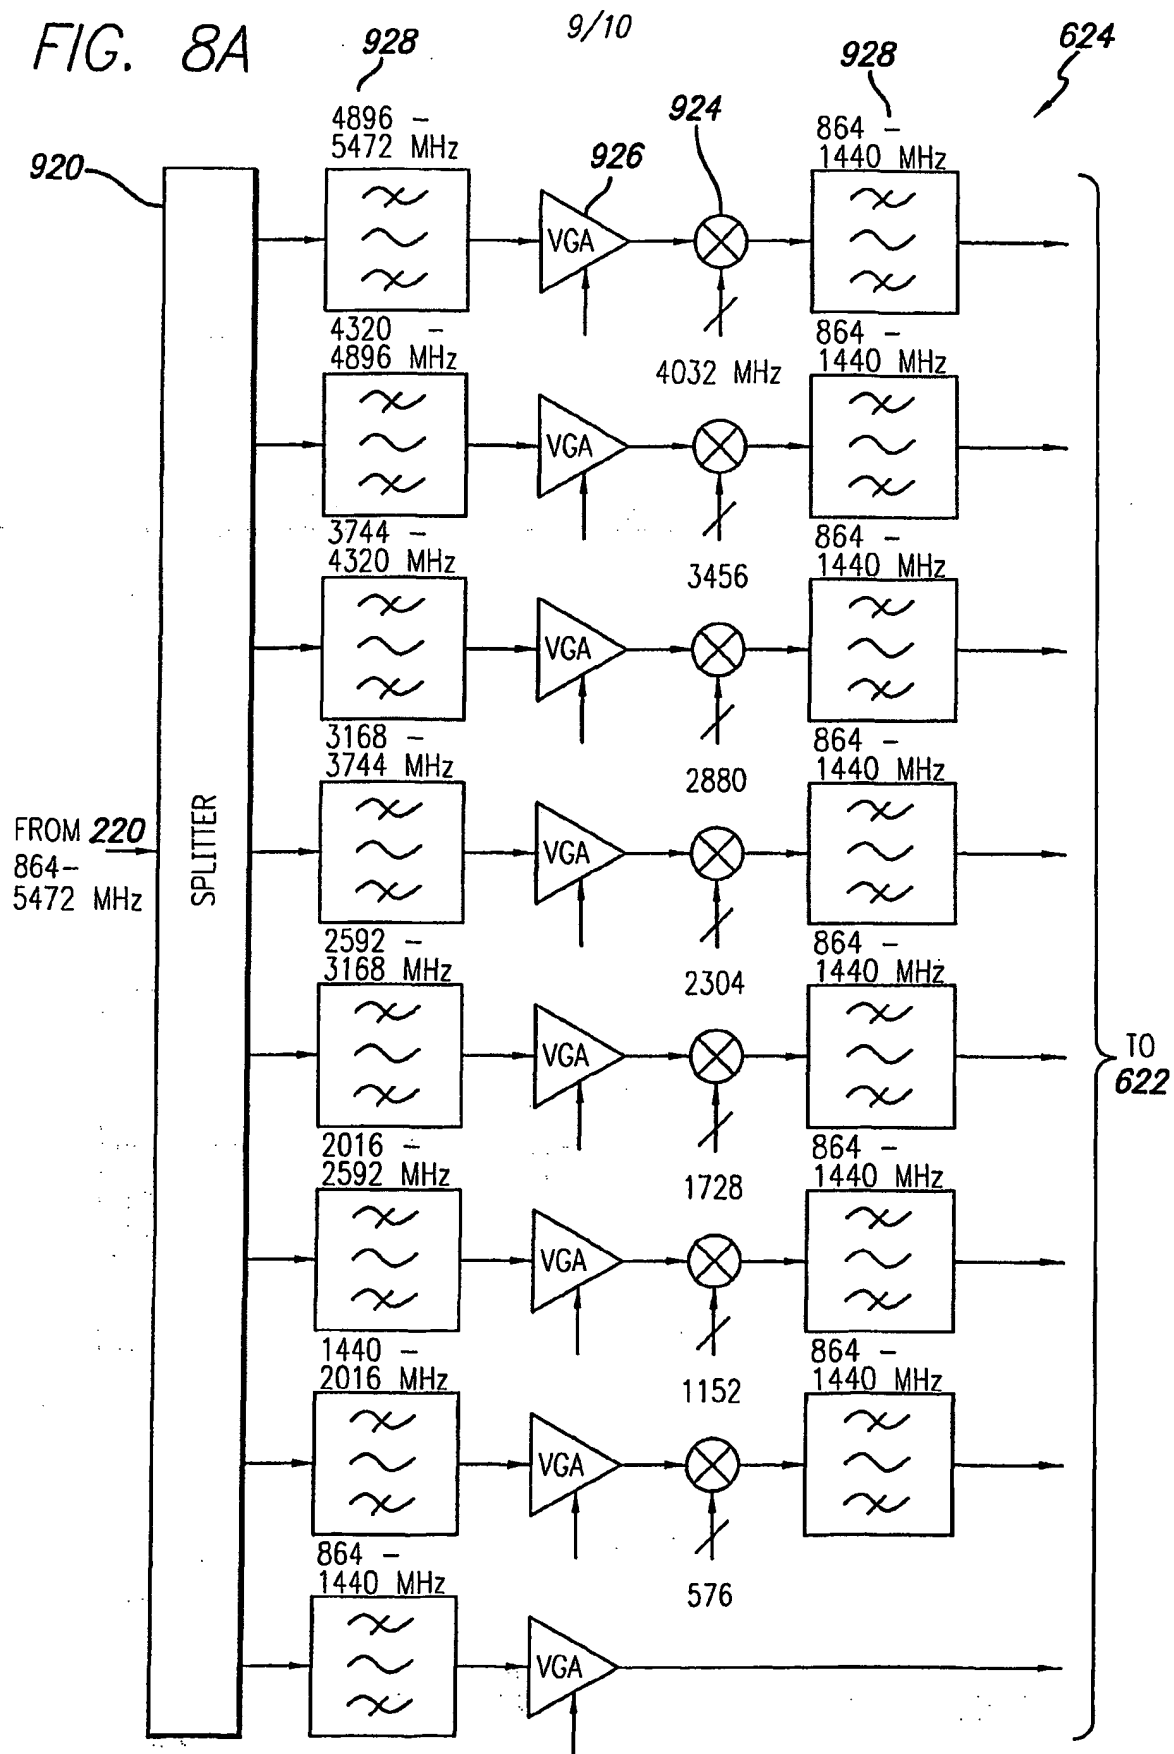

10/10

FIG. 8B

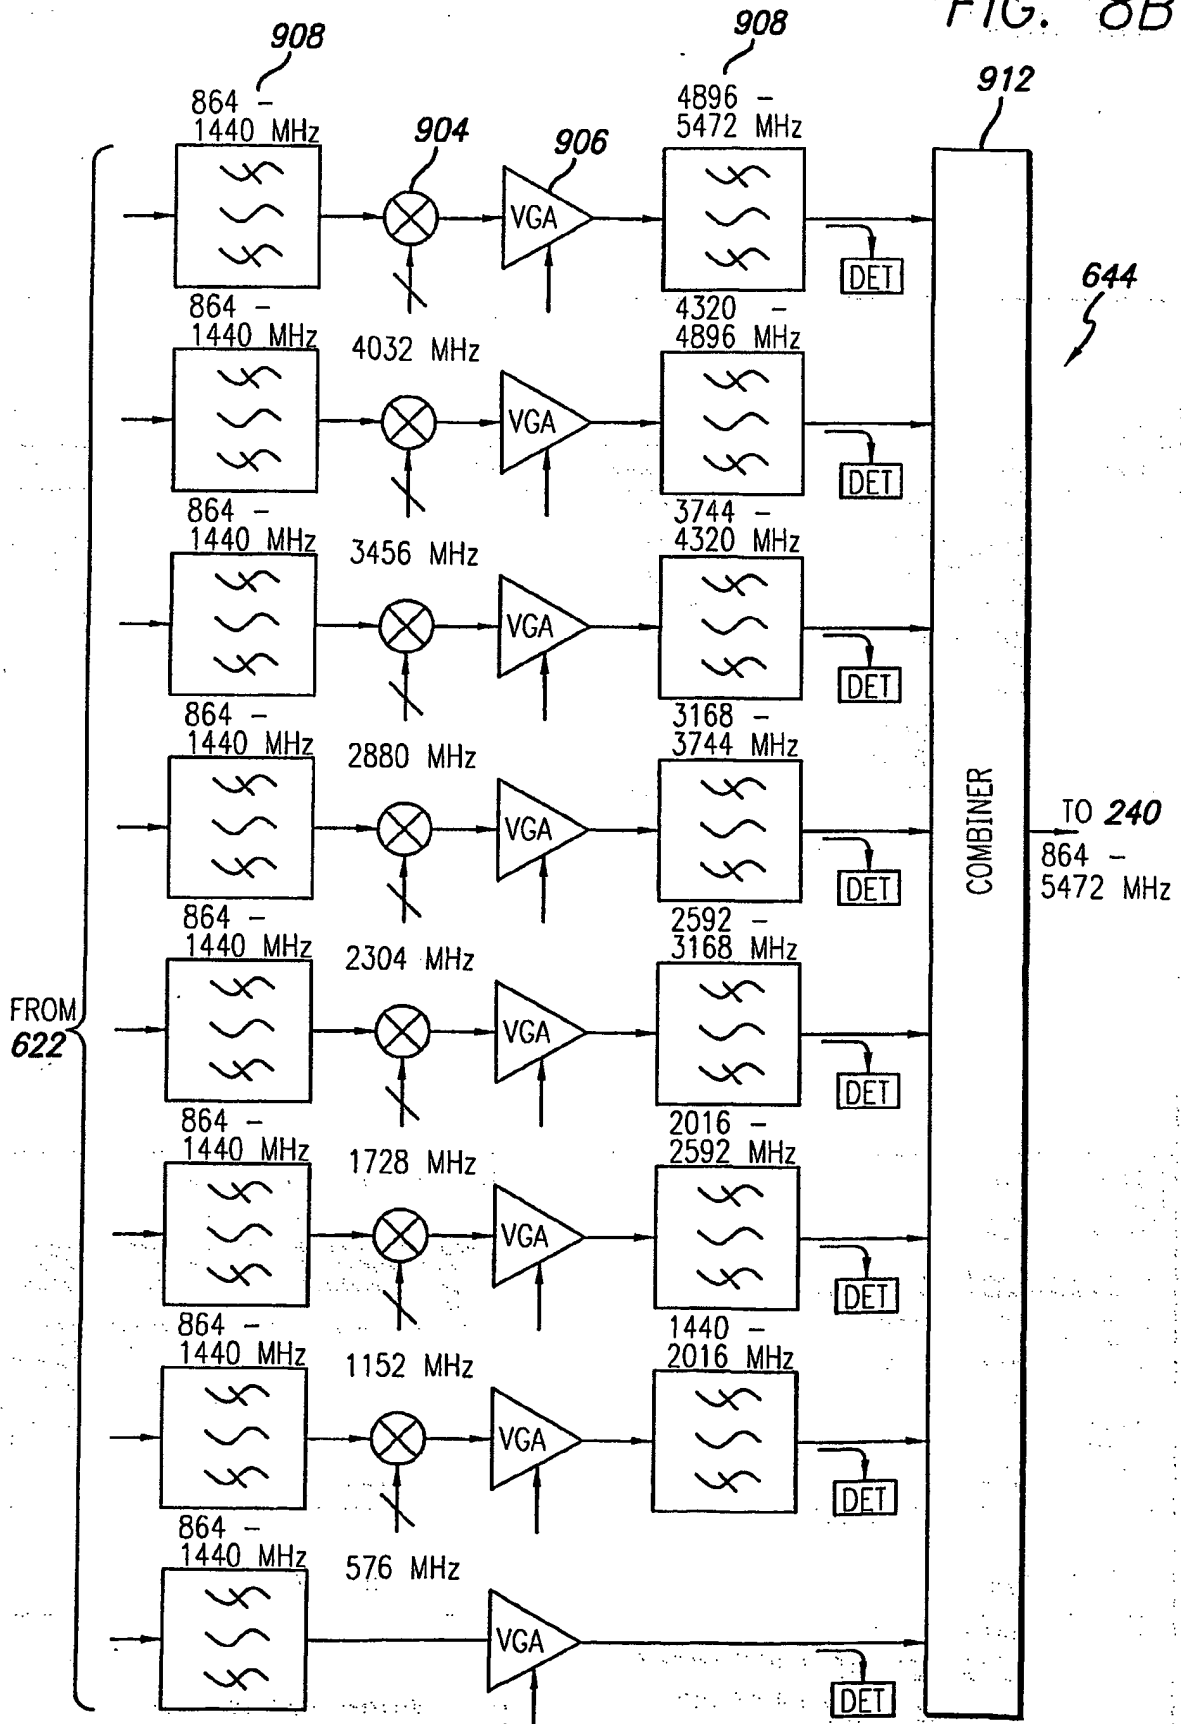

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04B10/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04J H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SCHLUMP ET AL: "Electronic equalisation of PMD and chromatic dispersion induced distortion after 100 km standard fibre at 10 Gbit/s" PROCEEDINGS OF THE EUROPEAN CONFERENCE ON OPTICAL COMMUNICATION, 20 September 1998 (1998-09-20), XP002126317 left-hand column, paragraph 1 -right-hand column, paragraph 7; figures 1,2 --- -/--	1,2,7-9, 11,13, 16, 21-23, 25-27,35

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the International search

19 January 2001

Date of mailing of the international search report

26/01/2001

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Roldán Andrade, J

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 430 568 A (FRYMYER DON E ET AL) 4 July 1995 (1995-07-04)</p> <p>column 1, line 9 - line 13 column 2, line 51 -column 3, line 59 column 4, line 45 -column 7, line 47; figures 1,2 column 8, line 64 -column 9, line 10 column 9, line 30 -column 12, line 28; figures 5,6</p> <p>-----</p>	<p>1,2,7,8, 11,15, 16,21, 22,25,34</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern

Application No

PCT/US 00/26157

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5430568 A	04-07-1995	AU 673223 B	31-10-1996
		AU 5678994 A	22-06-1994
		CN 1094552 A	02-11-1994
		EP 0705509 A	10-04-1996
		IL 107826 A	14-11-1996
		JP 8503827 T	23-04-1996
		WO 9413076 A	09-06-1994